



REVISIONS			DWG. NO.	SH	REV.
ZONE	LTR	DESCRIPTION	DATE	APPROVED	

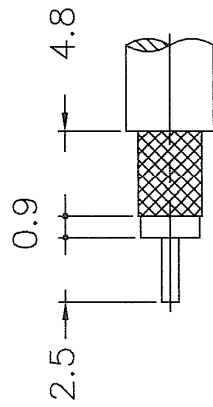

RECOMMENDED
CABLE STRIPPING DIM'S

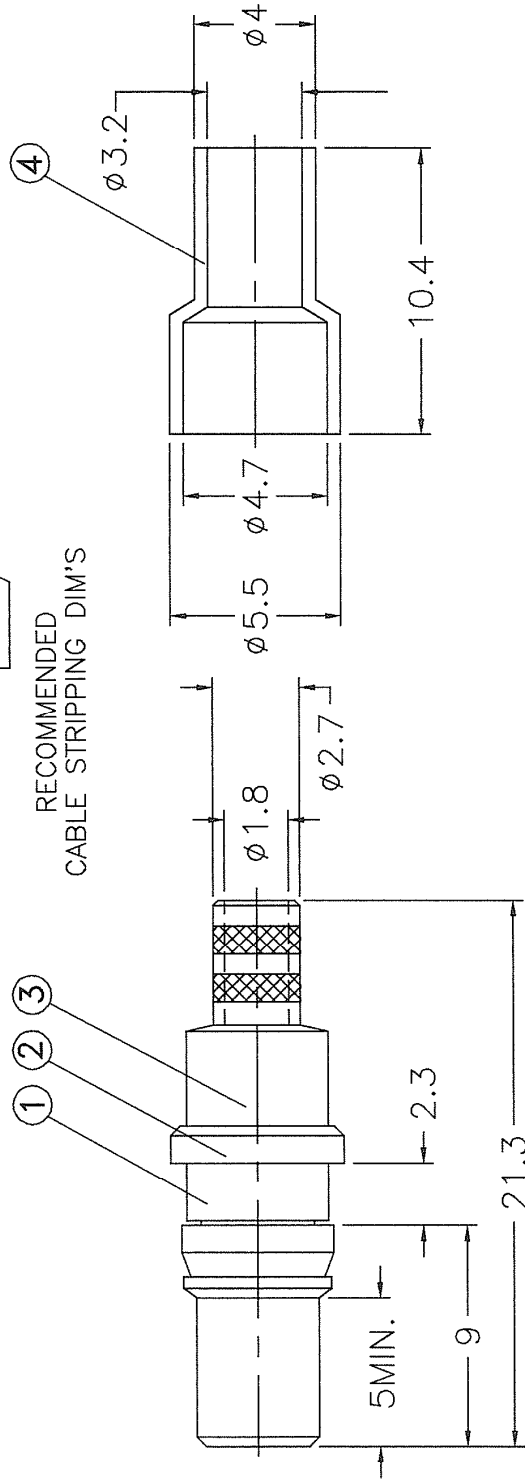

TITLE
D-SUB CRIMP PLUG
(FOR RG-174/U, 188A/U, 316/U)

DESCRIPTION	MATERIAL	FINISH	DIMENSIONS ARE IN MILLIMETERS UNLESS OTHERWISE SPECIFIED TOLERANCES ARE:		APPROVALS	DATE	REV.
1 BODY	BRASS	NICKEL	0.5-6	± 0.2	DRAWN	B.BURTON	4/15/96
2 INSULATOR	TEFLON	NATURAL	6-30	± 0.4	CHECKED		
3 CONTACT	PHOSPHOR BRONZE	GOLD	30-120	± 0.6	ISSUED		
4 FERRULE	BRASS	NICKEL	120-315	± 1			
5			315-1000	± 1.6			
6			1000-2000	± 2.4			
7			DO NOT SCALE DRAWING				
8							

SIZE FSCM NO. DWG. NO. REV.
A 99001 212100.DWG

SCALE 3.5:1 PART NO. 212100 SHEET 1 OF 1