



REVISIONS			DWG. NO.	SH	REV.
ZONE	LTR	DESCRIPTION	DATE	APPROVED	

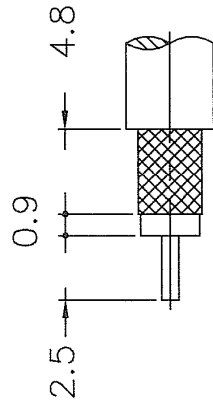

RECOMMENDED
CABLE STRIPPING DIM'S

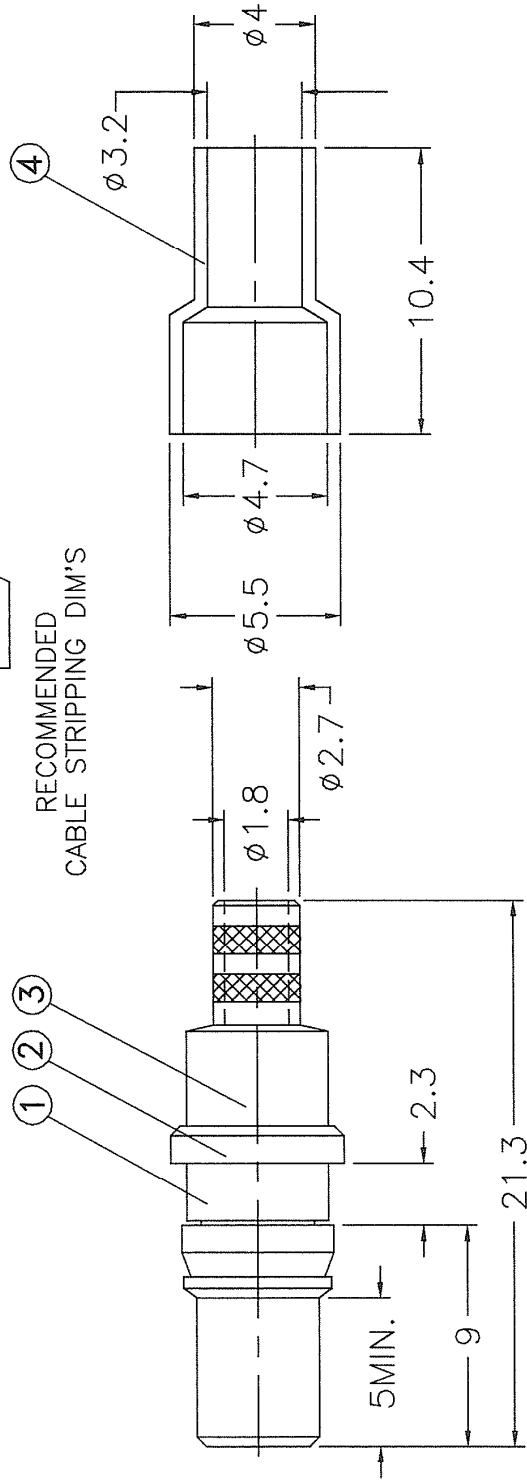

D-SUB CRIMP PLUG
(FOR RG-174/U, 188A/U, 316/U)

DESCRIPTION	MATERIAL	FINISH	DIMENSIONS ARE IN MILLIMETERS UNLESS OTHERWISE SPECIFIED TOLERANCES ARE:		APPROVALS	DATE
1 BODY	BRASS	NICKEL	0.5-6	± 0.2	DRAWN B.BURTON	4/15/96
2 INSULATOR	TEFLON	NATURAL	6-30	± 0.4	CHECKED	
3 CONTACT	PHOSPHOR BRONZE	GOLD	30-120	± 0.6	ISSUED	
4 FERRULE	BRASS	NICKEL	120-315	± 1		
5			315-1000	± 1.6		
6			1000-2000	± 2.4		
7			DO NOT SCALE DRAWING			
8						

TITLE	SIZE	FSCM NO.	DWG. NO.	REV.
A	99001	212100.DWG		
SCALE	3.5:1	PART NO.	212100	SHEET 1 OF 1