



IP67 FC (for L type only)

IS 15885(Part 2/Sec13)

R-41027766 (for LPV-150-12,24 only)

cULus

EAC CE (for Blank type only)

### Features

- Constant voltage design
- 90~132VAC input for LPVL-150  
180~305VAC input for LPV-150
- Fully encapsulated with IP67 level (Note.8)
- Class II power unit, no FG
- Protections: Short circuit/Overload/Over voltage/  
Over temperature
- Fully isolated plastic case
- Fanless design, cooling by free air convection
- 100% full load burn-in test
- Low cost, high reliability
- Listed in UL Sign Component Manual (SAM)
- Type "HL" for use in class I, Division 2 hazardous (Classified)  
location luminaires for LPVL-150
- 2 years warranty

### Applications

- Suitable for LED related  
fixture or appliance  
(such as LED Decoration  
or Advertisement devices)

### Description

LPV-150 and LPVL-150 are 150W single output power supplies that specifically and perfectly work for LED lighting and LED moving sign applications. As a class II power unit, these two series are housed with the UL 94V-0 rated flame retardant plastic enclosure. The IP67 design allows every model to fit the use at dry, damp and wet locations. Both series are constant voltage mode design that various models with 12V, 15V, 24V, 36V and 48V are offered for LPV-150 where as 12V and 24V are provided for LPVL-150.

### Model Encoding

LPV **L** - 150 - **12**

Output voltage

Output wattage

Blank: AC input range 180~305VAC

L: AC input range 90~132VAC

Series name





**SPECIFICATION**


| MODEL               |  | LPV□-150-12   | LPV-150-15  | LPV□-150-24 | LPV-150-36 | LPV-150-48 |  |
|---------------------|--|---|---|-------------|------------|------------|--|
| OUTPUT              | DC VOLTAGE   | 12V   | 15V   | 24V         | 36V        | 48V        |  |
|                     | RATED CURRENT  | 10A   | 8A  | 6.3A        | 4.2A       | 3.2A       |  |
|                     | CURRENT RANGE  | 0 ~ 10A   | 0 ~ 8A  | 0 ~ 6.3A    | 0 ~ 4.2A   | 0 ~ 3.2A   |  |
|                     | RATED POWER  | 120W  | 120W  | 151.2W      | 151.2W     | 153.6W     |  |
|                     | RIPPLE & NOISE (max.) Note.2   | 200mVp-p  | 200mVp-p  | 200mVp-p    | 200mVp-p   | 200mVp-p   |  |
|                     | VOLTAGE TOLERANCE Note.3   | ±5.0%   |   |             |            |            |  |
|                     | LINE REGULATION  | ±1.0%   |   |             |            |            |  |
|                     | LOAD REGULATION  | ±2.0%   |   |             |            |            |  |
|                     | SETUP, RISE TIME Note.6  | LPV-150: 500ms, 50ms / 230VAC 500ms, 50ms / 277VAC; LPVL-150: 1500ms, 50ms / 115VAC                                     |   |             |            |            |  |
| HOLD UP TIME (Typ.) | LPV-150: 18ms/230VAC 20ms/277VAC at full load; LPVL-150: 10ms/115VAC at full load  |   |   |             |            |            |  |
| INPUT               | VOLTAGE RANGE Note.4   | LPV-150: 180 ~ 305VAC 254 ~ 431VDC; LPVL-150: 90~132VAC   |   |             |            |            |  |
|                     | FREQUENCY RANGE  | 47 ~ 63Hz   |   |             |            |            |  |
|                     | EFFICIENCY (Typ.)  | 87%   | 88%   | 89%         | 89%        | 90%        |  |
|                     | AC CURRENT   | LPV-150: 1.7A/230VAC 1.5A/277VAC; LPVL-150: 3.0A/115VAC   |   |             |            |            |  |
|                     | INRUSH CURRENT (Typ.)  | Blank type  | COLD START 60A(twidth=900μs measured at 50% Ipeak) at 230VAC  |             |            |            |  |
|                     |  | L type  | COLD START 75A(twidth=900μs measured at 50% Ipeak) at 115VAC  |             |            |            |  |
|                     | MAX. No. of PSUs on 16A CIRCUIT BREAKER  | Blank type  | 2 units (circuit breaker of type B) / 3 units (circuit breaker of type C) at 230VAC   |             |            |            |  |
| L type              |  | 1 units (circuit breaker of type B) / 2 units (circuit breaker of type C) at 115VAC                                     |   |             |            |            |  |
| LEAKAGE CURRENT     | LPV-150: 0.25mA / 240VAC LPVL-150:0.25mA / 120VAC  |   |   |             |            |            |  |
| PROTECTION          | OVERLOAD   | 110 ~ 150% rated output power<br>Protection type : Hiccup mode, recovers automatically after fault condition is removed |   |             |            |            |  |
|                     | OVER VOLTAGE   | 13.5 ~ 18V  | 17 ~ 25V  | 27 ~ 35V    | 40 ~ 49V   | 52 ~ 63V   |  |
|                     | OVER TEMPERATURE   | Shut down o/p voltage, recovers automatically after temperature goes down   |   |             |            |            |  |
| ENVIRONMENT         | WORKING TEMP.  | -25 ~ +65°C (Refer to "Derating Curve")   |   |             |            |            |  |
|                     | WORKING HUMIDITY   | 20 ~ 90% RH non-condensing  |   |             |            |            |  |
|                     | STORAGE TEMP., HUMIDITY  | -40 ~ +80°C, 10 ~ 95% RH  |   |             |            |            |  |
|                     | TEMP. COEFFICIENT  | ±0.03%/°C (0 ~ 40°C for LPV-150-12,15 and LPVL-150-12,24;0~50°C for LPV-150-24,36,48)                                   |   |             |            |            |  |
|                     | VIBRATION  | 10 ~ 500Hz, 2G 10min./1cycle, period for 60min. each along X, Y, Z axes   |   |             |            |            |  |
| SAFETY & EMC        | SAFETY STANDARDS   | Blank type  | UL8750,CSA C22.2 No 250.13-12,UL879,CSA C22.2 No.207-M89,BIS IS15885(for LPV-150-12,24 only),EAC TP TC 004, IP67;IEC/EN 62368-1 approved. |             |            |            |  |
|                     |  | L type  | UL8750(type"HL"),CSA C22.2 No 250.13-12,UL879,CSA C22.2 No.207-M89,IP67 approved  |             |            |            |  |
|                     | WITHSTAND VOLTAGE  | I/P-O/P:3KVAC   |   |             |            |            |  |
|                     | ISOLATION RESISTANCE   | I/P-O/P:>100M Ohms / 500VDC / 25°C/ 70% RH  |   |             |            |            |  |
|                     | EMC EMISSION   | Blank type  | Compliance to EN55032 (CISPR32) Class B, EN61000-3-2 Class A(≤80% load), EN61000-3-3, EAC TP TC 020                                       |             |            |            |  |
|                     |  | L type  | Compliance to FCC part 15   |             |            |            |  |
| EMC IMMUNITY        | Blank type   | Compliance to EN61000-4-2,3,4,5,6,8,11; EN55024, light industry level, criteria A, EAC TP TC 020                        |   |             |            |            |  |
|                     | L type   | Design refer to IEC61000-4-2,3,4,5,6,8,11; light industry level, criteria A   |   |             |            |            |  |
| OTHERS              | MTBF   | 703Khrs min. MIL-HDBK-217F (25°C)   |   |             |            |            |  |
|                     | DIMENSION  | 191*63*37.5mm (L*W*H)   |   |             |            |            |  |
|                     | PACKING  | LPV-150: 0.74Kg;20pcs/15.8Kg/0.95CUFT; LPVL-150: 0.85Kg;20pcs/17Kg/0.95CUFT   |   |             |            |            |  |
| NOTE                | <ol style="list-style-type: none"> <li>All parameters NOT specially mentioned are measured at 230VAC(115VAC for LPVL) input, rated load and 25°C of ambient temperature.</li> <li>Ripple &amp; noise are measured at 20MHz of bandwidth by using a 12" twisted pair-wire terminated with a 0.1uf &amp; 47uf parallel capacitor.</li> <li>Tolerance : includes set up tolerance, line regulation and load regulation.</li> <li>Derating may be needed under low input voltage. Please check the static characteristics for more details.</li> <li>The power supply is considered as a component that will be operated in combination with final equipment. Since EMC performance will be affected by the complete installation, the final equipment manufacturers must re-qualify EMC Directive on the complete installation again.</li> <li>Length of set up time is measured at first cold start. Turning ON/OFF the power supply may lead to increase of the set up time.</li> <li>Suitable for indoor use or outdoor use without direct sunlight exposure.</li> <li>The ambient temperature derating of 3.5°C/1000m with fanless models and of 5°C/1000m with fan models for operating altitude higher than 2000m(6500ft).</li> <li>For any application note and IP water proof function installation caution, please refer our user manual before using.<br/><a href="https://www.meanwell.com/Upload/PDF/LED_EN.pdf">https://www.meanwell.com/Upload/PDF/LED_EN.pdf</a></li> <li>This product is not intended for LED applications in the EU.(In the EU NPF/LPF/XLG series are recommended.)</li> <li>To fulfill requirements of latest ErP regulation for lighting luminaires, this LED Driver can only be used behind a switch without permanently connected to mains.</li> </ol> |   |   |             |            |            |  |

■ Mechanical Specification

Case No. LPC-150 Unit:mm

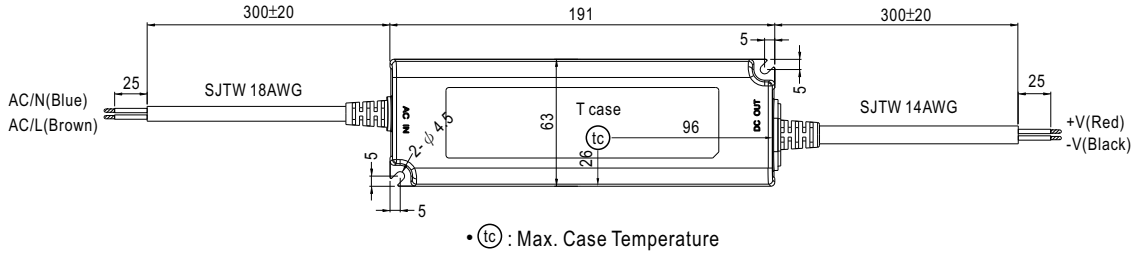


■ Recommend Mounting Direction




■ Block Diagram

PWM fosc : 47KHz

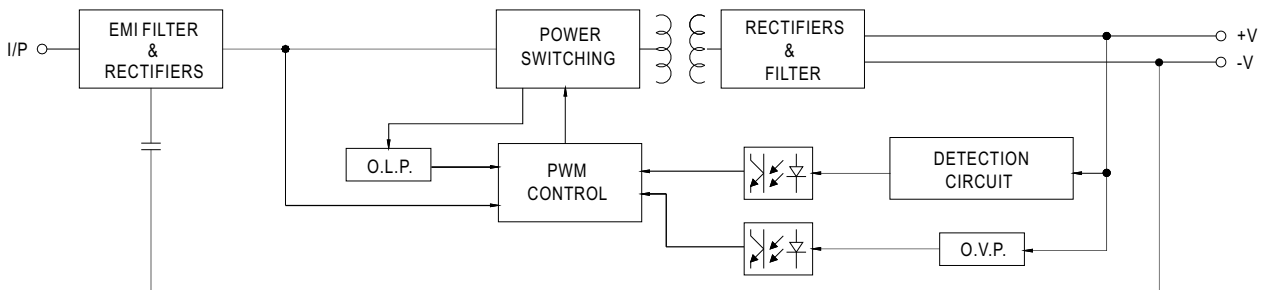

■ Derating Curve

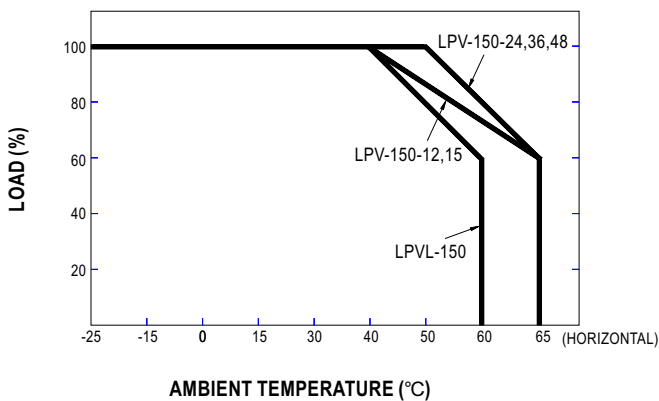

■ Static Characteristics

