


| REV. | DESCRIPTION/ECO NO. | DATE |
|------|---------------------|---------|
| | RELEASED | 3/2/01 |
| A | ADD NOTES | 6/15/01 |
| | | |
| | | |

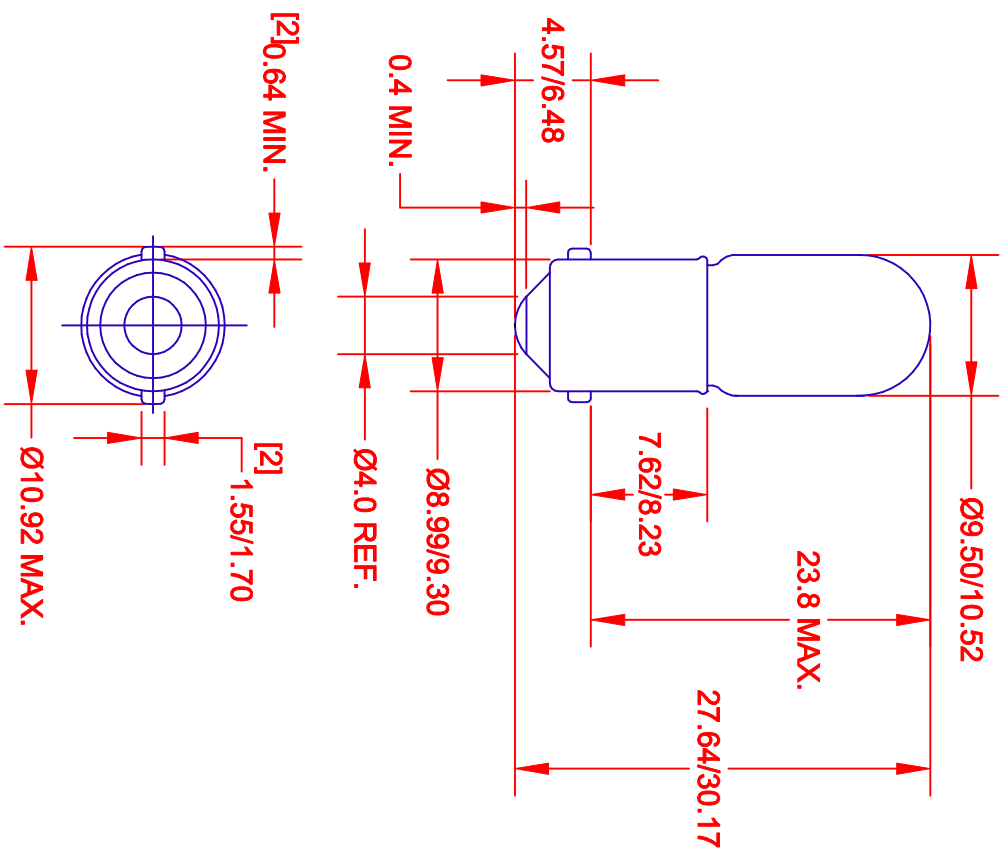

| JKL LAMP NUMBER | VOLTS RATED | AMPS ±10% | MSCP ±25% | LUMENS ±25% | AVERAGE LIFE HRS. | FILAMENT TYPE |
|-----------------|-------------|-----------|-----------|-------------|-------------------|---------------|
| 49 | 2.0 | .060 | .04 | 0.50 | 1,000 | S-2 |
| 1436 | 2.5 | .300 | .30 | 3.77 | 1,000 | C-2R |
| 43 | 2.5 | .500 | .50 | 6.29 | 3,000 | C-2R |
| 1490 | 3.2 | .160 | .20 | 2.51 | 3,000 | C-2R |
| 45 | 3.2 | .350 | .50 | 6.29 | 3,000 | C-2R |
| 1850 | 5.0 | .090 | .25 | 3.14 | 1,500 | C-2R |
| 316 | 6.0 | .700 | 3.40 | 42.74 | 500 | C-2R |
| 755 | 6.3 | .150 | .33 | 4.15 | 20,000 | C-2V |
| 47 | 6.3 | .150 | .52 | 6.54 | 3,000 | C-2R |
| 1866 | 6.3 | .250 | .65 | 8.17 | 10,000 | C-2R |
| 44 | 6.3 | .250 | .90 | 11.31 | 3,000 | C-2R |
| 1888 | 7.0 | .500 | 2.00 | 25.14 | 3,000 | C-2R |
| 1816 | 13.0 | .330 | 3.00 | 37.71 | 1,000 | C-2V |
| 756 | 14.0 | .080 | .31 | 3.90 | 15,000 | C-2F |
| 1815 | 14.0 | .200 | 1.40 | 17.60 | 3,000 | C-2V |
| 1891 | 14.0 | .240 | 2.00 | 25.14 | 500 | C-2F |
| *256 | 14.0 | .270 | 1.60 | 20.11 | 500 | C-2F |
| 1893 | 14.0 | .330 | 2.00 | 25.14 | 7,500 | C-2F |
| 1813 | 14.4 | .100 | .86 | 10.81 | 1,000 | C-2V |
| 1892 | 14.4 | .120 | .75 | 9.43 | 1,000 | C-2F |
| 1818 | 24.0 | .170 | 3.30 | 41.48 | 250 | C-2F |
| 1819 | 28.0 | .040 | .34 | 4.27 | 2,500 | C-2F |
| 1829 | 28.0 | .070 | 1.00 | 12.57 | 1,000 | C-2F |
| 757 | 28.0 | .080 | .62 | 7.79 | 15,000 | C-2F |
| 1820 | 28.0 | .100 | 1.60 | 20.11 | 1,000 | C-2F |
| 1864 | 28.0 | .170 | 3.00 | 37.71 | 1,500 | C-2F |
| 313 | 28.0 | .170 | 3.50 | 44.00 | 500 | C-2F |
| 1873 | 28.0 | .200 | 3.00 | 37.71 | 7,000 | C-2F |
| 1822 | 36.0 | .100 | 2.10 | 26.40 | 1,000 | C-2F |
| 1828 | 37.5 | .050 | .65 | 8.17 | 3,000 | C-2F |
| 1835 | 55.0 | .050 | 1.10 | 13.83 | 5,000 | C-2F |
| RB22 | 130.0 | .027 | .600 | 7.54 | 5,000 | C-5 |

*FLASHER TYPE LAMP

- NOTES:
- FLASHER TYPE LAMPS HAVE A BI-METAL STRIP ADDED TO THE FILAMENT MOUNT TO PROVIDE THE FLASHING. HEAT FROM THE FILAMENT CAUSES THIS STRIP TO BEND AWAY FROM THE LEAD WIRE, BREAKING THE CIRCUIT. AS THE BI-METAL STRIP COOLS IT RETURNS TO ITS ORIGINAL POSITION AGAINST THE LEAD WIRE AND THE LAMP LIGHTS.
 - FLASHER TYPE LAMPS ARE DESIGNED TO RANDOMLY BLINK AT THE APPROXIMATE RATE OF 60-150 FLASHERS PER MINUTE AT A NORMAL ROOM TEMPERATURE. SOME WILL BE OUTSIDE THIS RANGE. AS AMBIENT TEMPERATURE AND/OR INPUT VOLTAGE CHANGES, THE FLASH RATE MAY VARY CONSIDERABLY.

JKL COMPONENTS CORPORATION

| METRIC | | DIMENSIONS ARE IN MILLIMETERS | | TITLE | |
|---|----------|--|-------|---|--------------------------------|
| <p>THIRD ANGLE PROJECTION</p> | | TOLERANCE UNLESS OTHERWISE SPECIFIED 1 PL +/- .02 2 PL +/- .020 ANGLE +/- 0 | | T-3 1/4 MINIATURE SINGLE CONTACT BAYONET | |
| DRAWN BY | APPRD BY | DATE | SCALE | FSC# NO. | DRAWING NO. |
| L. WENGSTROM | QC | 6/15/01 | A | 55335 | BAYONET SINGLE CONTACT T-3 1/4 |
| - CAD DRAWING - MANUAL REVISIONS NOT PERMITTED | | | SCALE | NONE | RELEASED DATE |
| | | | | | 3/2/01 |
| | | | | | REVISION DATE |
| | | | | | 6/15/01 |
| | | | | REV. NO. | 1 OF 1 |
| | | | | A | |