

SAFETY ORGANIZATION(S):

THIS FILTER HAS BEEN FORMALLY RECOGNIZED, CERTIFIED OR APPROVED BY THE LISTED AGENCY. THEREFORE, ALL TEST/REQUIREMENTS SPECIFIED IN THE LATEST REVISION OF THE FOLLOWING AGENCY STANDARDS HAVE BEEN MET:

- UL RECOGNIZED
- CSA CERTIFIED
- VDE APPROVED
- UL 1283
- CSA 22.2, NO.0,0.4,8
- VDE 565-3

OPERATING SPECIFICATIONS:

- LINE VOLTAGE/CURRENT:
- LINE FREQUENCY:
- MAX. CASE RISE θ RATED CURRENT:
- MAX. LEAKAGE CURRENT, EACH LINE TO GROUND
- OPERATING AMBIENT TEMP. RANGE:
- 6 AMP., 120/250 VAC
- 5 AMP./40°C, 250 VAC
- 50-60Hz
- 40°C
- 0.5mA at 120V 60 Hz
- 1.2 mA at 250V 50 Hz
- 10°C TO +40°C θ RATED CURRENT, I_r

IN AN AMBIENT, T_a , HIGHER THAN 40°C, THE MAXIMUM OPERATING CURRENT, I_o , IS AS FOLLOWS:

$$I_o = I_r \sqrt{\frac{85-T_a}{45}}$$

RELIABILITY SPECIFICATIONS:

- STORAGE TEMPERATURE:
- HUMIDITY:
- CURRENT OVERLOAD TEST:
- 40°C TO +85°C
- 21 DAYS θ 40°C 95% RH
- 6 TIMES RATED CURRENT FOR 8 SECONDS

TEST SPECIFICATIONS:

- INDUCTANCE:
- CAPACITANCE: (MEASURED θ 1 KHz, 0.25 VAC MAX., 25°C $\pm$ 1°C)
- LINE TO GROUND:
- LINE TO LINE:
- DISCHARGE RESISTOR:
- LINE/GROUND AND LINE/LINE
- INSULATION RESISTANCE
- (W/O DISCHARGE RESISTOR)
- 1.9 mH NOMINAL
- .013 μ F $\pm$ 20%
- .813 μ F $\pm$ 20%
- 330 K Ω
- 6000 M Ω (MIN) AT 100 VDC
- 20°C AND 50% RH

RECOMMENDED RECEIVING INSPECTION HIPOT:



- LINES TO GROUND:
- LINE TO LINE:
- 2250 VDC FOR 1 MINUTE
- 1450 VDC FOR 1 MINUTE

FILTER APPROVAL:

THE BEST WAY TO SELECT AND QUALIFY A FILTER IS FOR YOUR ENGINEERING TO TEST THE UNIT IN YOUR EQUIPMENT.

50 Ω - 50 Ω (MINIMUM) INSERTION LOSS												
FREQUENCY MHz	.15	.2	.5	1	2	5	10	20	30			
COMMON dB	20	22	30	45	60	65	65	61	54			
DIFF. dB	30	46	65	65	65	60	55	38	38			

This document is proprietary to CORCOM INC. and is not to be reproduced nor used for manufacturing purposes except on CORCOM's order or prior written consent.

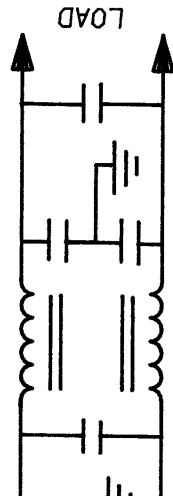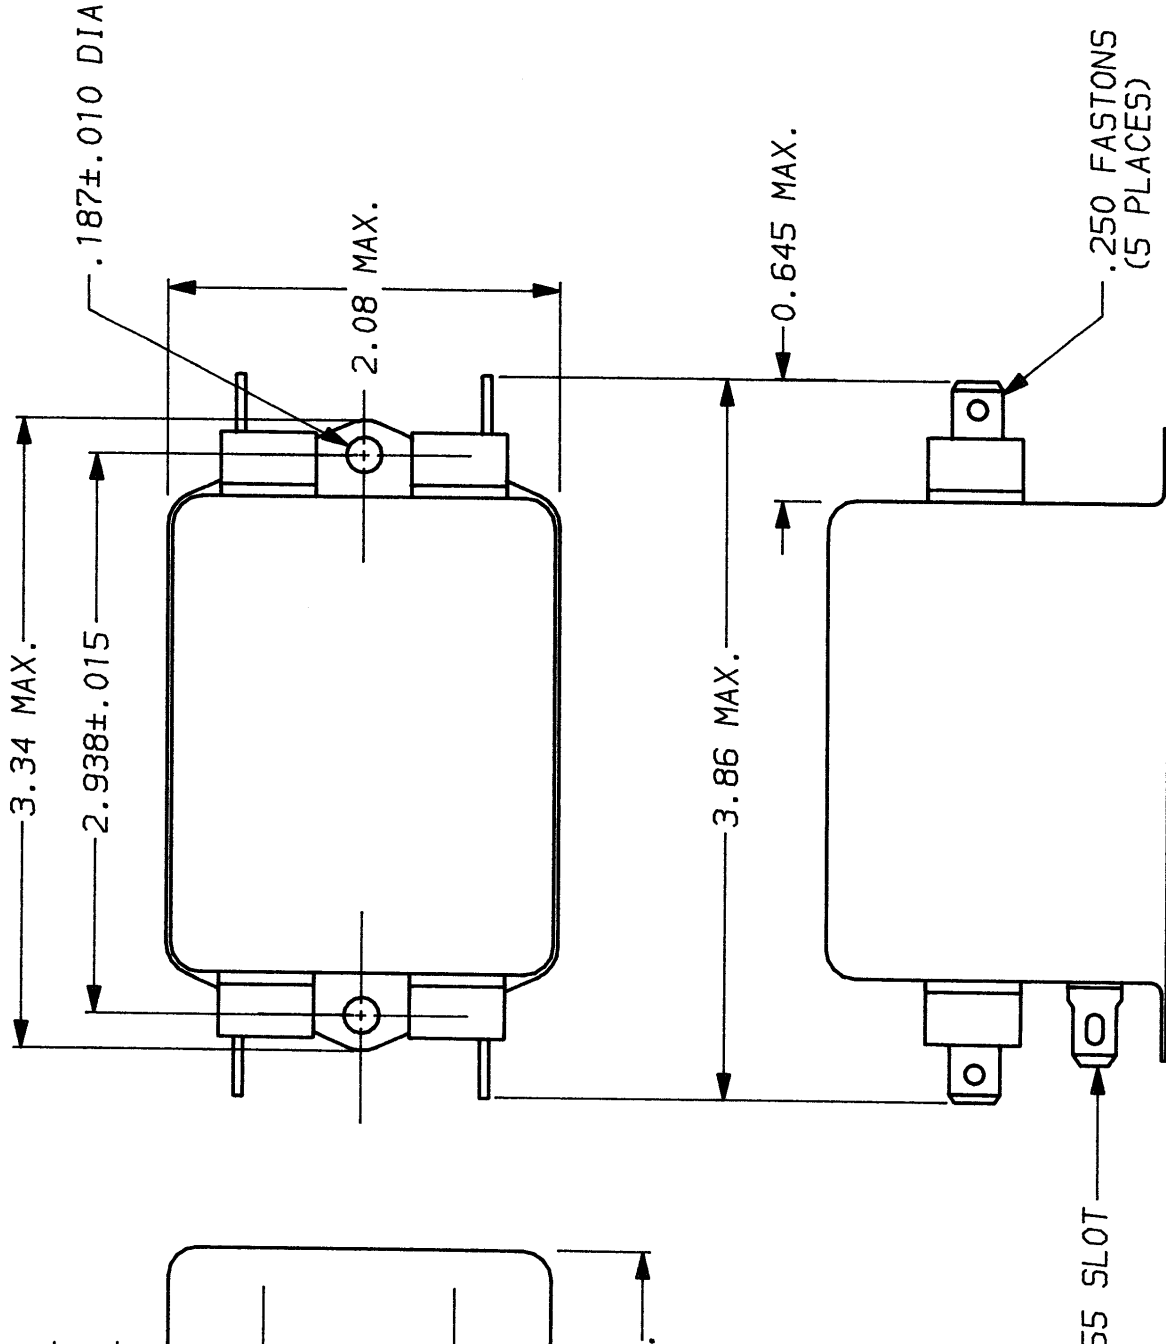



CORCOM

LIBERTYVILLE, IL 60048

POWER LINE FILTER

SCALE NTS

DATE 9-12-89

DRW. BY TDL

ORIGINATOR CW

DRG. NO. 6VW1.07

REV.

TOLERANCE EXCEPT AS NOTED		
DECIMAL: .XXX	.XX	.X ANGLES $\pm$ 1°
ENGLISH: $\pm$.025		
METRIC: $\pm$		
MATERIAL: AS SUPPLIED		
FINISH: AS SUPPLIED		