

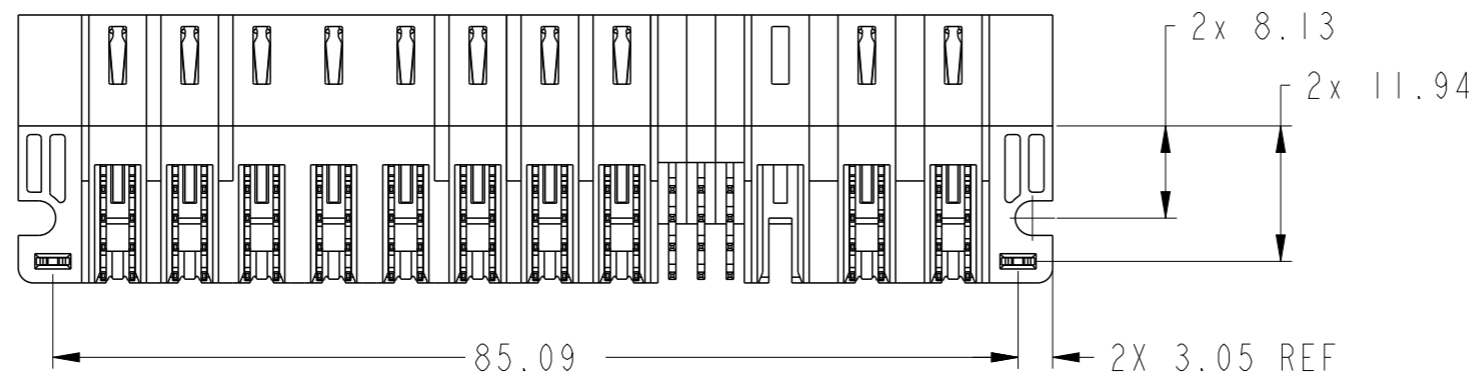
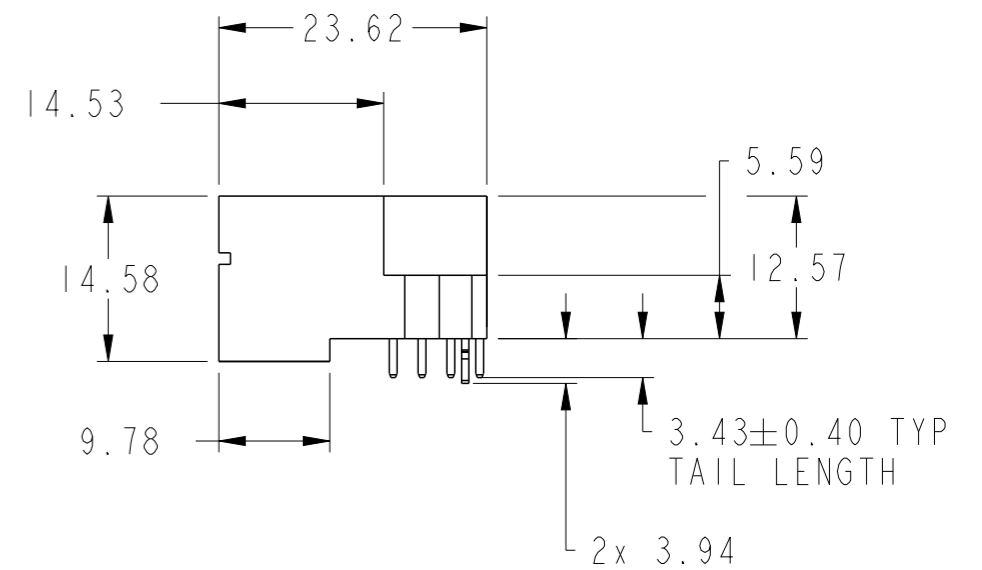
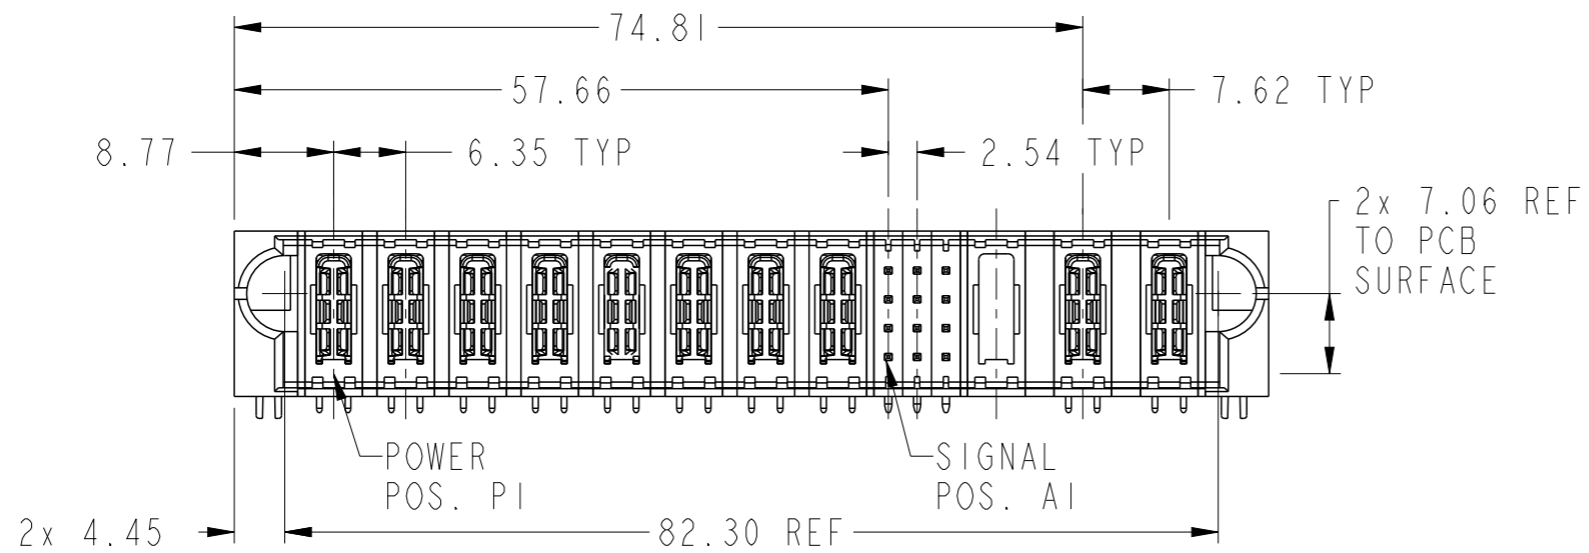


PRODUCT NUMBER SEE SHEET 2

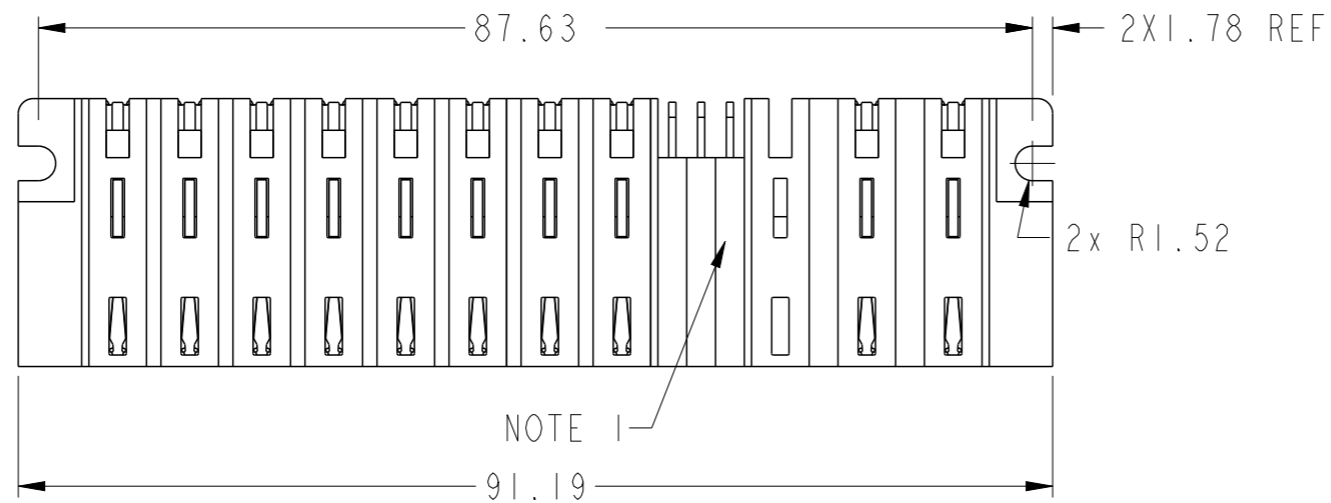

spec ref	*	dr	Rainbow Zhan	2016/11/10	projection	MM	size	A3	scale	3:2	
tolerance std	ISO 406 ISO 1101	eng	Rainbow Zhan	2016/12/02			ecn no	-	rel level		Released
TOLERANCES UNLESS OTHERWISE SPECIFIED		chr	Fancy Zhang	2016/12/02			product family	PwrBlade+			rev
surface	linear	0.X	±0.5	<b>Amphenol FCI</b> www.fci.com	8HP + 12S + 3ACP		dwg no 10106262-B003003	Product - Customer Drw			
		0.XX	±0.25		RA STB PLUG			sheet 1 of 3			
	angular	0°	±2°		cat. no.			Printed: Dec 02, 2016			

PRODUCT NO.	ROWS	HIGH POWER								SIGNAL	HIGH POWER				
		E1	P1	P2	P3	P4	P5	P6	P7	P8	1	2	3	P9	P10
10106262-B003003LF	DCBA	HA	H1	H1	H1	H1	H1	H1	H1	UUU	X		H1	H1	HA

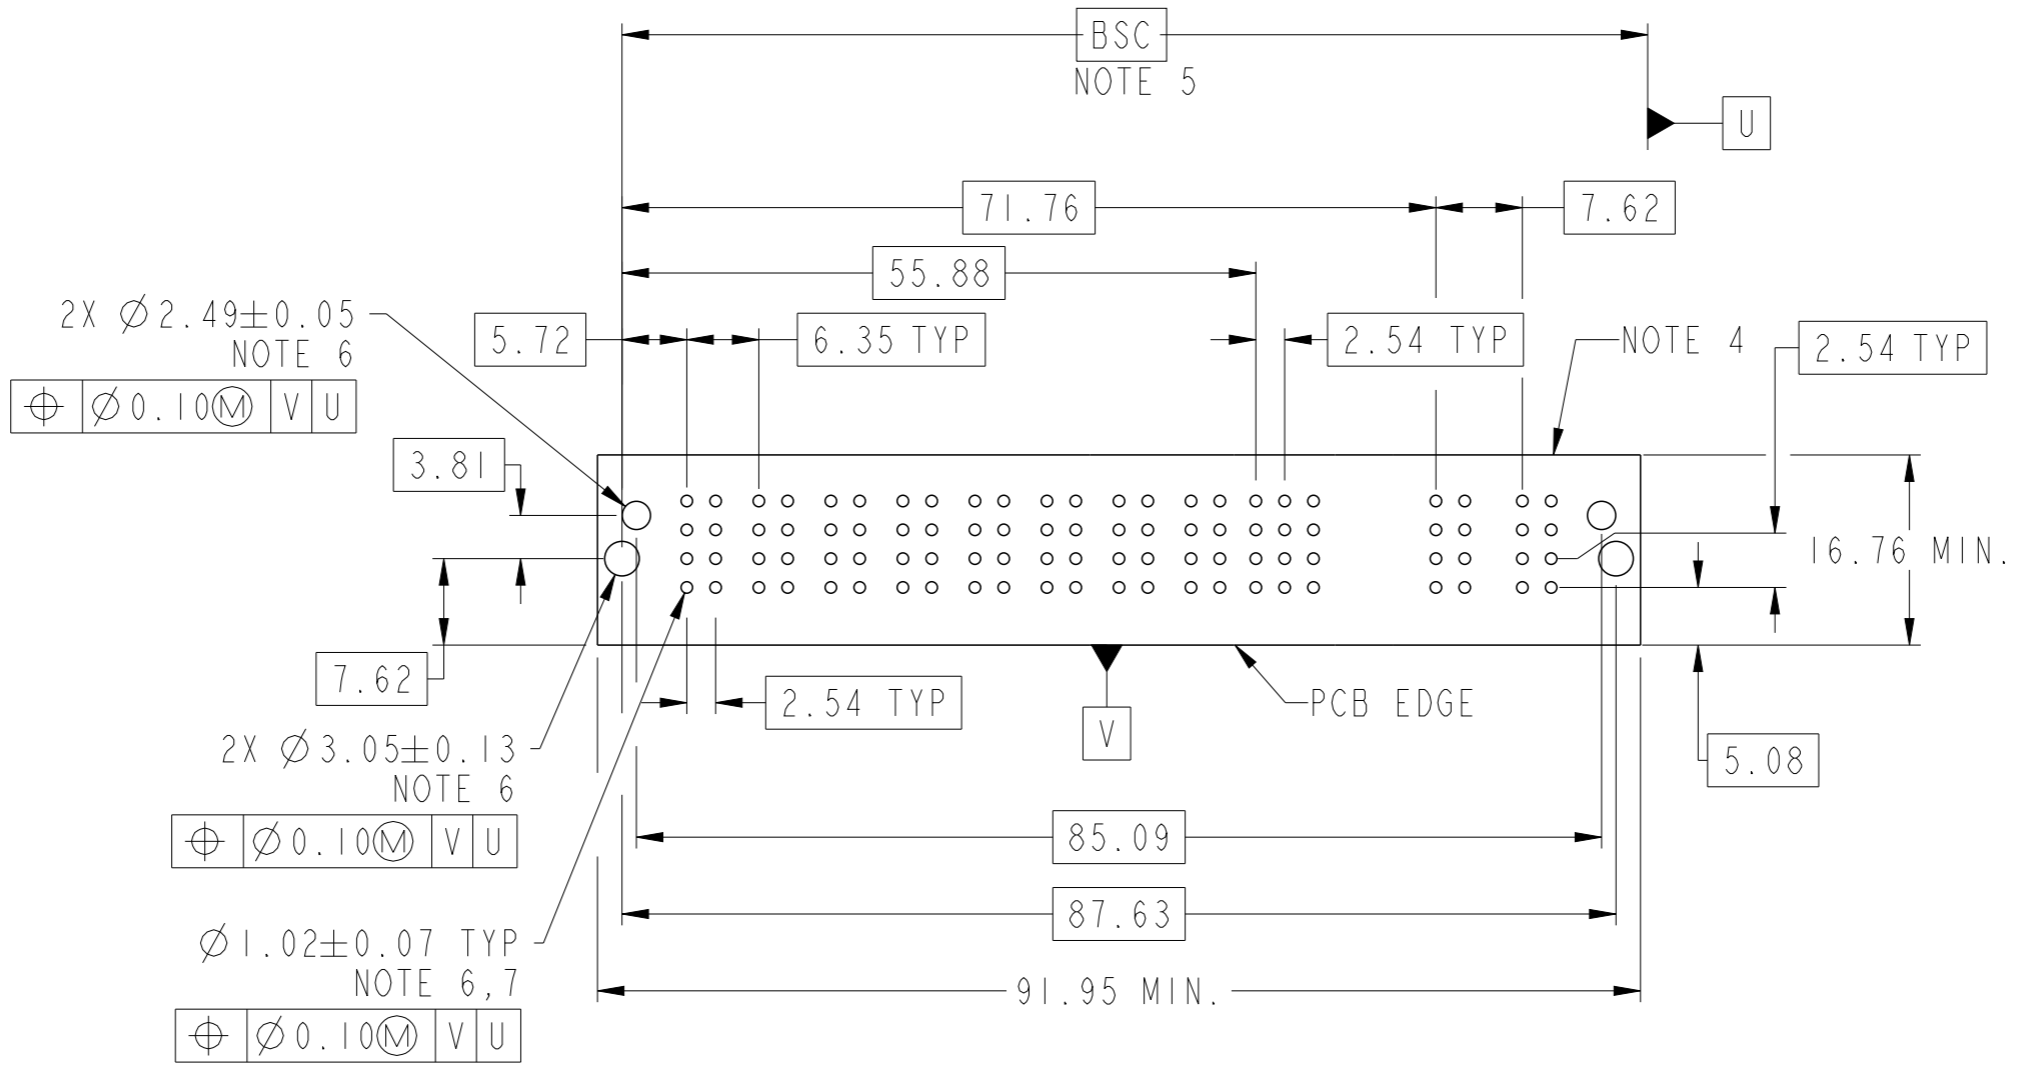

CODE	DESCRIPTION
HI	STD HIGH POWER CONTACT (3.43)
HA	METAL HOLD DOWN
R	STD SIGNAL CONTACT, ROW A (3.43)
S	STD SIGNAL CONTACT, ROW B (3.43)
T	STD SIGNAL CONTACT, ROW C (3.43)
U	STD SIGNAL CONTACT, ROW D (3.43)
X	OMITTED

spec ref	*	dr	Rainbow Zhan	2016/11/10	projection	MM	size	A3	scale	3:2
tolerance std	ISO 406 ISO 1101	eng	Rainbow Zhan	2016/12/02			ecn no	-	rel level	Released
TOLERANCES UNLESS OTHERWISE SPECIFIED		chr	Fancy Zhang	2016/12/02						
surface	linear	appr	Pei-Ming Zheng	2016/12/02	product family	PwrBlade+	8HP + 12S + 3ACP		dwg no	10106262-B003003
	angular			cat. no.	RA STB PLUG		rev	A		
		www.fci.com		Product - Customer Drw		sheet 2 of 3				

Amphenol FCI

© 2016 AFCI

NOTES:

- 1) PRODUCT MARK:  
PART NUMBER AND DATE CODE TO BE MARKED ON THIS SURFACE .  
THE MARK CAN BE OMITTED IF THERE IS NOT ENOUGH SPACE ON THIS SURFACE.
- 2) MATERIALS:  
-HOUSING : HIGH TEMP THERMOPLASTIC WITH GLASS FIBER, UL94V-0, BLACK.  
-POWER CONTACT : HIGH CONDUCTIVITY COPPER ALLOY.  
-SIGNAL CONTACT : COPPER ALLOY.
- 3) PLATING SPECIFICATION : 10116351
- 4) DENOTES CONNECTOR KEEP OUT ZONE.
- 5) DATUM AND BASIC DIMENIONS ARE ESTABLISHED BY CUSTOMER.
- 6) ALL HOLE DIAMETERS ARE FINISHED HOLE SIZES.
- 7) 1.15+/-0.025MM DRILLED HOLE PLATED WITH 0.00762MM MIN SN  
OVER 0.0254-0.0762MM CU PLATING TO ACHIEVE A 1.02+/-0.07MM HOLE.
- 8) THE HOUSING WILL WITHSTAND EXPOSURE TO 265 °C PEAK TEMPERATURE  
FOR 10 SECONDS IN A WAVE SOLDER APPLICATION.
- 9) THIS PRODUCT MEETS EUROPEAN UNION DIRECTIVES AND OTHER COUNTRY  
REGULATIONS AS DESCRIBED IN GS-47-0004.
- 10) PRODUCT SPECIFICATION : GS-12-658.  
APPLICATION SPECIFICATION : GS-20-141.  
PRODUCT PACKAGE SPECIFICATION: GS-14-1502.

Amphenol  
FCi

© 2016 AFCI

spec ref *		dr	Rainbow Zhan	2016/11/10	projection	MM	size	A3	scale	3:2	
tolerance std		eng	Rainbow Zhan	2016/12/02		← →	ecn no		-		
ISO 406 ISO 1101		chr	Fancy Zhang	2016/12/02			rel level		Released		
TOLERANCES UNLESS OTHERWISE SPECIFIED		appr	Pei-Ming Zheng	2016/12/02	product family		PwrBlade+				
surface	linear	0.X	±0.5	<b>Amphenol FCi</b>	8HP + 12S + 3ACP		dwg no	10106262-B003003		rev	A
		0.XX	±0.25								
0.XXX	±0.10										
ISO 1302	angular	0°	±2°	www.fci.com	cat. no.	Product - Customer Drw		sheet 3 of 3			