



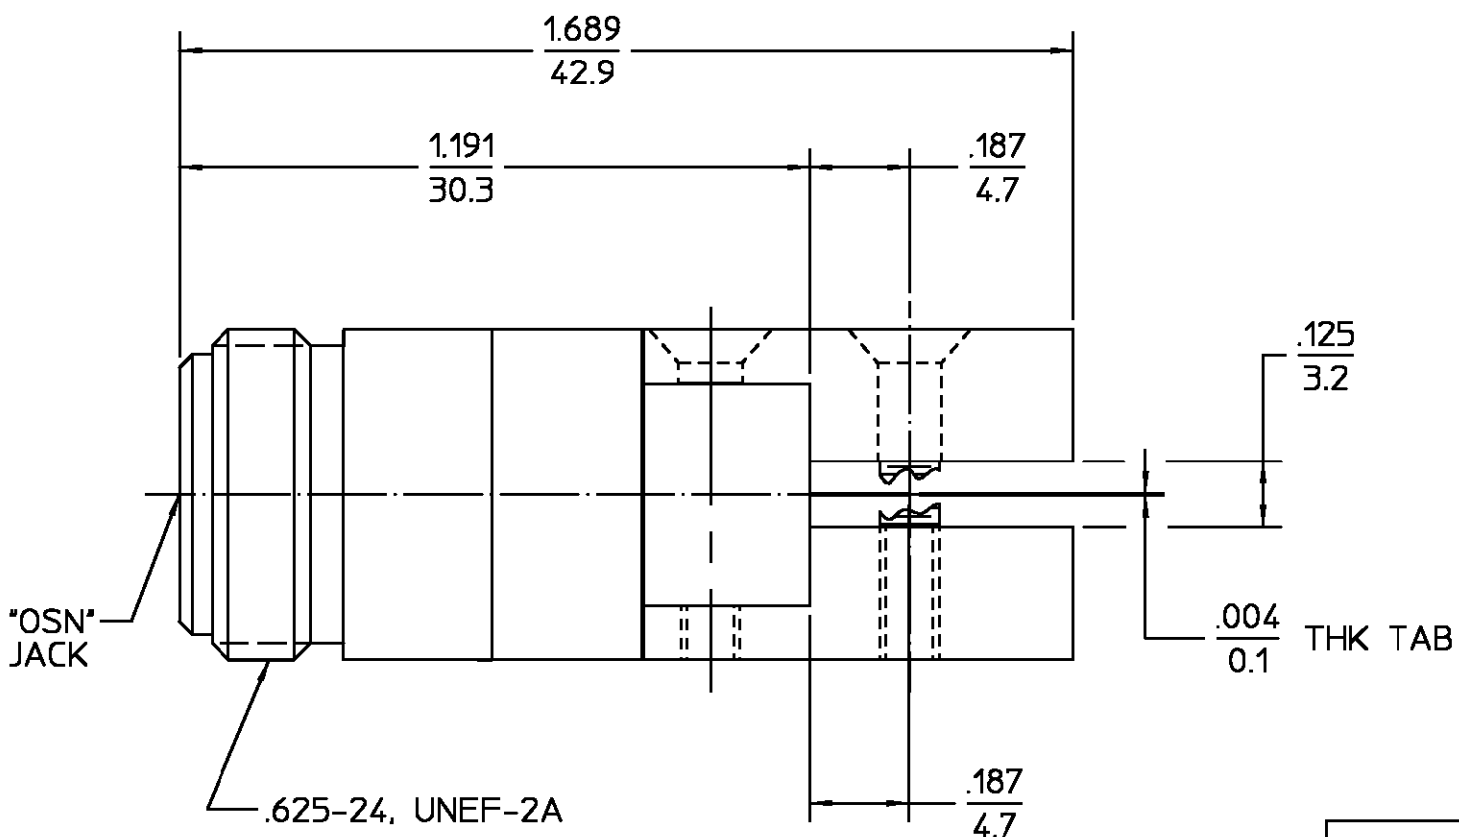

"OSN"
JACK

.625-24, UNEF-2A

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
04 ₁	REVISED	2/18/97	PRB

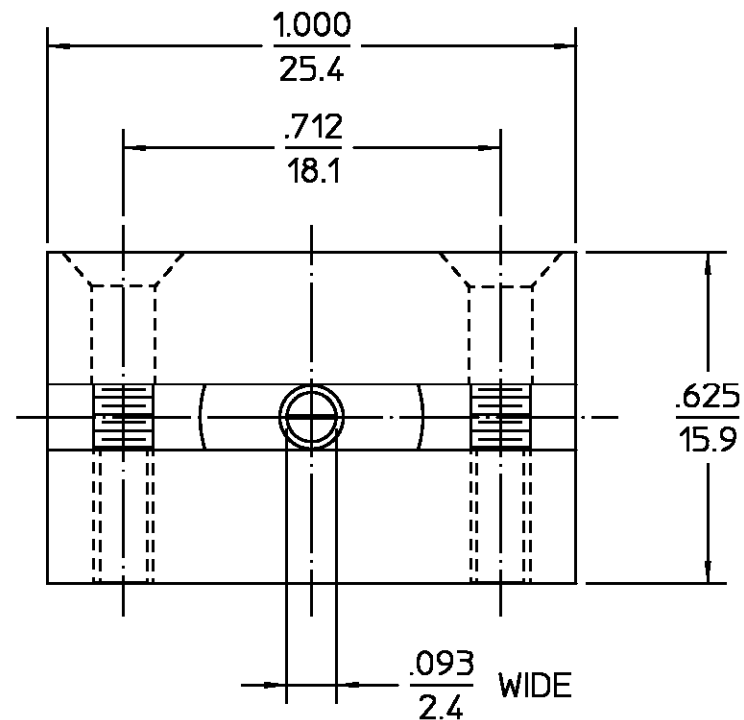

HOUSING	STAINLESS STEEL PER ASTM-A484 AND ASTM-582, TYPE 303	NICKEL PLATE PER QQ-N-290
BASE PLATES SCREWS	BRASS PER ASTM-B-16, HALF HARD	NICKEL PLATE PER QQ-N-290
DIELECTRIC	TFE FLUOROCARBON PER ASTM-D-1457	N/A
CENTER CONTACT	BERYLLIUM COPPER PER ASTM-B-196 OR ASTM-B-197, ALLOY C17300, CONDITION H	GOLD PLATE PER MIL-G-45204
COMPONENT	MATERIAL	FINISH
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES FRAC. DEC. ANGLES ± 1/64 ± .005 ± 1°		
DRAWN BY EJC DATE 1/12/71 CHECKED BY PRB 1/18/71 APP'D BY BWC 1/18/71 AMP Incorporated 140 Fourth Avenue Waltham, MA 02451-7599		
These drawings and specifications are the property of M/A COM Interconnect Div. and shall not be reproduced or copied or used in whole or in part as the basis for the manufacture or sale of item(s) without written permission.		
USE ASSY PROCEDURE NO. A.P. N/A		
TITLE "OSN" STRAIGHT END LAUNCH JACK		
SIZE B	CODE IDENT NO. 26805	3070-1402-10
SCALE 3:1	REV 04 ₁	
		SHEET 1 OF 1

NOTES:

1. CAPTURED CENTER CONTACT
2. DESIGNED FOR 1/8" THICK GROUND PLANE SPACING.

.XXX = in
XX.X = mm (REF)

CUSTOMER DRAWING

AMP PART # 1057332-1
SHEET 1 OF 1 REV A