



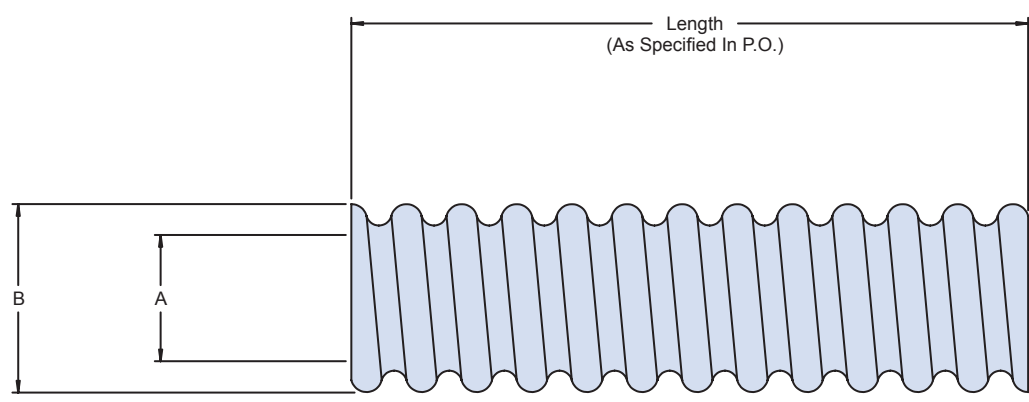

120-108
Standard Diameter
PEEK Helical Convoluted Tubing
IAW DMS 2024 Type II

Standard diameter low-smoke, zero-halogen tubing with outstanding crush resistance

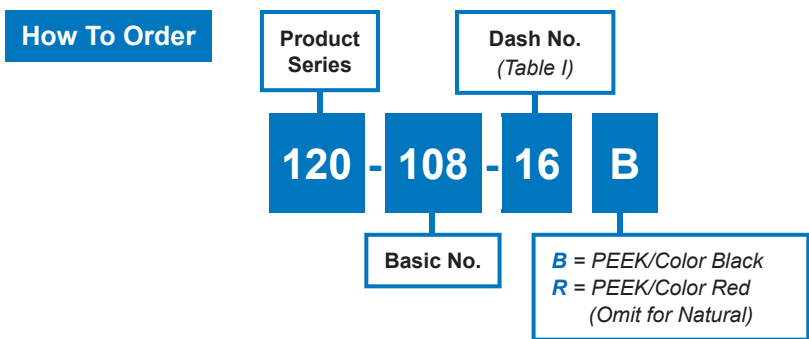

F

| Table I | | | | |
|-------------|---------------------|--------------|--------------|--------------|
| Tubing Size | Fractional Size Ref | A Inside Dia | | B Dia Max |
| | | Min | Nom | |
| 06 | 3/16 | .181 (4.6) | .187 (4.7) | .307 (7.8) |
| 09 | 9/32 | .273 (6.9) | .281 (7.1) | .405 (1.3) |
| 10 | 5/16 | .300 (7.6) | .312 (7.9) | .440 (11.2) |
| 12 | 3/8 | .364 (9.2) | .375 (9.5) | .500 (12.7) |
| 16 | 1/2 | .485 (12.3) | .500 (12.7) | .630 (16.0) |
| 20 | 5/8 | .608 (15.4) | .625 (15.9) | .750 (19.1) |
| 24 | 3/4 | .730 (18.5) | .750 (19.1) | .890 (22.6) |
| 28 | 7/8 | .855 (21.7) | .875 (22.2) | 1.060 (26.9) |
| 32 | 1 | .980 (24.9) | 1.000 (25.4) | 1.195 (3.4) |
| 40 | 1 1/4 | 1.220 (31.0) | 1.250 (31.8) | 1.500 (38.1) |
| 48 | 1 1/2 | 1.480 (37.6) | 1.500 (38.1) | 1.780 (45.2) |
| 56 | 1 3/4 | 1.735 (44.1) | 1.750 (44.5) | 2.020 (51.3) |
| 64 | 2 | 1.980 (5.3) | 2.000 (5.8) | 2.280 (57.9) |

Packaging / Notes

- Packages and Spools identified with manufacturer's name and P/N. Unless otherwise specified, Conduit will be shipped per standard package. Length to be as follows: 3/16 to 3/4 I.D.; 80 ft. min. 1 to 2 I.D.; 40 ft. min.