

## GaAs SP3T Switch DC - 3.5 GHz

Rev. V2

### Features

- Low Insertion Loss: 0.55 dB @ 2.45 GHz
- High P1dB: 35 dBm @ 2.6 V
- 0.5 micron GaAs pHEMT Process
- Lead-Free 2 mm 8-Lead PDFN Package
- Halogen-Free "Green" Mold Compound
- 260°C Reflow Compatible
- Low gate lag for timing sensitive applications
- 1.8 V Operation with 1.8 V on Voltage Pull Up


### Description

M/A-COM's MASW-008955 is a GaAs pHEMT MMIC single pole three throw (SP3T) switch in a lead-free 2 mm 8-lead PDFN package. The MASW-008955 is ideally suited for applications where low control voltage, low insertion loss, high isolation, small size, and low cost are required.

Typical applications are for filter and antenna switching in WLAN or Bluetooth systems that connect separate receive functions to a common antenna. This part can be used in all systems operating up to 3.5 GHz requiring low control voltage.

The MASW-008955 is fabricated using a 0.5 micron gate length GaAs pHEMT process. The process features full passivation for performance and reliability.

### Application Schematic

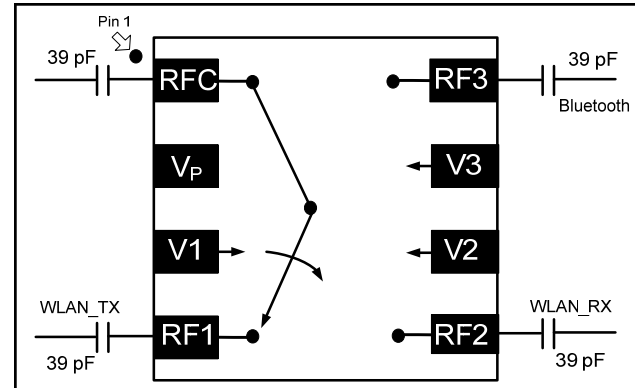

### Pin Configuration

| Pin No. | Function                      | Description              |
|---------|-------------------------------|--------------------------|
| 1       | RFC                           | RF In/Out                |
| 2       | V <sub>p</sub> <sup>3,4</sup> | Optional Voltage Pull Up |
| 3       | V1 <sup>3</sup>               | Control 1                |
| 4       | RF1                           | RF In/Out                |
| 5       | RF2                           | RF In/Out                |
| 6       | V2 <sup>3</sup>               | Control 2                |
| 7       | V3 <sup>3</sup>               | Control 3                |
| 8       | RF3                           | RF In/Out                |

3. Depending on system sensitivity optional DC line bypass capacitors (22 pF) may be used.
4. Improved linearity at low control voltage can be obtained by tying pin 2 to the most positive control voltage. Otherwise, leave pin 2 unconnected.

### Ordering Information<sup>1,2</sup>

| Part Number        | Package           |
|--------------------|-------------------|
| MASW-008955-TR1000 | 1000 piece reel   |
| MASW-008955-TR3000 | 3000 piece reel   |
| MASW-008955-001SMB | Sample Test Board |

1. Reference Application Note M513 for reel size information.
2. All sample boards include 5 loose parts.

### Absolute Maximum Ratings<sup>5,6</sup>

| Parameter                                       | Absolute Maximum |
|-------------------------------------------------|------------------|
| Max Input Power<br>(0.5-3.5 GHz, 2.6 V Control) |                  |
| RFC – RF1                                       | 35 dBm           |
| RFC – RF2                                       | 31 dBm           |
| RFC – RF3                                       | 31 dBm           |
| V <sub>HI</sub> -V <sub>LO</sub>                | 8.5 volts        |
| Operating Temperature                           | -40°C to +85°C   |
| Storage Temperature                             | -65°C to +150°C  |

5. Exceeding any one or combination of these limits may cause permanent damage to this device.
6. M/A-COM does not recommend sustained operation near these survivability limits.

\* Restrictions on Hazardous Substances, European Union Directive 2002/95/EC.

**ADVANCED:** Data Sheets contain information regarding a product M/A-COM Technology Solutions is considering for development. Performance is based on target specifications, simulated results, and/or prototype measurements. Commitment to develop is not guaranteed.

**PRELIMINARY:** Data Sheets contain information regarding a product M/A-COM Technology Solutions has under development. Performance is based on engineering tests. Specifications are typical. Mechanical outline has been fixed. Engineering samples and/or test data may be available. Commitment to produce in volume is not guaranteed.

• **North America** Tel: 800.366.2266 / Fax: 978.366.2266  
 • **Europe** Tel: 44.1908.574.200 / Fax: 44.1908.574.300  
 • **Asia/Pacific** Tel: 81.44.844.8296 / Fax: 81.44.844.8298  
 Visit [www.macontech.com](http://www.macontech.com) for additional data sheets and product information.

M/A-COM Technology Solutions Inc. and its affiliates reserve the right to make changes to the product(s) or information contained herein without notice.

## GaAs SP3T Switch DC - 3.5 GHz

Rev. V2

**Electrical Specifications:  $T_A = 25^\circ\text{C}$ ,  $V_C = 0\text{ V} / 2.6\text{ V}$ ,  $Z_0 = 50\ \Omega$  <sup>7,9</sup>**

| Parameter                   | Test Conditions                                  | Units              | Min. | Typ. | Max. |
|-----------------------------|--------------------------------------------------|--------------------|------|------|------|
| Insertion Loss <sup>8</sup> | 2.45 GHz, RFC - RF1                              | dB                 | —    | 0.55 | 0.85 |
|                             | 2.45 GHz, RFC - RF2                              |                    | —    | 0.6  | 0.85 |
|                             | 2.45 GHz, RFC - RF3                              |                    | —    | 0.6  | 0.85 |
| Isolation                   | 2.45 GHz, RFC - RF1                              | dB                 | 20   | 22   | —    |
|                             | 2.45 GHz, RFC - RF2                              |                    | 20   | 22   | —    |
|                             | 2.45 GHz, RFC - RF3                              |                    | 19   | 20   | —    |
| Return Loss                 | 2.45 GHz                                         | dB                 | —    | 20   | —    |
| IP3                         | Two Tone, +10 dBm/tone, 10 MHz Spacing, 2.45 GHz | dBm                | —    | 54   | —    |
| IP2                         | Two Tone, +10 dBm/tone, 10 MHz Spacing, 2.45 GHz | dBm                | —    | 98   | —    |
| P0.1dB                      | 2.45 GHz (RF1), 2.6 V                            | dBm                | —    | 29   | —    |
|                             | 2.45 GHz (RF2), 2.6 V                            |                    |      | 25   |      |
|                             | 2.45 GHz (RF3), 2.6 V                            |                    |      | 25   |      |
|                             | 2.45 GHz (RF1), 3 V                              |                    |      | 32   |      |
|                             | 2.45 GHz (RF2), 3 V                              |                    |      | 28   |      |
|                             | 2.45 GHz (RF3), 3 V                              |                    |      | 28   |      |
| P1dB                        | 2.45 GHz (RF1), 2.6 V                            | dBm                | —    | 35   | —    |
|                             | 2.45 GHz (RF2), 2.6 V                            |                    |      | 31   |      |
|                             | 2.45 GHz (RF3), 2.6 V                            |                    |      | 31   |      |
|                             | 2.45 GHz (RF1), 3 V                              |                    |      | 36   |      |
|                             | 2.45 GHz (RF2), 3 V                              |                    |      | 34   |      |
|                             | 2.45 GHz (RF3), 3 V                              |                    |      | 34   |      |
| 2nd Harmonic                | 900 MHz, 2.6 V, +10 dBm                          | dBc                | —    | -94  | —    |
|                             | 900 MHz, 2.6 V, +20 dBm                          |                    |      | -75  |      |
|                             | 900 MHz, 3 V, +20 dBm                            |                    |      | -80  |      |
|                             | 2.45 GHz, 2.6 V, +10 dBm                         |                    |      | -86  |      |
|                             | 2.45 GHz, 2.6 V, +20 dBm                         |                    |      | -70  |      |
|                             | 2.45 GHz, 3 V, +20 dBm                           |                    |      | -99  |      |
| 3rd Harmonic                | 900 MHz, 2.6 V, +10 dBm                          | dBc                | —    | -102 | —    |
|                             | 900 MHz, 2.6 V, +20 dBm                          |                    |      | -80  |      |
|                             | 900 MHz, 3 V, +20 dBm                            |                    |      | -100 |      |
|                             | 2.45 GHz, 2.6 V, +10 dBm                         |                    |      | -94  |      |
|                             | 2.45 GHz, 2.6 V, +20 dBm                         |                    |      | -70  |      |
|                             | 2.45 GHz, 3 V, +20 dBm                           |                    |      | -78  |      |
| Trise, Tfall                | 10% to 90% RF                                    | ns                 | —    | 25   | —    |
|                             | 90% to 10% RF                                    |                    |      | 14   |      |
| Ton, Toff                   | 50% control to 90% RF                            | ns                 | —    | 30   | —    |
|                             | 50% control to 10% RF                            |                    |      | 26   |      |
| Gate Lag                    | 50% control to 100% RF                           | $\mu\text{s}$      |      | 4    |      |
| Control Current             | $ V_C  = 2.6\text{V}$                            | $\mu\text{A}$      | —    | 4    | 20   |
| Thermal Resistance          | Junction to case                                 | $^\circ\text{C/W}$ | —    | 96   | —    |

7. For positive control voltage, external DC blocking capacitors are required on all RF ports.

8. Insertion loss can be optimized by varying the DC blocking capacitor value, e.g. 100 pF for 100 - 500 MHz, 39 pF for 2.45 GHz.

9. Specifications apply with no connection to pin 2 ( $V_P$ ).

2

**ADVANCED:** Data Sheets contain information regarding a product M/A-COM Technology Solutions is considering for development. Performance is based on target specifications, simulated results, and/or prototype measurements. Commitment to develop is not guaranteed.

**PRELIMINARY:** Data Sheets contain information regarding a product M/A-COM Technology Solutions has under development. Performance is based on engineering tests. Specifications are typical. Mechanical outline has been fixed. Engineering samples and/or test data may be available. Commitment to produce in volume is not guaranteed.

• **North America** Tel: 800.366.2266 / Fax: 978.366.2266

• **Europe** Tel: 44.1908.574.200 / Fax: 44.1908.574.300

• **Asia/Pacific** Tel: 81.44.844.8296 / Fax: 81.44.844.8298

Visit [www.macontech.com](http://www.macontech.com) for additional data sheets and product information.


M/A-COM Technology Solutions Inc. and its affiliates reserve the right to make changes to the product(s) or information contained herein without notice.

## GaAs SP3T Switch DC - 3.5 GHz


Rev. V2

### Typical Performance Curves


**Insertion Loss**

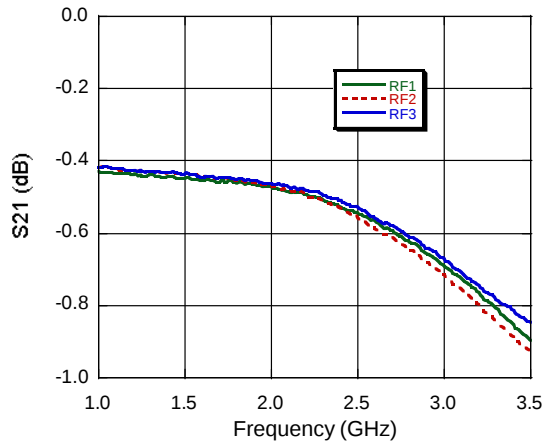

**Isolation**

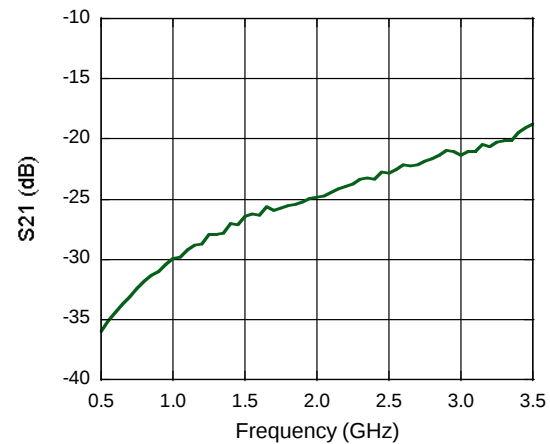

**Return Loss**

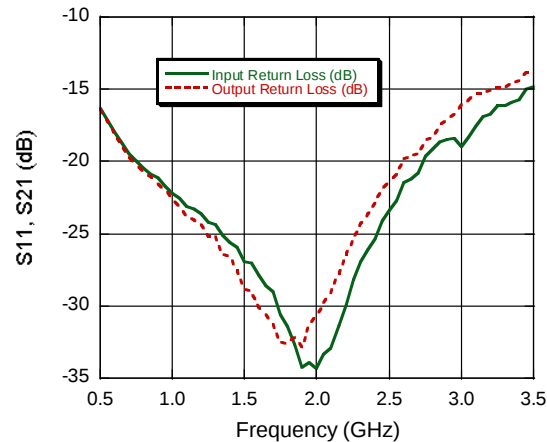

### Handling Procedures

Please observe the following precautions to avoid damage:

### Static Sensitivity

Gallium Arsenide Integrated Circuits are sensitive to electrostatic discharge (ESD) and can be damaged by static electricity. Proper ESD control techniques should be used when handling these devices.

### Truth Table <sup>10,11,12</sup>



| V1 | V2 | V3 | RFC - RF1 | RFC - RF2 | RFC - RF3 |
|----|----|----|-----------|-----------|-----------|
| 1  | 0  | 0  | On        | Off       | Off       |
| 0  | 1  | 0  | Off       | On        | Off       |
| 0  | 0  | 1  | Off       | Off       | On        |

10. 0 = 0 V  $\pm$  0.2 V, 1 = 1.8 V to +5 V, minimum  $V_{HI}-V_{LO}$  = 1.8 V, maximum  $V_{HI}-V_{LO}$  = 8.5 V.

11. For use at low voltage, M/A-COM recommends connecting pin 2 to a voltage equal to the most positive control voltage.

12. Negative control voltage may be used. The '1' in the table would be the most positive (0 V) and the '0' would be the most negative (-3 V for example).

## Rev. V2

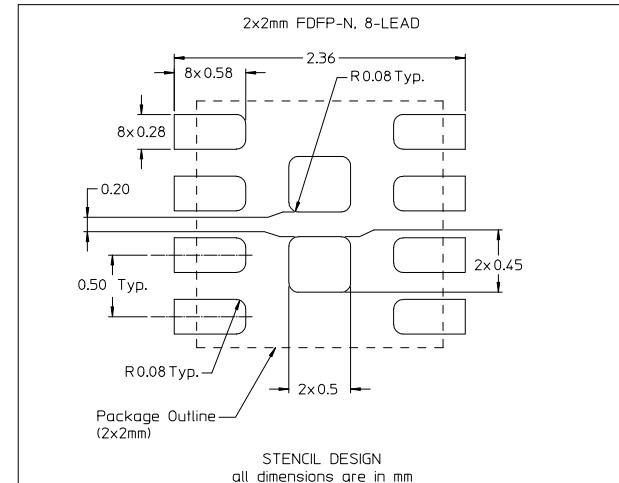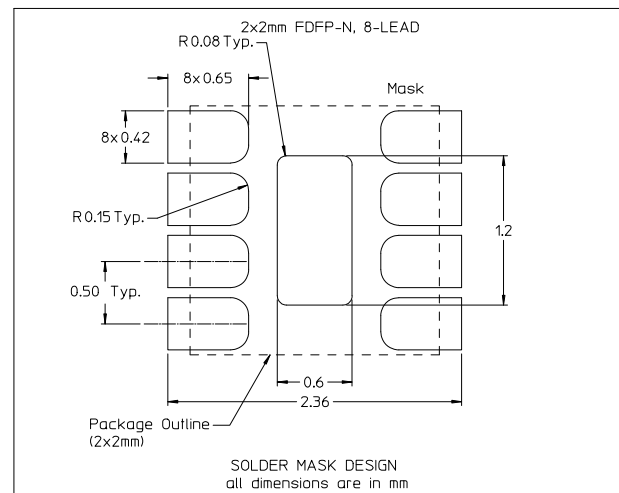

PIN #1 IDENTIFIER

PART NUMBER

DATE CODE

0.787 ± 0.002

0.90 ± 0.10

0.079 ± 0.020

0.036 ± 0.002

0.60 ± 0.05

0.079 ± 0.020

0.018 ± 0.002

0.30 ± 0.05

0.039 ± 0.010

0.197 ± 0.50

SEATING PLANE

0.020 ± 0.000

0.05 ± 0.00

0.0098 ± 0.0028

0.25 ± 0.05

0.07 ± 0.07

0.030 ± 0.0039

0.138 ± 0.0039

0.35 ± 0.10

0.472 ± 0.0020

1.20 ± 0.05

0.236 ± 0.0020

0.60 ± 0.05

MIN. TYP.

EXPOSED PAD

NOTES: 1. REFERENCE JEDEC MO-229, VAR. VCCD-3 FOR ADDITIONAL DIMENSIONAL AND TOLERANCE INFORMATION.  
2. REFERENCE S2083 APPLICATION NOTE FOR PCB FOOTPRINT INFORMATION.  
3. ALL DIMENSIONS SHOWN AS INCHES/MM.

4

• **North America** Tel: 800.366.2266 / Fax: 978.366.2266  
 • **Europe** Tel: 44.1908.574.200 / Fax: 44.1908.574.300  
 • **Asia/Pacific** Tel: 81.44.844.8296 / Fax: 81.44.844.8298  
 Visit [www.macomtech.com](http://www.macomtech.com) for additional data sheets and product information.

*M/A-COM Technology Solutions Inc. and its affiliates reserve the right to make changes to the product(s) or information contained herein without notice.*