
Design Support Tools

Online tools to support device selection and purchasing



......... DC-DC Circuit Calculator

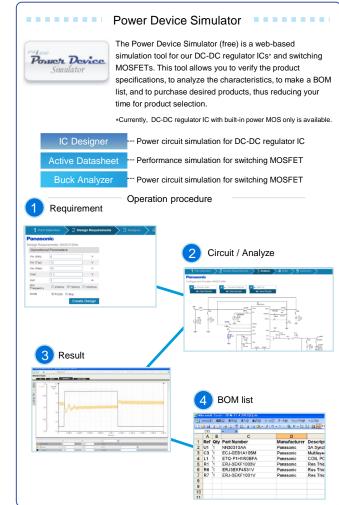

The DC-DC Circuit Calculator (free) is a web-based tool that calculates the recommended peripheral circuit constants for our DC-DC regulator IC* to meet your power system design specifications. Use this calculator together with the "Power Device Simulator" to make the simulation more effective

*Currently, DC-DC regulator IC with built-in power MOS only is available.

Panasonic offers a variety of devices as "Total Power simulations." Please visit the URL below to learn more about coil, capacitor, components for suppressing noise or surge, etc.

http://industrial.panasonic.com/ww/index e.html

Evaluation Board

We have prepared the DC-DC evaluation boards



NN30195A evaluation board NN30195A-EVB-R2

NN30196A evaluation board NN30196A-EVB-R2

NN30320A-EVB-R2 NN30321A evaluation board NN30321A-EVB-R2

NN30312A evaluation board

NN30320A evaluation board

NN30312A-EVB-R2

NN30295A-EVB-0 NN30310AA evaluation board

NN30310AA-EVB-R2

NN30295A evaluation board

Request for your special attention and precautions in using the technical information and semiconductors

- (1) If any of the products or technical information described in this book is to be exported or provided to nonresidents, the laws and regulations of the exporting country, especially, those with regard to security expor control, must be observed. (2) The technical information described in this book is intended only to show the main characteristics and
- application circuit examples of the products. No license is granted in and to any intellectual property right or other right owned by Panasonic Corporation or any other company. Therefore, no responsibility is assumed by our company as to the infringement upon any such right owned by any other company which may arise as a result of the use of technical information described in this book.
- (3) The products described in this book are intended to be used for general applications (such as office equipment, communications equipment, measuring instruments and household appliances), or for specific applications as expressly stated in this book. Consult our sales staff in advance for information on the following applications: Special applications (such as for airplanes, aerospace, automotive equipment, traffic signaling equipment, combustion equipment, life support systems and safety devices) in which exceptional guality and reliability are required, or if the failure or malfunction of the products may directly jeopardize life or harm the human body. It is to be understood that our company shall not be held responsible for any damage incurred as a result of or in connection with your using the products described in this book for any special application, unless our company agrees to your using the products in this book for any specia
- 4) The products and product specifications described in this book are subject to change without notice for modification and/or improvement. At the final stage of your design, purchasing, or use of the products, therefore, ask for the most up-to-date Product Standards in advance to make sure that the latest specifications satisfy your requirements
- (5) When designing your equipment, comply with the range of absolute maximum rating and the guaranteed operating conditions (operating power supply voltage and operating environment etc.). Especially, please be careful not to exceed the range of absolute maximum rating on the transient state, such as power-on, power-off an mode-switching. Otherwise, we will not be liable for any defect which may arise later in your equipment.
- Even when the products are used within the guaranteed values, take into the consideration of incidence of break down and failure mode, possible to occur to semiconductor products. Measures on the systems such as redundant design, arresting the spread of fire or preventing glitch are recommended in order to prevent physical injury, fire, social damages, for example, by using the products.
- b) space injury, inter social damages, for example, by Gang the products.
 (6) Comply with the instructions for use in order to prevent breakdown and characteristics change due to external factors (ESD, EOS, thermal stress and mechanical stress) at the time of handling, mounting or at customer's process. When using products for which damp-proof packing is required, satisfy the conditions, such as shelf life and the elapsed time since first opening the packages. (7) This book may be not reprinted or reproduced whether wholly or partially, without the prior writter permission of our company.

010413

Printed in Japan

Panasonic Semiconductor Solutions Co., Ltd.

1 Kotari-yakemachi, Nagaokakyo City, Kyoto 617-8520, Japan

Tel: 81-75-951-8151

Issued in June, 2014

2.3 06. 2014 Pub. No. A02024BE-3 © Panasonic Corporation 2013-2014

Panasonic

Step down DC-DC Regulator (with built-in power MOS)

June, 2014



www.semicon.panasonic.co.jp/en

ENE FAD Panasonic provides ENELEAD, the "Total solution of power devices," which supports from power system design to purchasing of components, allowing you to select a suitable small, high-efficiency power device, to easily perform a design and evaluation of power systems by using web-based tools, and to purchase peripheral components PD Desig DCDC Design Design Support Tools wer supplie by applicatio Power Device


Power device solution, ENELEAD

Panasonic will continue to offer the power solutions that satisfy our customers along with the "ENELEAD."


www.semicon.panasonic.co.jp/en/applications/power/

or	Panasonic power device simulator global	Click
-		<u></u>

Thank you for your interest in Panasonic Step down DC-DC Regulator. We provide a variety of regulators with wide ranges of input voltage and output current, based on the low power technologies that have been cultivated through the development of customized power supplies for mobile phones. In the next generation, we are going to expand its application for industrial and infrastructure such as server, network and so on with a view to high current not just low power of several hundred mA degree.

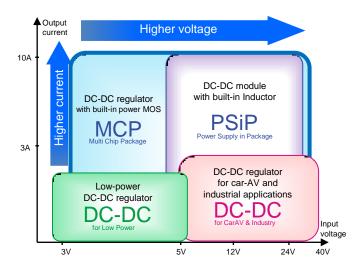

Provides DC-DC solutions with high efficiency, fast response, and small size.




DC-DC Regulator with Built-in Power MOS

DC-DC regulators including both Fast-response control IC with hysteretic control and MOSFET with low ON-resistance in a single package (MCP).


~High efficiency~ Feature 1

Core Technology

(1) Built-in MOSFET with low ON-resistance



Core Technology (2) Skip mode (Set at light load)



Achieves low power consumption and low heat generation.

HQFN24

4.0x4.0mm

(*2)

HQFN24

4.0x4.0mm

0.5/1.0

/2.0 MHz

NN30195A NN30295A NN30297A NN30196A NN30310AA N 4.5 to 5.6V 4.5 to 5.6V 4.5 to 5.6V 6.0 to 30V Input voltage 1 4.0 to 5.6V 4. Input voltage 2 (*1) Absolute maximum 6V 33V 0.6 to 3.5V 0.6 to 3.5V 0.6 to 3.5V 0.75 to 5.5V Output voltage Output current (max) 6A 9A ЗA 6A Control method Hysteretic Hvsteretic Ron (Ω) Hi/Lo 25m/25m 28m/25m 9m/9m 25m/25m 20m/20m 20m/10m 25m/25m 20m/10m I2C control (*2) Yes Yes Synchronous rectification Yes Skip mode (*3)

HQFN40

6.0x6.0mm

0.5/1.0

/2.0 MHz

HQFN24


4.0x4.0mm

(*2)

0.5mm

OCP, OVD, SCP, UVLO, TSD

0.5 to 2.0 MHz 0.5 to 2.0 MHz

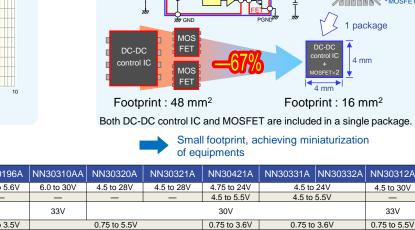

Feature 2

Core Technology

Load current

Hysteretic control method

	Load transiv Vin = 5.0 V, Vo Cout: 44 µF L: 1.0 µH			10 µs/div 10 µs/div		10 µsdiv 10 µsdiv (10 µsd A CM 3 1400 (10 0 µsd A CM 3 1400 (10 0 µsd A CM 3 1400) (10 0 µsd A CM 3 1400)			
Reduces the overshoot/undershoot due to load current transient to ±10 mVpp.									
Ensures stable operation of equipments.									
	Feature 3	3	~Small size	:~					
Core Technology MCP (Multi-Chip Package)									
	Circuit diagram								
DC-DC control IC FET MOS FET MOS									
Footprint : 48 mm ² Footprint : 16 mm ²									
Both DC-DC control IC and MOSFET are included in a single package. Small footprint, achieving miniaturization of equipments									
Ν	N30320A	NN30321A	NN30421A	NN30331A	NN30332A	NN30312A			
	4.5 to 28V	4.5 to 28V	4.75 to 24V		0 24V	4.5 to 30V			
<u>4.5 to 5.5V</u> <u>4.5 to 5.5V</u> 30V									

8A

Yes Ο

0.5mm

OCP, OVD, SCP, UVLO, TSD

HQFN24

0.22/0.41

/0.58 MHz

4.0x 4.0mm

HQFN24

4.0x4.0mm

0.21/0.43

/0.65 MHz

20m/6m

HQFN24

4.0x4.0mm

0.43/0.63

MHz

~Fast response~

10 µA⇒1 A

1 A⇒10 µA

10A

20m/6m

HQFN24

4.0x4.0mm

0.43/0.63

MHz

9m/9m

HQFN40

6.0x6.0mm

0.25/0.75

/1.25 MHz

Product life cycle stage

Selectable frequency

Type

Size

Pin-pitch

Line-up

rating

Package

Function

(*1) Ultra-high efficiency at light load achieved by a 5-V input voltage (+2) For NN30295 & NN30297, the I2C interface can be used to select from among seven frequency values and change the output voltage (*3) Skip mode: High efficiency mode at light load

HQFN24

4.0x4.0mm

0.25/0.75

/1.25 MHz

HQFN24

4.0x4.0mm

0.21/0.43

/0.65 MHz

MP

Wide product lineup for various applications

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Panasonic: NN30320A-EVB-R2