


LEAD-FREE P/N	DIM A	DIM B	DIM C	DIM D
91315-X03LF	(11.9)	17.9	9.5	6.4
91315-X04LF	(12.9)	18.6	10.2	7.1

PLATING CODE X	CONTACT AREA PLATING
1	1.3um Au min.

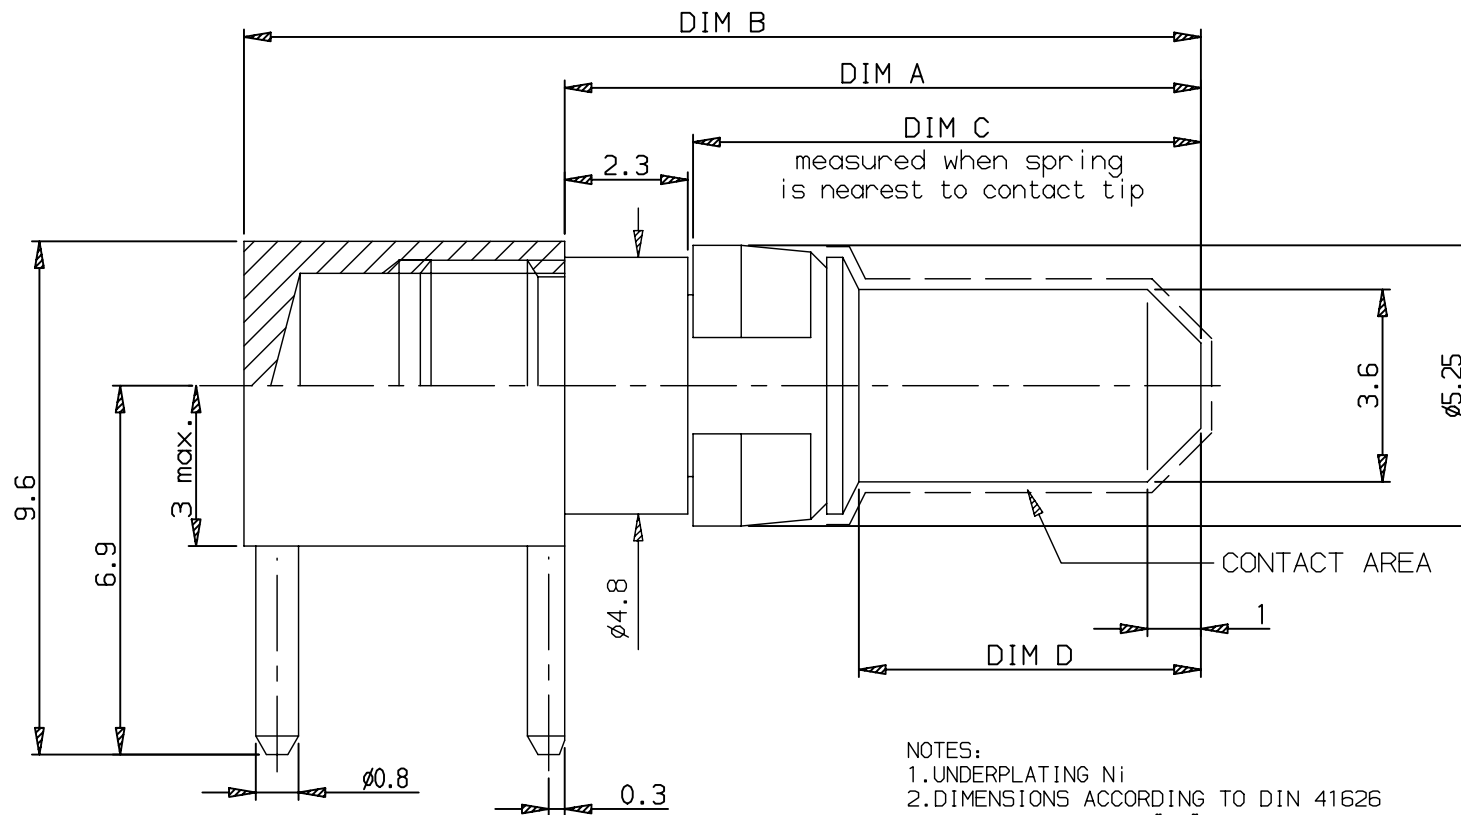

NOTES:

- 1.UNDERPLATING NI
- 2.DIMENSIONS ACCORDING TO DIN 41626
- 3 THIS PRODUCT WITH "LF" SUFFIX MEETS EUROPEAN UNION DIRECTIVES AND OTHER COUNTRY REGULATIONS AS DESCRIBED IN GS -22-008.
4. THE PRODUCT WILL WITHSTAND EXPOSURE TO 260 DEGREE PEAK TEMPERATURE FOR 20 SECONDS IN A WAVE SOLDER APPLICATION WITH A 1.6mm MINIMUM THICK CIRCUIT BOARD.
- 5.PACKAGING SPEC: SEE GS-14-920

European Views

rev	ecn no	dr	date
F	LS06-0022	LGO	06/03/06
G	LS08-0057	LGO	2008/02/18
-	-	-	-
-	-	-	-
-	-	-	-
-	-	-	-

www.fciconnect.com			surface ISO 1302		☒	tolerance std ISO 406 ISO 1101		projection 		mm 	
TOLERANCES UNLESS OTHERWISE SPECIFIED											
Dr	Visschers	91/10/21	ANGULAR	LINEAR	0.X	±0.1	size A3	Scale 10:1			
Eng	W.V.Alst	01/03/27			0.XX	±0.1					
Chr	M.Loman	91/10/21			0.XXX	±0.1					
Appr	H.Cooymans	91/10/21	Product family		METRAL			Spec ref -		ECN LS08-0057	
			POWER INSERT					dwg no 91315		Rev. 6	
			R.A.MALE DIN							CUSTOMER sheet 1 of 1	
			catalog no -								