

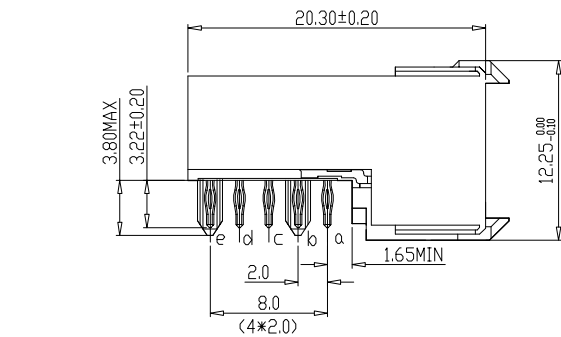
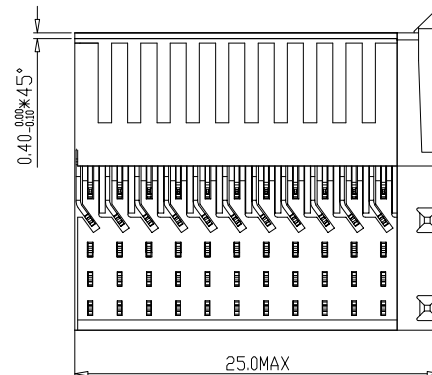


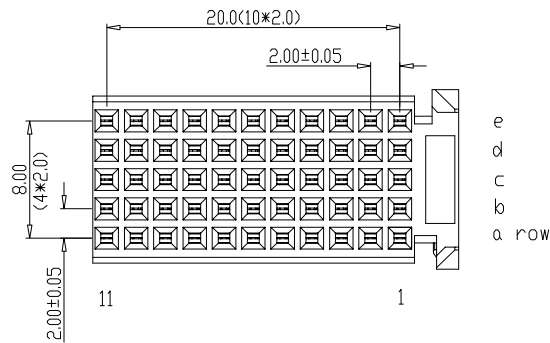

LAY-OUT
P.C.B.- HOLE

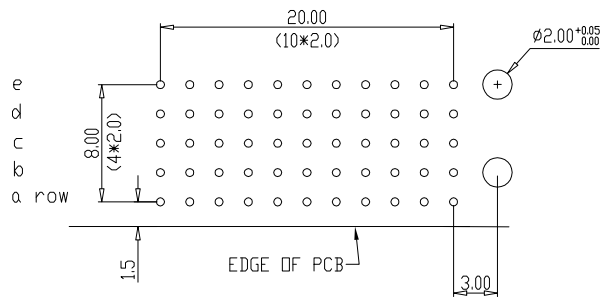

PERFORMANCE CHARACTERISTICS

CURRENT RATING 1.5A AT 20°C (FULLY LOADED)
 1 A AT 70°C (FULLY LOADED)

RATED VOLTAGE : 500 V AC (CONT /CONT)


OPERATING TEMPERATURE : -55°C TO 125°C

CONTACT RESISTANCE 20 mΩ MAX

INSERTION FORCE : 0.75N MAX/CONT

EXTRACTION FORCE : 0.15N MIN/CONT

INSULATION RESISTANCE : $10^4 \text{ M}\Omega \text{ MIN}$



- NOTES
1. 
PERFORMANCE LEVEL INDICATOR
(REF DWG NO.BSC 201844.003)
 2. THIS PRODUCT IS CSA APPROVED.
THIS PRODUCT IS UL RECOGNIZED.
 3. FOR RECOMMENDED PTH DIMENSIONS REFER DRAWING :
BS.A201572.001
 4. THIS PRODUCT (LF) MEETS EUROPEAN UNION DIRECTIVES AND
OTHER COUNTRY REGULATIONS AS DESCRIBED IN GS-22-008

rev	ecn no	dr	date
A	CONVERSION REVISION 06	KN	14-09-01
B	DG05-0278	Kason	02-08-05
C	DG07-0362	Kason	05-09-07
D	DG08-0159	NZ	06-12-08
E	DG10-0110	NZ	05-30-10

Material			Spec ref										
Mat code			✓ tolerance 1DEC ± 0.2 1DEC 2DEC ± 0.1 2DEC ANGLES ± 1° HOKEN			projection		MM					
Heatreat													
Plating/Finish													
Dr		W.Panis		10-01-95		size		A4		Scale		2.000	
Eng						Product family		MILLIPACS					
Chr						Model Name				ECN			
Appr						Model Revision				REL Level			
		title		MPACS 5+2R RA RCP CONN TYPE CR		dwg no		BSC201418023		Rev.		E	
Pro/E file		catalog no		HM2R20PA5100----		CUSTOMER DRAWING				sheet 1 of 1			