

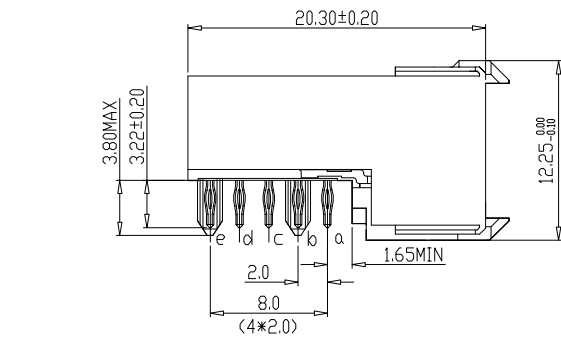
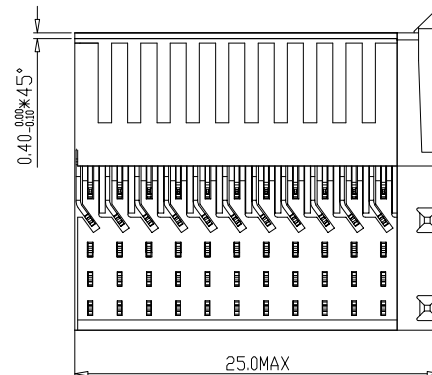


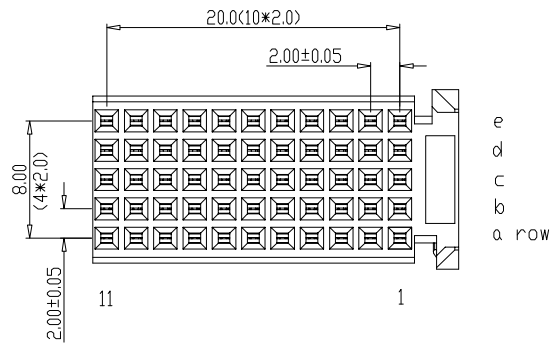

LAY-OUT
P.C.B.- HOLE

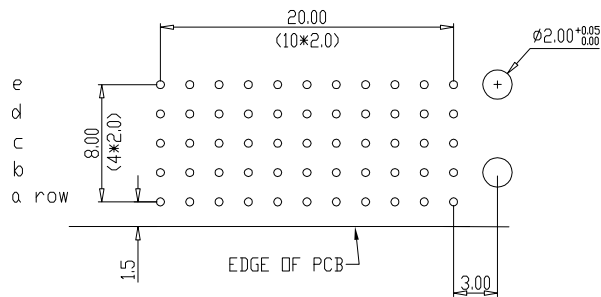

PERFORMANCE CHARACTERISTICS

CURRENT RATING 1.5A AT 20°C (FULLY LOADED)
 1 A AT 70°C (FULLY LOADED)

RATED VOLTAGE : 500 V AC (CONT /CONT)


OPERATING TEMPERATURE : -55°C TO 125°C

CONTACT RESISTANCE 20 mΩ MAX

INSERTION FORCE : 0.75N MAX/CONT

EXTRACTION FORCE : 0.15N MIN/CONT

INSULATION RESISTANCE : 10^4 MΩ MIN



- NOTES**
1. 
PERFORMANCE LEVEL INDICATOR
(REF DWG NO.BSC 201844.003)
 2. THIS PRODUCT IS CSA APPROVED.
THIS PRODUCT IS UL RECOGNIZED.
 3. FOR RECOMMENDED PTH DIMENSIONS REFER DRAWING :
BS.A201572.001
 4. THIS PRODUCT (LF) MEETS EUROPEAN UNION DIRECTIVES AND
OTHER COUNTRY REGULATIONS AS DESCRIBED IN GS-22-008

rev	ecn no	dr	date
A	CONVERSION REVISION 06	KN	14-09-01
B	DG05-0278	Kason	02-08-05
C	DG07-0362	Kason	05-09-07
D	DG08-0159	NZ	06-12-08
E	DG10-0110	NZ	05-30-10

Material			Spec ref					
Mat code			 tolerance 1DEC ± 0.2 1DEC 2DEC ± 0.1 2DEC ANGLES ± 1° HDEKEN projection  MM 					
Heattreat								
Plating/Finish								
Dr	W.Panis	10-01-95				size	A4	Scale
Eng			Product family			MILLIPACS		2.000
Chr			Model Name				ECN	
Appr			Model Revision				REL Level	
		title MPACS 5+2R RA RCP CONN TYPE CR				drawing no BSC201418023		Rev. E
Pro/E file		catalog no		HM2R20PA5100----		CUSTOMER DRAWING		sheet 1 of 1