



0467



0467-0-15-XX-21-XX-04-0
 Press-fit in 0,94 mounting hole


0552



0552-X-15-XX-X1-XX-10-0
 Solder mount in 1,02 min. mounting hole
 Also available on 16mm wide carrier
 tape: 1,500 parts per 330mm reel.
 Order as: 0552-X-57-XX-X1-XX-10-0


Basic Part Number	Length L	Depth N
0552-1	3,45	3,05
0552-2	4,32	3,81

5522

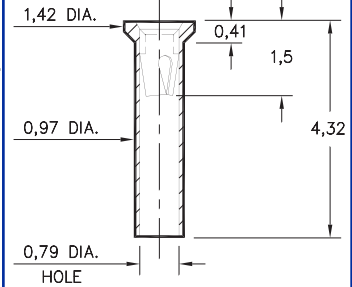


5522-0-15-XX-09-XX-10-0
 Solder mount in 1,02 min. mounting hole

0569




0569-0-15-XX-X1-XX-10-0
 Solder mount in 1,02 min mounting hole

6023




6023-0-15-XX-21-XX-10-0
 Solder mount in 1,02 min mounting hole

6214




6214-0-15-XX-21-XX-10-0
 Solder mount in 1,02 min mounting hole

2086

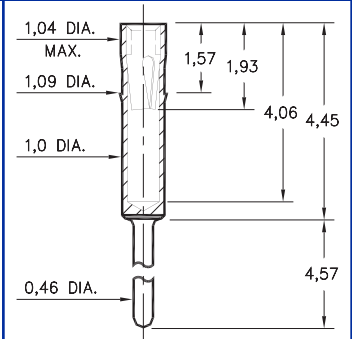

2086-0-15-XX-21-XX-04-0
 Press-fit in 1,02 mounting hole


0461



0461-X-15-XX-X1-XX-04-0
 Solder mount in 0,51 min. mounting hole

Basic Part Number	Length A
0461-0	10,16
0461-1	6,99
0461-2	4,57
0461-3	3,18
0461-4	1,52
0461-5	11,18

8579



8579-X-15-XX-X1-XX-10-0
 Solder mount in 1,02 min. mounting hole
 Also available on 24mm wide carrier
 tape: 1,200 parts per 330mm reel.
 Order as: 8579-0-57-XX-X1-XX-10-0

Basic Part Number	Length L
8579-0	5,94
8579-1	7,49

SPECIFICATIONS

SHELL MATERIAL:
 Brass Alloy 360, 1/2 Hard

CONTACT MATERIAL:
 Beryllium Copper Alloy 172, HT

DIMENSION IN INCHES
TOLERANCES ON:
 LENGTHS: $\pm 0,13$
 DIAMETERS: $\pm 0,05$
 ANGLES: $\pm 2^\circ$

ORDER CODE: XXXX - X - 15 - XX - XX - XX - 10 - 0

BASIC PART #

SPECIFY SHELL FINISH:

- 01 5,08 μ m TIN/LEAD OVER NICKEL
- ◇ 80 5,08 μ m TIN OVER NICKEL (RoHS)
- ◇ 15 0,25 μ m GOLD OVER NICKEL (RoHS)

SPECIFY CONTACT FINISH:

- 02 2,54 μ m TIN/LEAD OVER NICKEL
- ◇ 84 2,54 μ m TIN OVER NICKEL (RoHS)
- ◇ 27 0,76 μ m GOLD OVER NICKEL (RoHS)



SELECT CONTACT

#09, #11 or #21 CONTACT (DATA ON PAGES 216 & 217)