
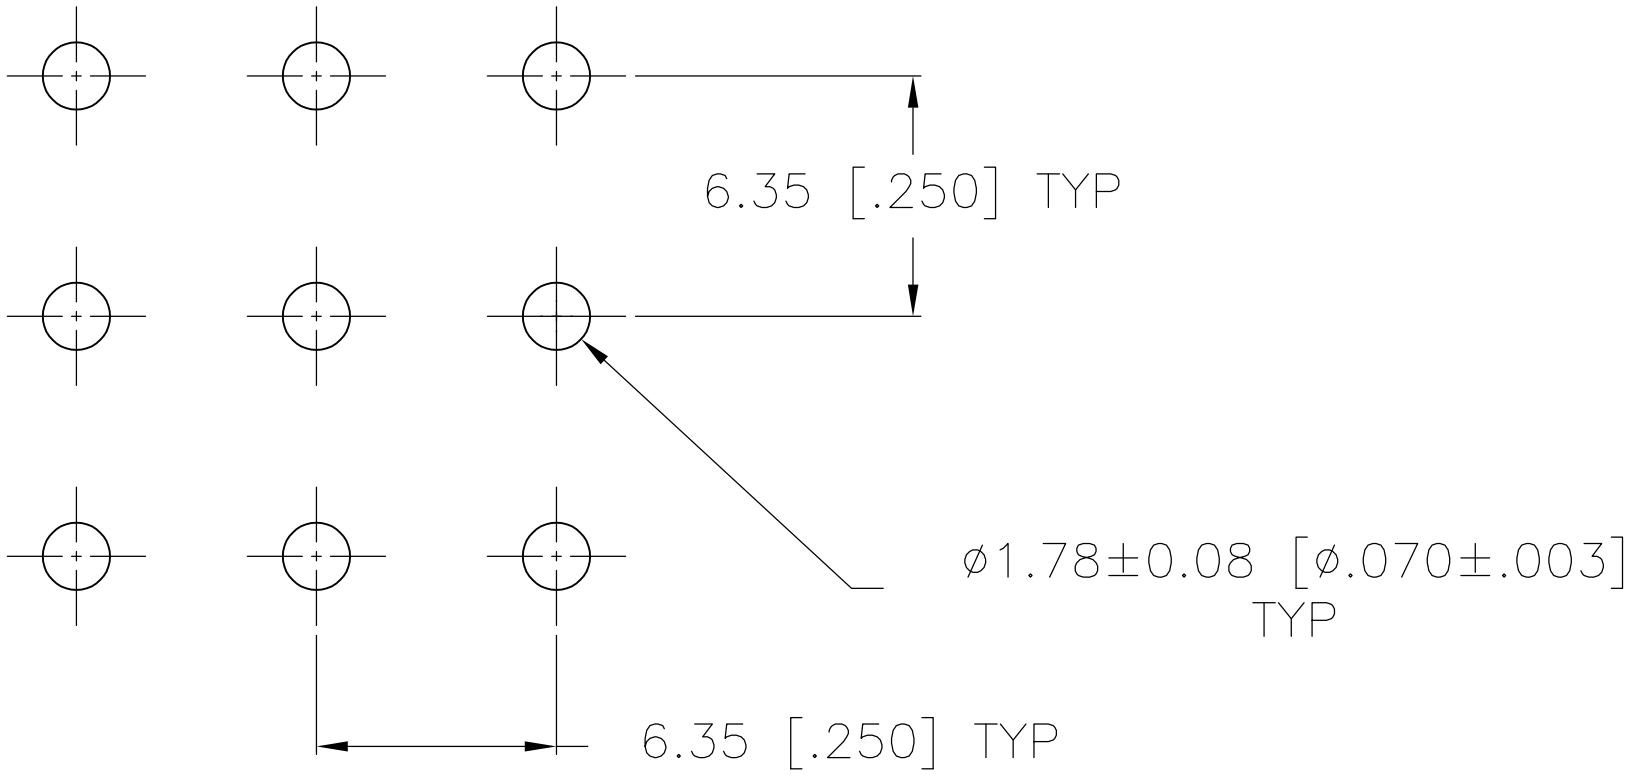
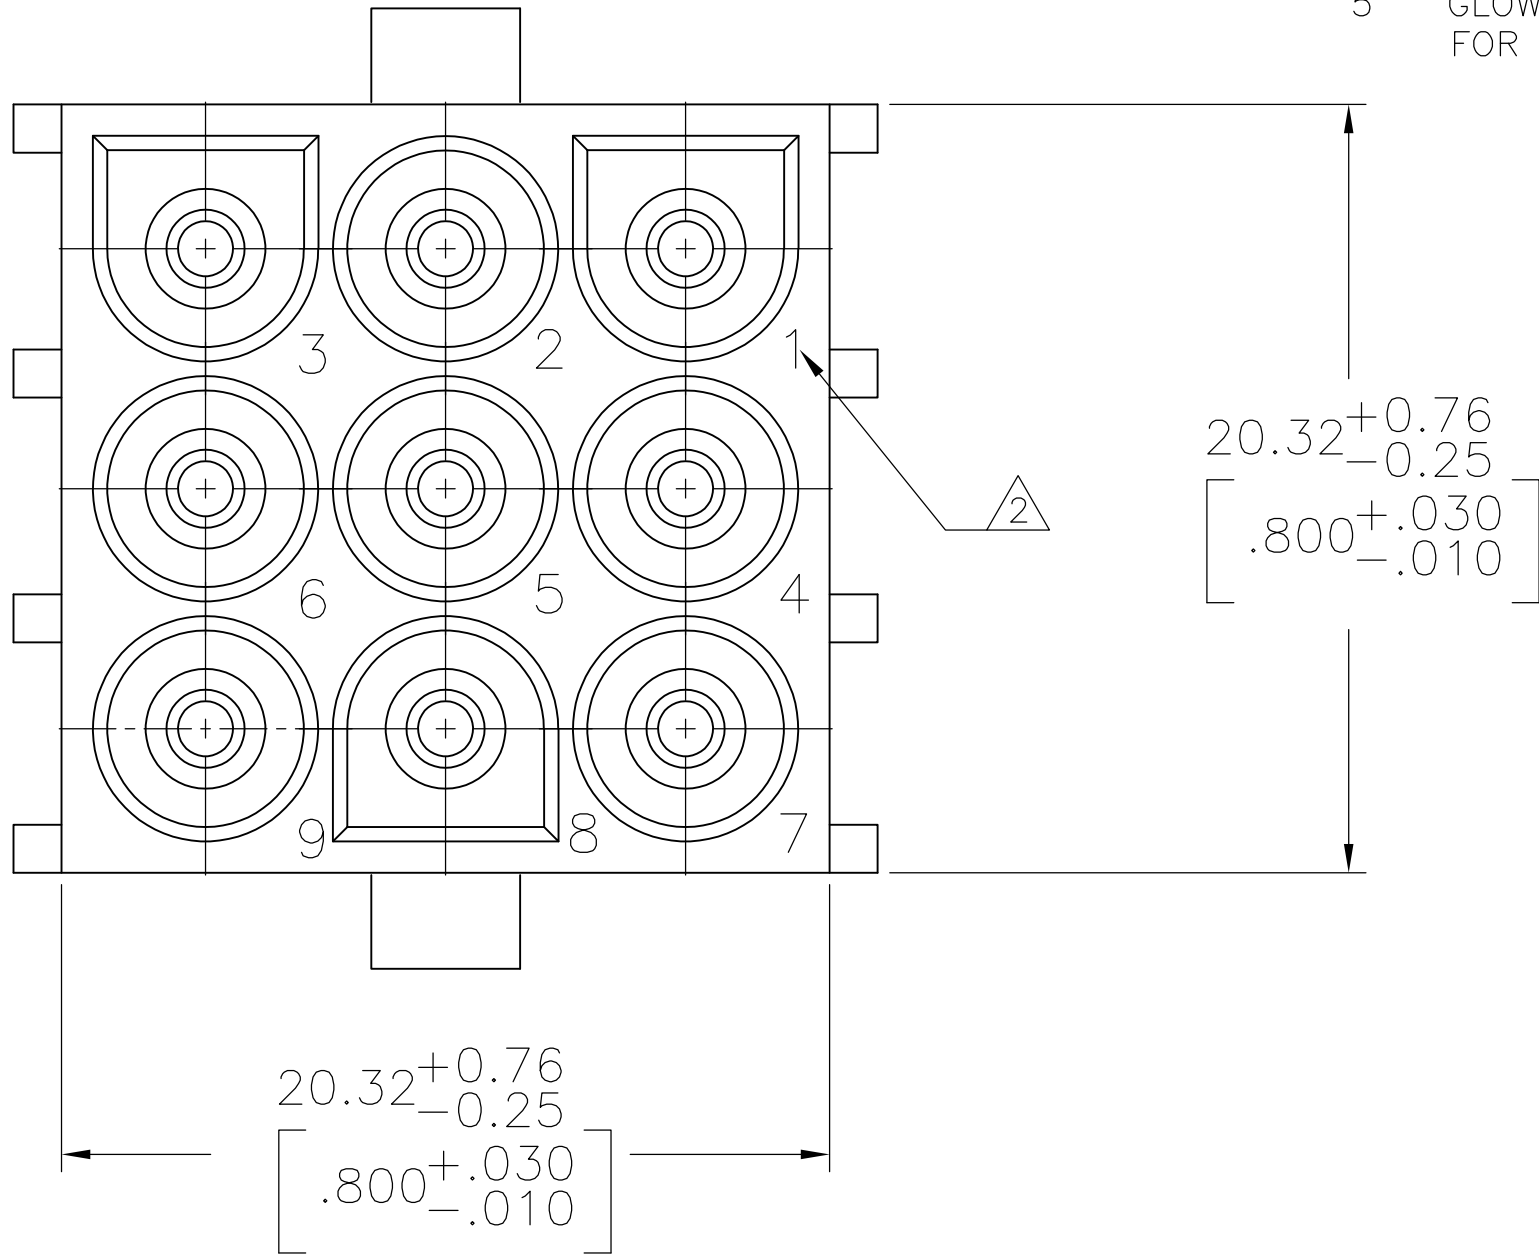


LOC	DIST	REVISIONS				
		REV	LTR	DESCRIPTION	DATE	APP'D
CM	00	A		REVISED PER ECR-16-002640	10MAR2016	BW EW

- 1
- PARTS MUST COMPLY WITH AMP SOLDERABILITY SPEC 109-11-3.
- 2
- CIRCUIT IDENTIFICATION CHARACTERS ARE ADJACENT TO THE INDICATED CAVITIES, BUT LOCATION AND ORIENTATION MAY DIFFER FROM PRINT.
- 3
- FLAMMABILITY UL V-0 FOR THICKNESS 0.4, 0.45, 0.8, 1.6, AND 3.0 PER IEC 60695-11-10.
- 4
- GLOW WIRE FLAMMABILITY (GWFI): 960°C FOR THICKNESS 0.45, 0.8, 1.6, AND 3.0 PER IEC 60695-2-12.
- 5
- GLOW WIRE IGNITION (GWIT): 825°C FOR THICKNESS 0.45, 800°C FOR THICKNESS 0.8, 775°C FOR THICKNESS 1.6 AND 3.0 PER IEC 60695-2-13.

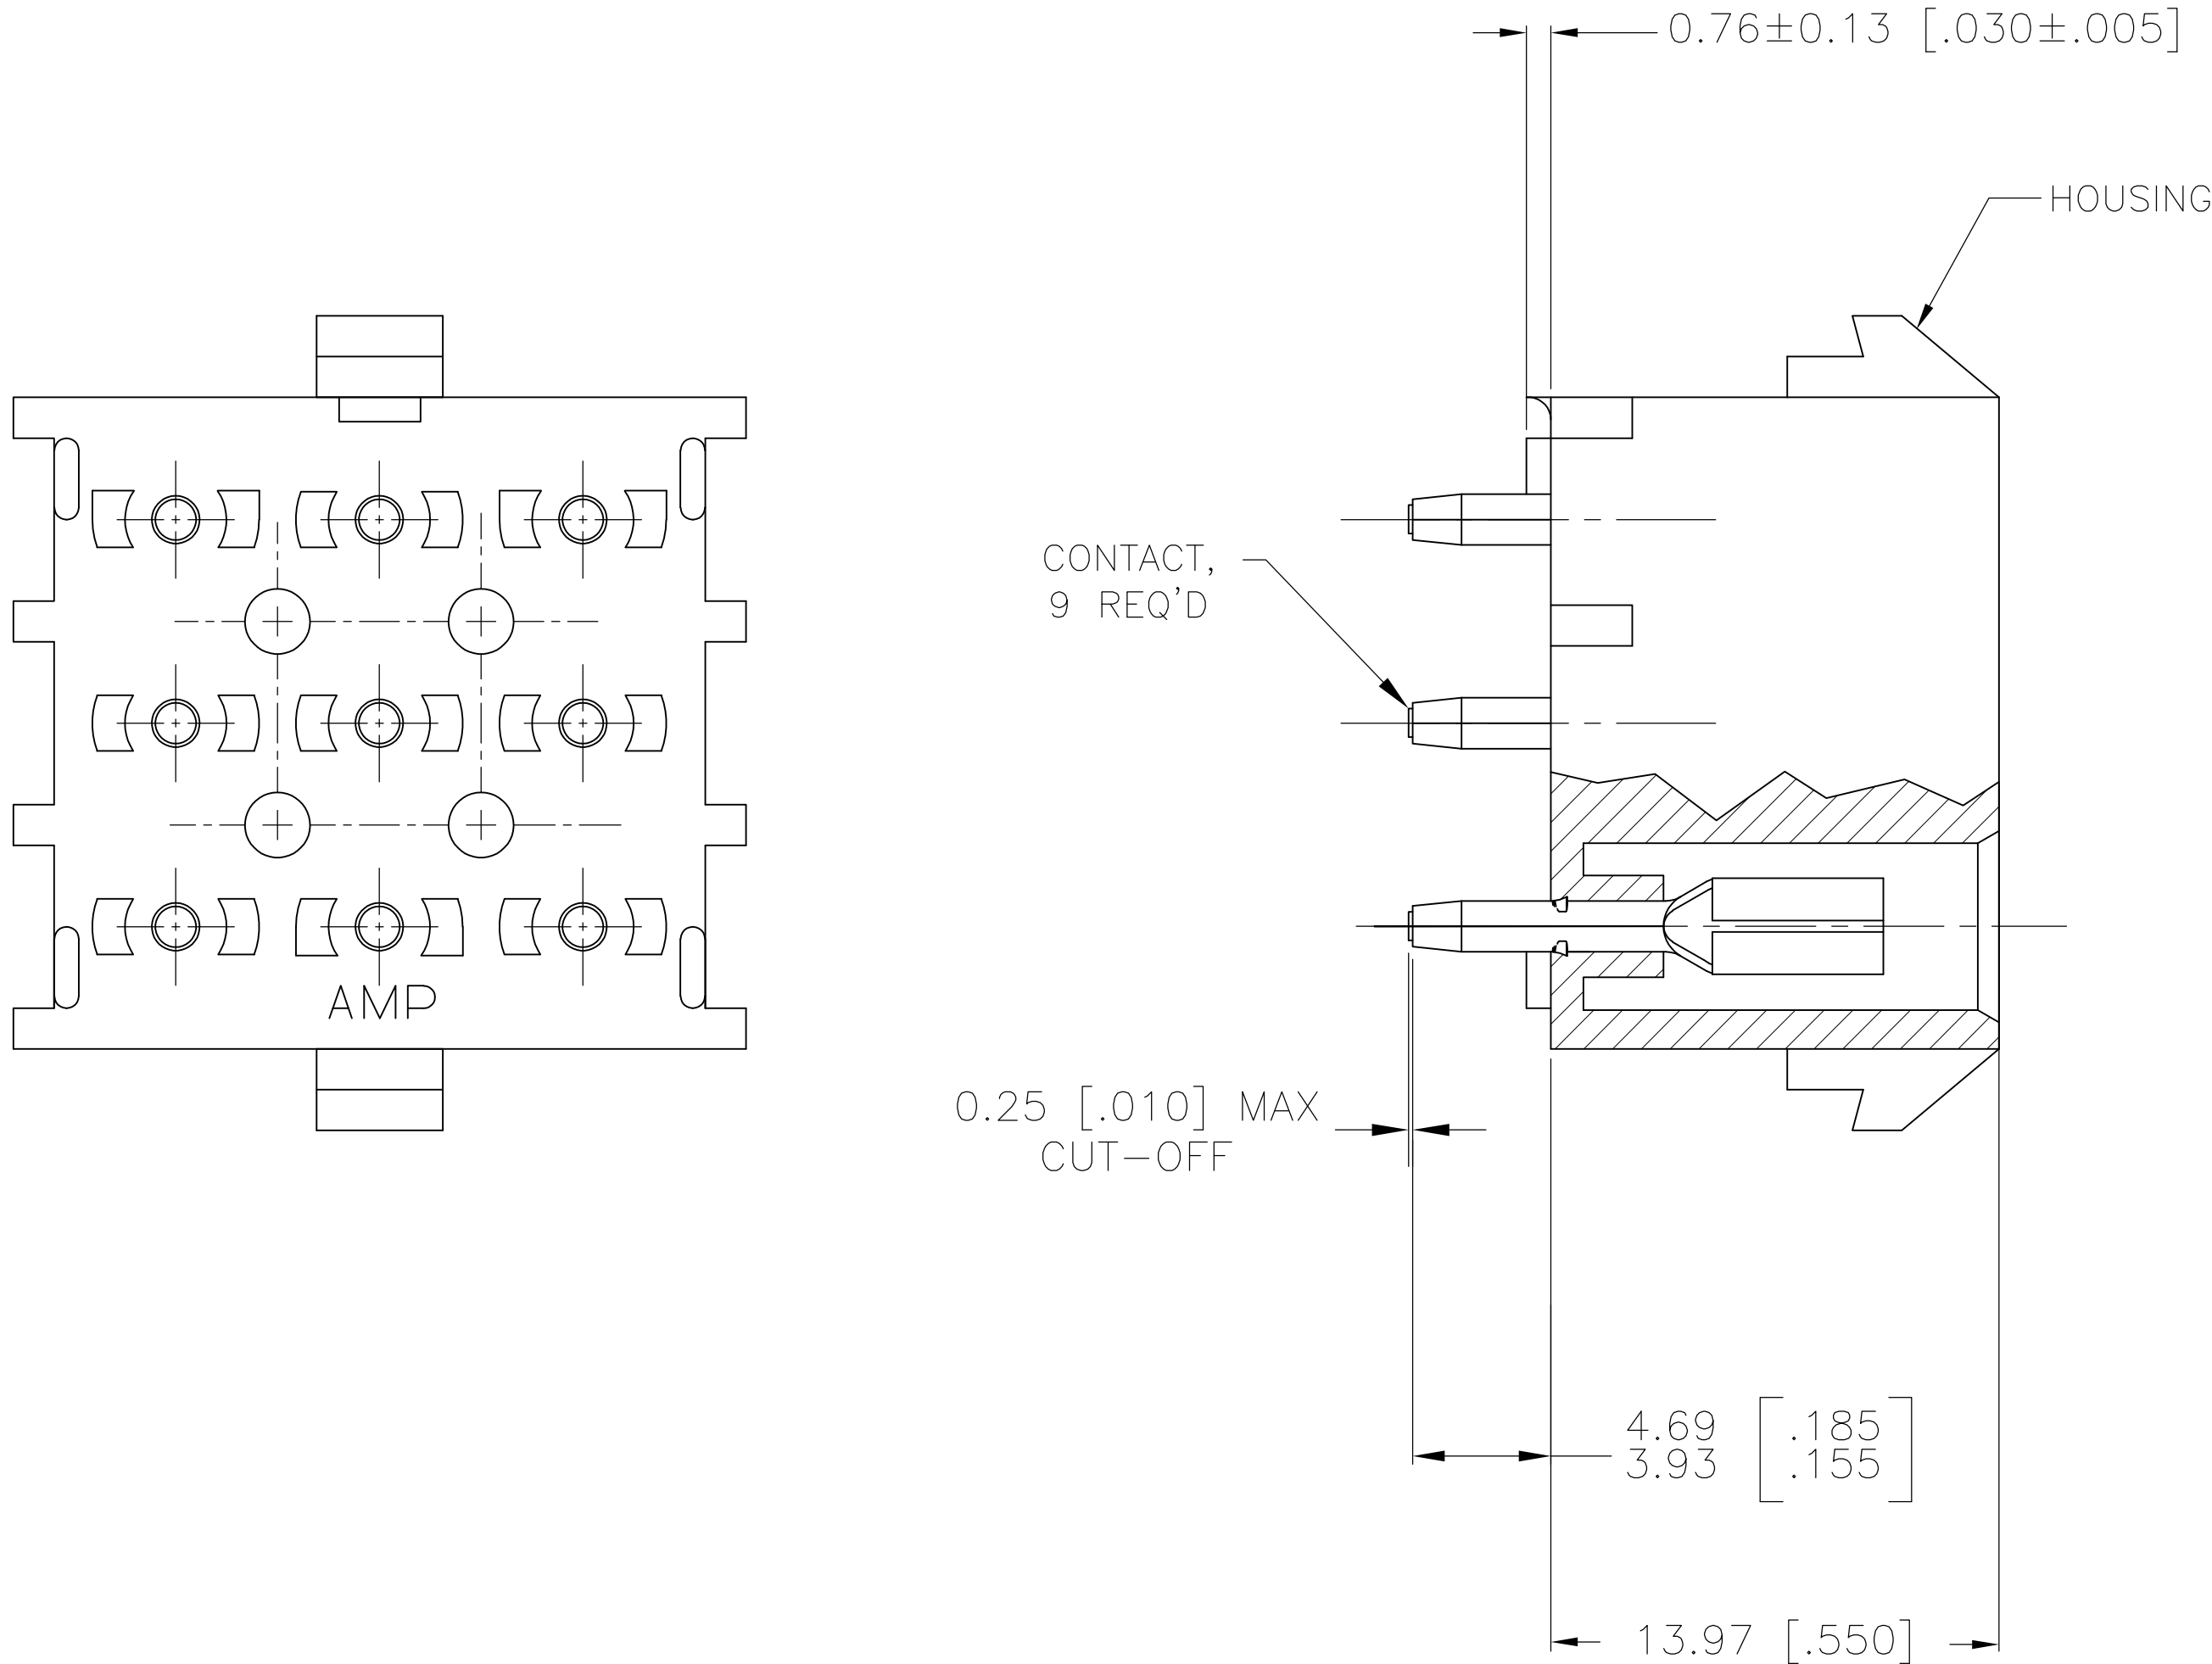

RECOMMENDED LAYOUT FOR 1.58 [.062] THICK PC BOARD

PH BRZ TIN	NYLON, UL V-0 GW, NATURAL	1969817-1
CONTACT	HOUSING	PART NO

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN BASVESH WARAD 26DEC2015	TE Connectivity	
		CHK WICKES, EVAN 26DEC2015		
DIMENSIONS: mm [INCHES]		APPROD WICKES, EVAN 26DEC2015	NAME	
		PRODUCT SPEC		9 CIRCUIT UNIVERSAL MATE-N-LOK (TM) P.C. BOARD SOCKET HEADER ASSEMBLY
		APPLICATION SPEC		SIZE A1
MATERIAL SEE TABLE		WEIGHT		CAGE CODE 00779
				DRAWING NO 1969817
				RESTRICTED TO A
				SCALE 5:1
				SHEET 1
				OF 1
				REV A