


		1	
	Part Number:	DRAWN	7/20/2017
SM15	CM1E0E00 7	CJ	7/20/2017
	SM150508-7	CHECKED	9/27/2017
		P.D.	
	Description:	APPROVED	0/27/2017
	Dynamic Speaker	C.E.	9/27/2017


This document contains data proprietary to DB Unlimited. Any use or reproduction, in any form, without prior written permission of DB Unlimited is prohibited. All terms and conditions can be found at www.dbunlimitedco.com

Bottom View

Top View

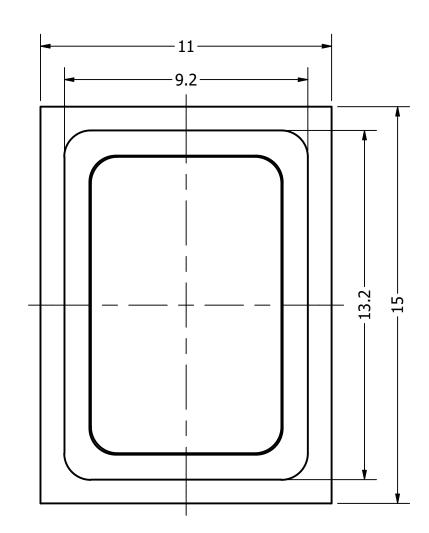

Side View

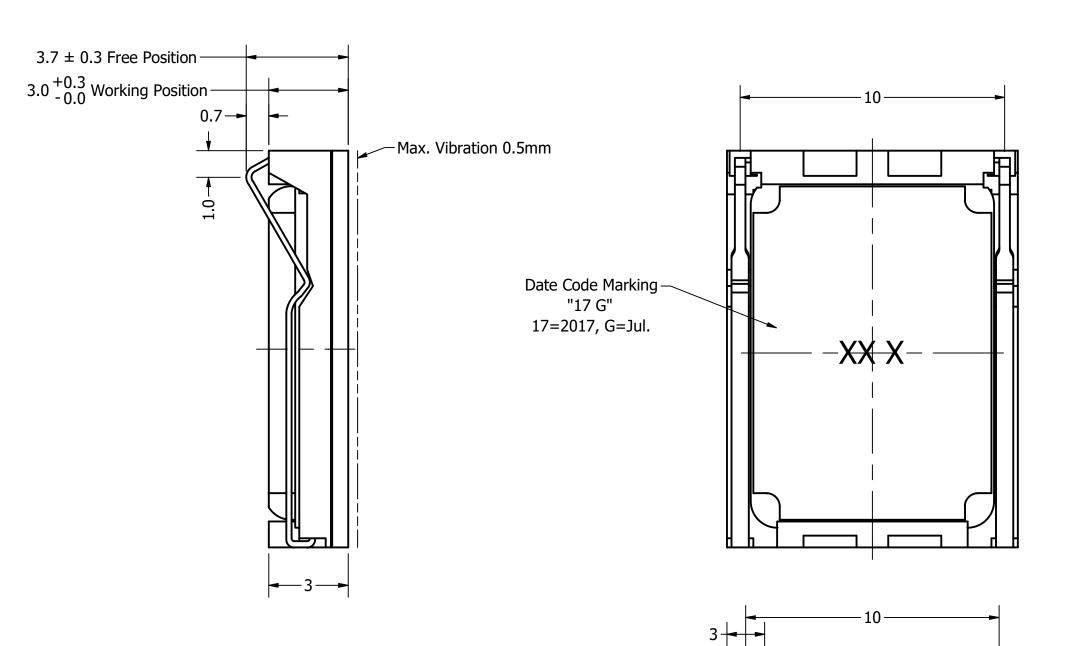

Items	Specifications	Conditions			·- 		
Sound Pressure Level 92 dB (@ 10cm), Avg.				'			
Resonant Frequency	550	Hz	REVISION HISTORY				
Frequency Range	550 ~ 10,000	Hz	REV	DESCRIPTION	DATE	APPROVED	
Nominal Power	0.75	W		Released from Engineering	9/27/2017	C.E.	
Max. Power	1	W	1	Updated SPL	7/13/2018	C.E.	
Impedance	8	Ω	NOTES				
Cone Material	Mylar			1) All dimensions are in mm unless otherwise noted			

Mount Type

Storage Temperature

Cone Material

Mount Type

Flush Mount

Cone Material

Flush Mount

Cone Material

Cone Mater

Operating Temperature-20 ~ +55°C4) Subject to change or redrawn without noticeWeight1.5g