



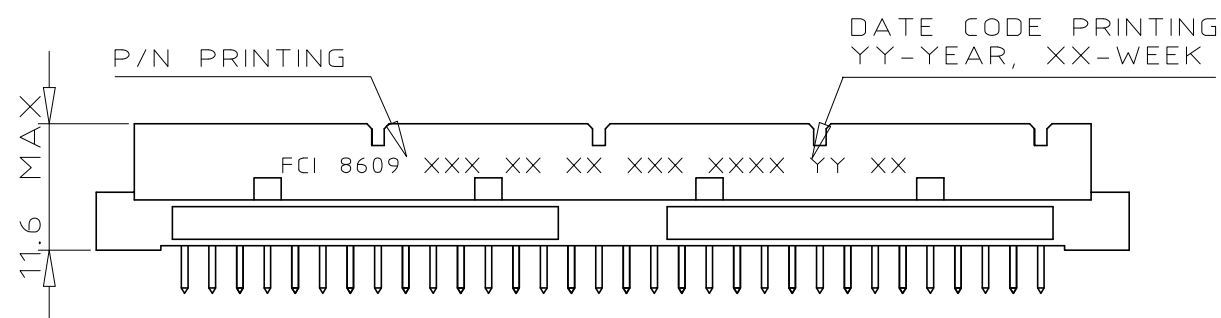


FCIconnect.com

Copyright FCI

DIMENSIONS

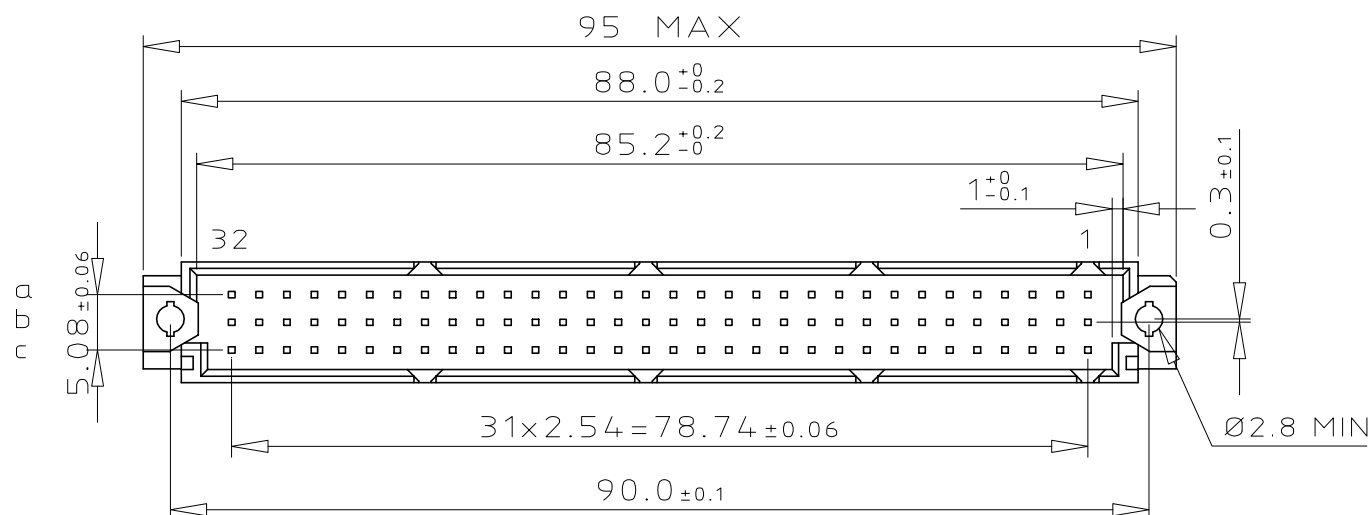


PCB LAYOUT

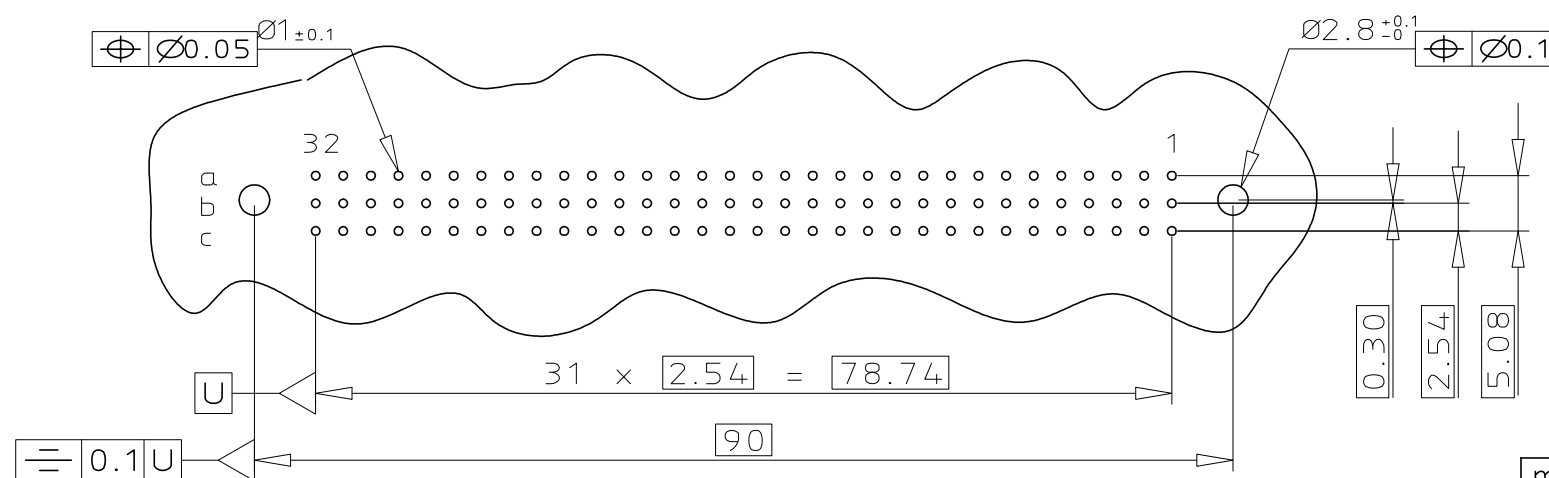

GENERAL CHARACTERISTICS & RoHS INFO

REFER DRAWING C-8609-0000A

TERMINATION

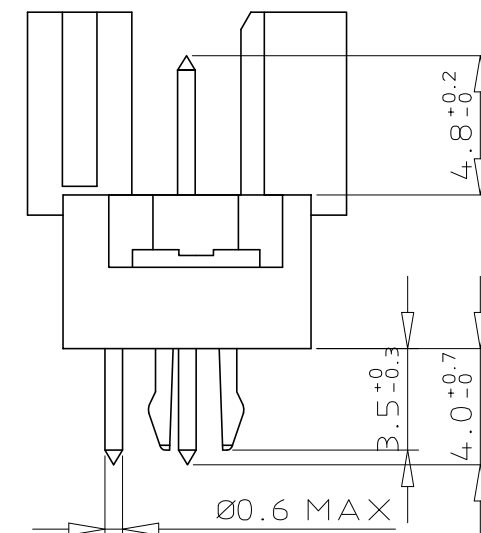

ORDERING INFORMATION

SERIES	8609	6	64	7	8	14	7	4	5	ELF
ROWS FITTED WITH CONTACTS										
ROW - b c		6	64							
NO. OF CONTACTS										
TYPE OF INSULATOR										
3 ROW MALE INSULATOR										
METHOD OF MOUNTING										
REVERSE MOUNTING - STYLE R										
TERMINATION										
STRAIGHT SPILL										
OPTIONS										
NO OPTION										
WITH HARPOONS										
PERFORMANCE CLASS										
DIN 41612 CLASS 3										
DIN 41612 CLASS 2										
DIN 41612 CLASS 1										
AS PER MIL C 55302 / JSS 50808										
PITCH PER ROW										
2.54 mm										
LEAD FREE VERSION										

mat'l. code	surface	tolerance	projection	product family
SEE DWG C-8609-0000A	ISO 1302	ISO 406 ISO 1101		8609
ltr	ecn no	dr	date	title
A	109-0053	KR	2009-04-04	DIN REVERSE HEADER
				DIN 41612 STYLE R
				dwg no
				sheet 1 of 1
				size
				A3
				type Product Customer Drawing
sheet index	revision sheet	A	1	