

### SAFETY ORGANIZATIONS

THIS FILTER HAS BEEN FORMALLY RECOGNIZED, CERTIFIED OR APPROVED BY THE LISTED AGENCY. THEREFORE, ALL TEST/REQUIREMENTS SPECIFIED IN THE LATEST REVISION OF THE FOLLOWING AGENCY STANDARDS HAVE BEEN MET:



UL RECONGNIZED: UL 1283



CSA CERTIFIED: CSA C22.2 No. 8



VDE APPROVED: EN 60939-2

#### RELIABILITY SPECIFICATIONS:

STORAGE TEMPERATURE: -40°C TO +85°C
HUMIDITY: 21 DAYS @ 40°C 95% RH.
CURRENT OVERLOAD TEST: 6 TIMES I<sub>r</sub> FOR 8 SECONDS

### RECOMMENDED RECEIVING INSPECTION HIPOT:

LINE TO GROUND: 1500 VAC FOR 1 MINUTE LINE TO LINE: 1450 VDC FOR 1 MINUTE

# FILTER APPROVAL:

THE BEST WAY TO SELECT AND QUALIFY A FILTER IS FOR YOUR ENGINEERING TO TEST THE UNIT IN YOUR EQUIPMENT.

## OPERATING SPECIFICATIONS

LINE CURRENT/VOLTAGE: 6 AMP, 120/250 VAC

LINE FREQUENCY: 50-60Hz

MAXIMUM LEAKAGE CURRENT, EACH LINE TO GROUND:


.25mA @ 120V, 60Hz .48mA @ 250V, 50Hz

OPERATING AMBIENT TEMP. RANGE:  $-10^{\circ}\text{C}$  TO  $+40^{\circ}\text{C}$  @ RATED CURRENT, Ir. IN AN AMBIENT, Tq. HIGHER THAN  $40^{\circ}\text{C}$ , THE MAXIMUM OPERATING CURRENT, Iq. IS AS FOLLOWS: T = T  $= \sqrt{.85 - \text{Te}}$ 

20°C AND 50% RH

## TEST SPECIFICATIONS:

INDUCTANCE: 8.73 mH NOMINAL
CAPACITANCE: (MEASURED @ 1KHz, 0.250VAC MAX., 25°C±1°C)
LINE TO GROUND: .006 µF ±20%
LINE TO LINE: .54 µF ±20%
DISCHARGE RESISTOR: 330 K \( \infty \)
L/G AND L/L 1.R.
NO DISCHARGE RESISTOR: 6000M \( \infty \) (MIN.) @ 100VDC,

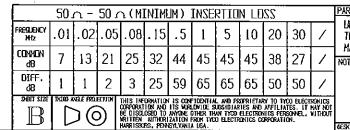

PARTS SHALL COMPLY WITH TYCO ELECTRON	<u>IICS 138-702 SPECIFICATION FOR HAZARDOUS SUBSTAN</u>	<b>ICE</b>
UNIESS OTHERWISE SPECIFIED TOLERANCE TO BE ±0.63 MATERIAL & FINISH: AS SUPPLIED	<b>ETE</b> TE Connectivity	
NOTES;	CUSTOMER DRAWING	
	IN HILLIHETERS TE PART NO: 6609036-5	
	1: 1200900	ÆΥ
GESKI-H.ckd Nov Leyant 2	DRV. BY: LJD DRIG: CFW 6ESK1	H