


P	LTR	DESCRIPTION	DATE	DWN	APVD
	A	INITIAL	26Feb2015	GY	CW

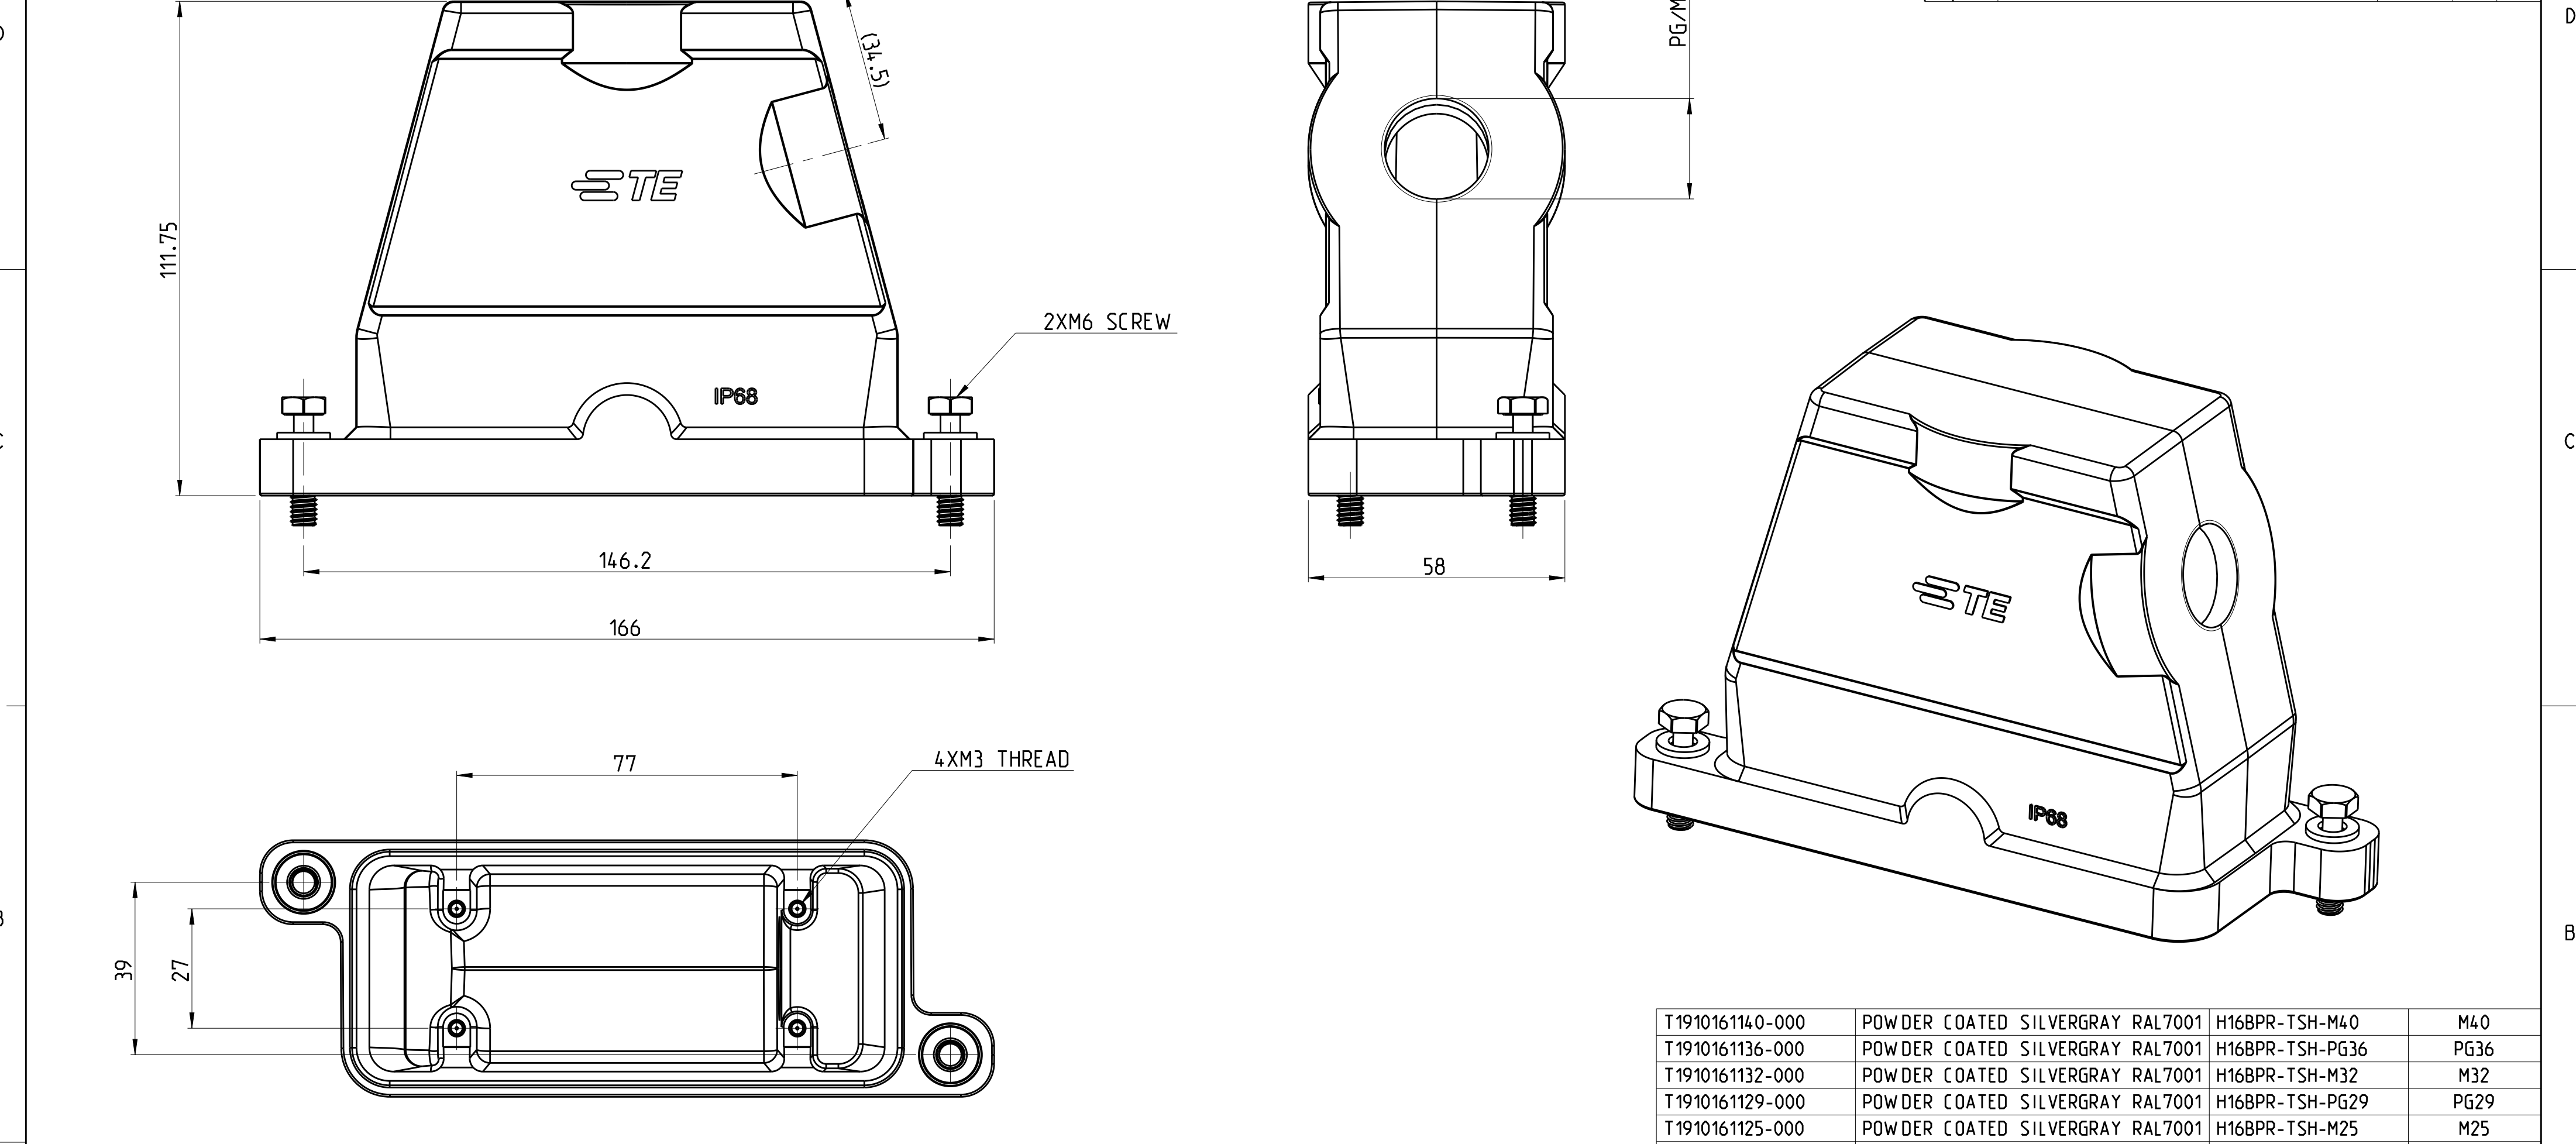

NOTES:
1. TECHNICAL CHARACTERISTICS:
HOOD MATERIAL: DIE CAST ALUMINIUM ALLOY
SURFACE TREATMENT: SEE TABLE
OPERATION TEMPERATURE: -40°C~+125°C
DEGREE OF PROTECTION: IP68 (MATED)

注释
1. 技术参数:
壳体材料: 铝合金
表面处理: 见表格
工作温度: -40°C~+125°C
防护等级: IP68 (配合)

T1910161140-000	POWDER COATED SILVERGRAY RAL7001	H16BPR-TSH-M40	M40
T1910161136-000	POWDER COATED SILVERGRAY RAL7001	H16BPR-TSH-PG36	PG36
T1910161132-000	POWDER COATED SILVERGRAY RAL7001	H16BPR-TSH-M32	M32
T1910161129-000	POWDER COATED SILVERGRAY RAL7001	H16BPR-TSH-PG29	PG29
T1910161125-000	POWDER COATED SILVERGRAY RAL7001	H16BPR-TSH-M25	M25
T1910161121-000	POWDER COATED SILVERGRAY RAL7001	H16BPR-TSH-PG21	PG21
T1910160140-000	POWDER COATED BLACK RAL9005	H16BPR-TSH-M40	M40
T1910160136-000	POWDER COATED BLACK RAL9005	H16BPR-TSH-PG36	PG36
T1910160132-000	POWDER COATED BLACK RAL9005	H16BPR-TSH-M32	M32
T1910160129-000	POWDER COATED BLACK RAL9005	H16BPR-TSH-PG29	PG29
T1910160125-000	POWDER COATED BLACK RAL9005	H16BPR-TSH-M25	M25
T1910160121-000	POWDER COATED BLACK RAL9005	H16BPR-TSH-PG21	PG21
PART NUMBER	SURFACE TREATMENT	DESCRIPTION	THREAD PG/M

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN Gino.Yao 14Dec2014	TE Connectivity	
		CHK Chris.Wang 14Dec2014		
DIMENSIONS: mm		APVD Xiang.Xu 14Dec2014	NAME H16BPR-TSH-PG/M	
		PRODUCT SPEC 108-137014	SIZE A2	
		APPLICATION SPEC 114-137014		
MATERIAL -	TOLERANCES UNLESS OTHERWISE SPECIFIED: 0 PLC ± 1 PLC ± 2 PLC ± 3 PLC ± 4 PLC ± ANGLES ± FINISH	WEIGHT -	CAGE CODE -	
		Customer Drawing	DRAWING NO T191016X1XX000	
			RESTRICTED TO -	
			SCALE 1:1	
			SHEET 1 OF 1	
			REV A	