


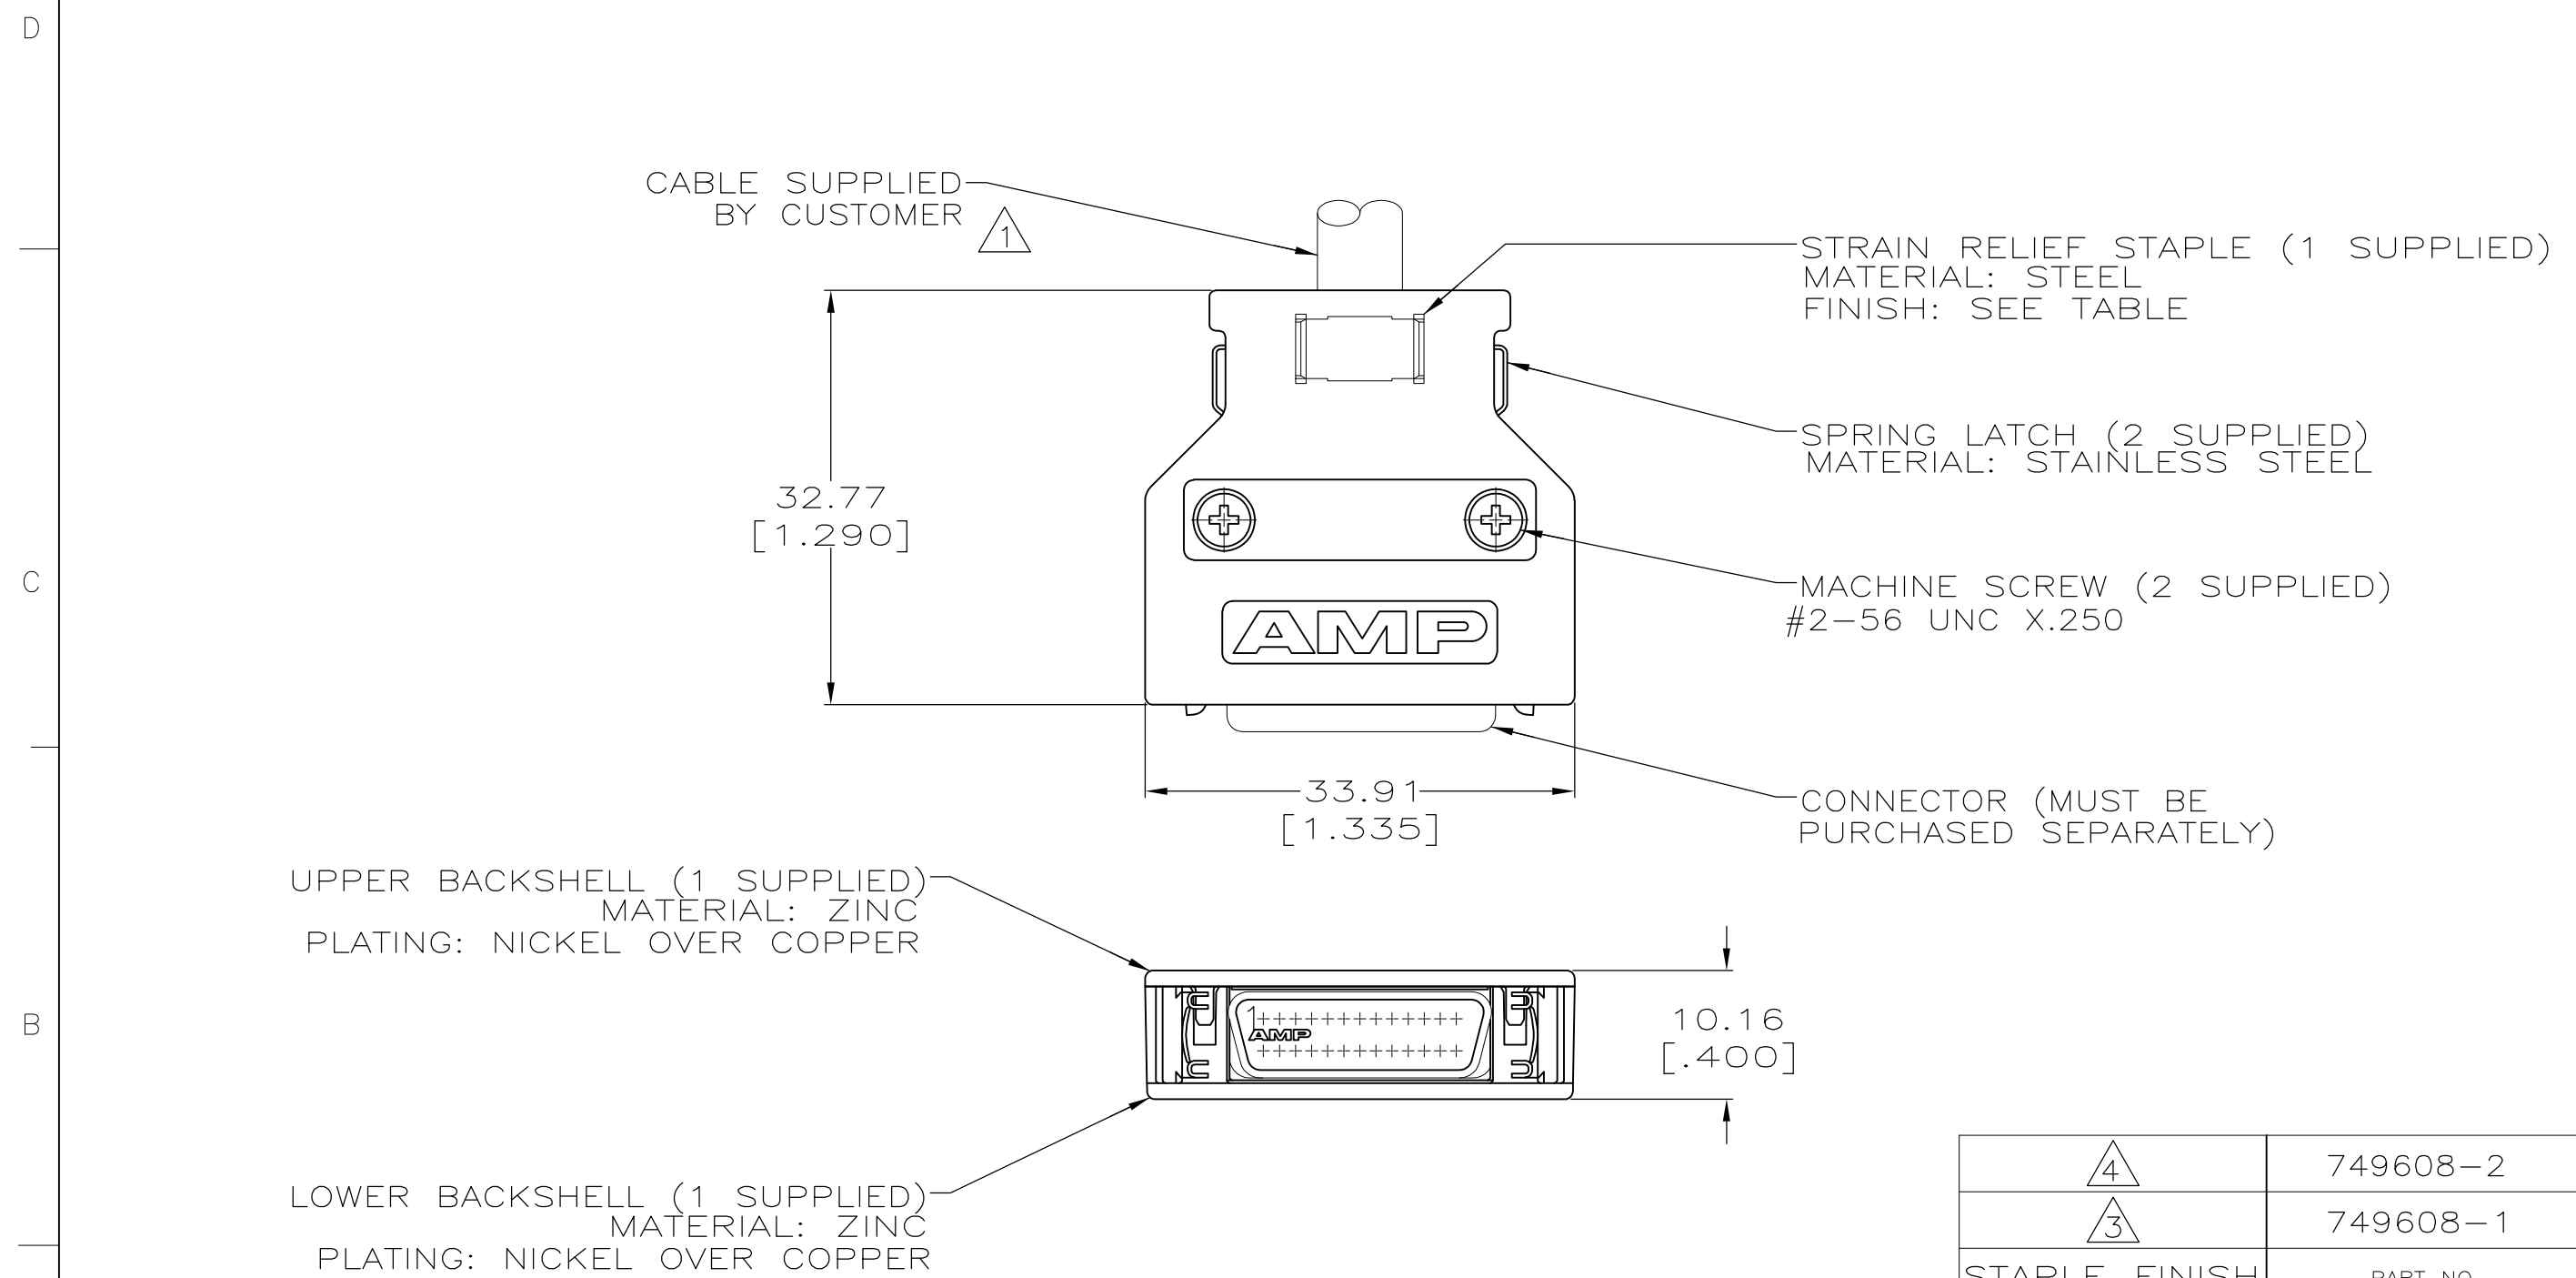

- 1 .270 MAX CABLE DIA
 - 2. DIMENSIONS IN BRACKETS ARE IN INCHES.
 - 3 BRIGHT TIN-LEAD OVER NICKEL.
 - 4 BRIGHT TIN OVER NICKEL.
- METRIC

4	749608-2
3	749608-1
STAPLE FINISH	PART NO

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN M.MCCAFFREY 05/08/89	TE Connectivity		
DIMENSIONS: mm[INCHES]		CHK M.E.SHIRK 05/11/89			
	TOLERANCES UNLESS OTHERWISE SPECIFIED: 0 PLC ± - 1 PLC ± - 2 PLC ± - 3 PLC ± 0.38 [.015] 4 PLC ANGLES ± -	APVD J.BROSCARD 05/23/89	NAME INDIVIDUAL KIT, 26 POSITION, REDUCED WIDTH, STRAIGHT EXIT, UNKEYED, AMPLIMITE .050 Series		
		PRODUCT SPEC	SIZE A3		
		APPLICATION SPEC	CAGE CODE 00779		
MATERIAL -	FINISH -	WEIGHT -	DRAWING NO C-749608		
CUSTOMER DRAWING			SCALE 2:1	SHEET 1 of 1	REV A1