


D

C

B

A

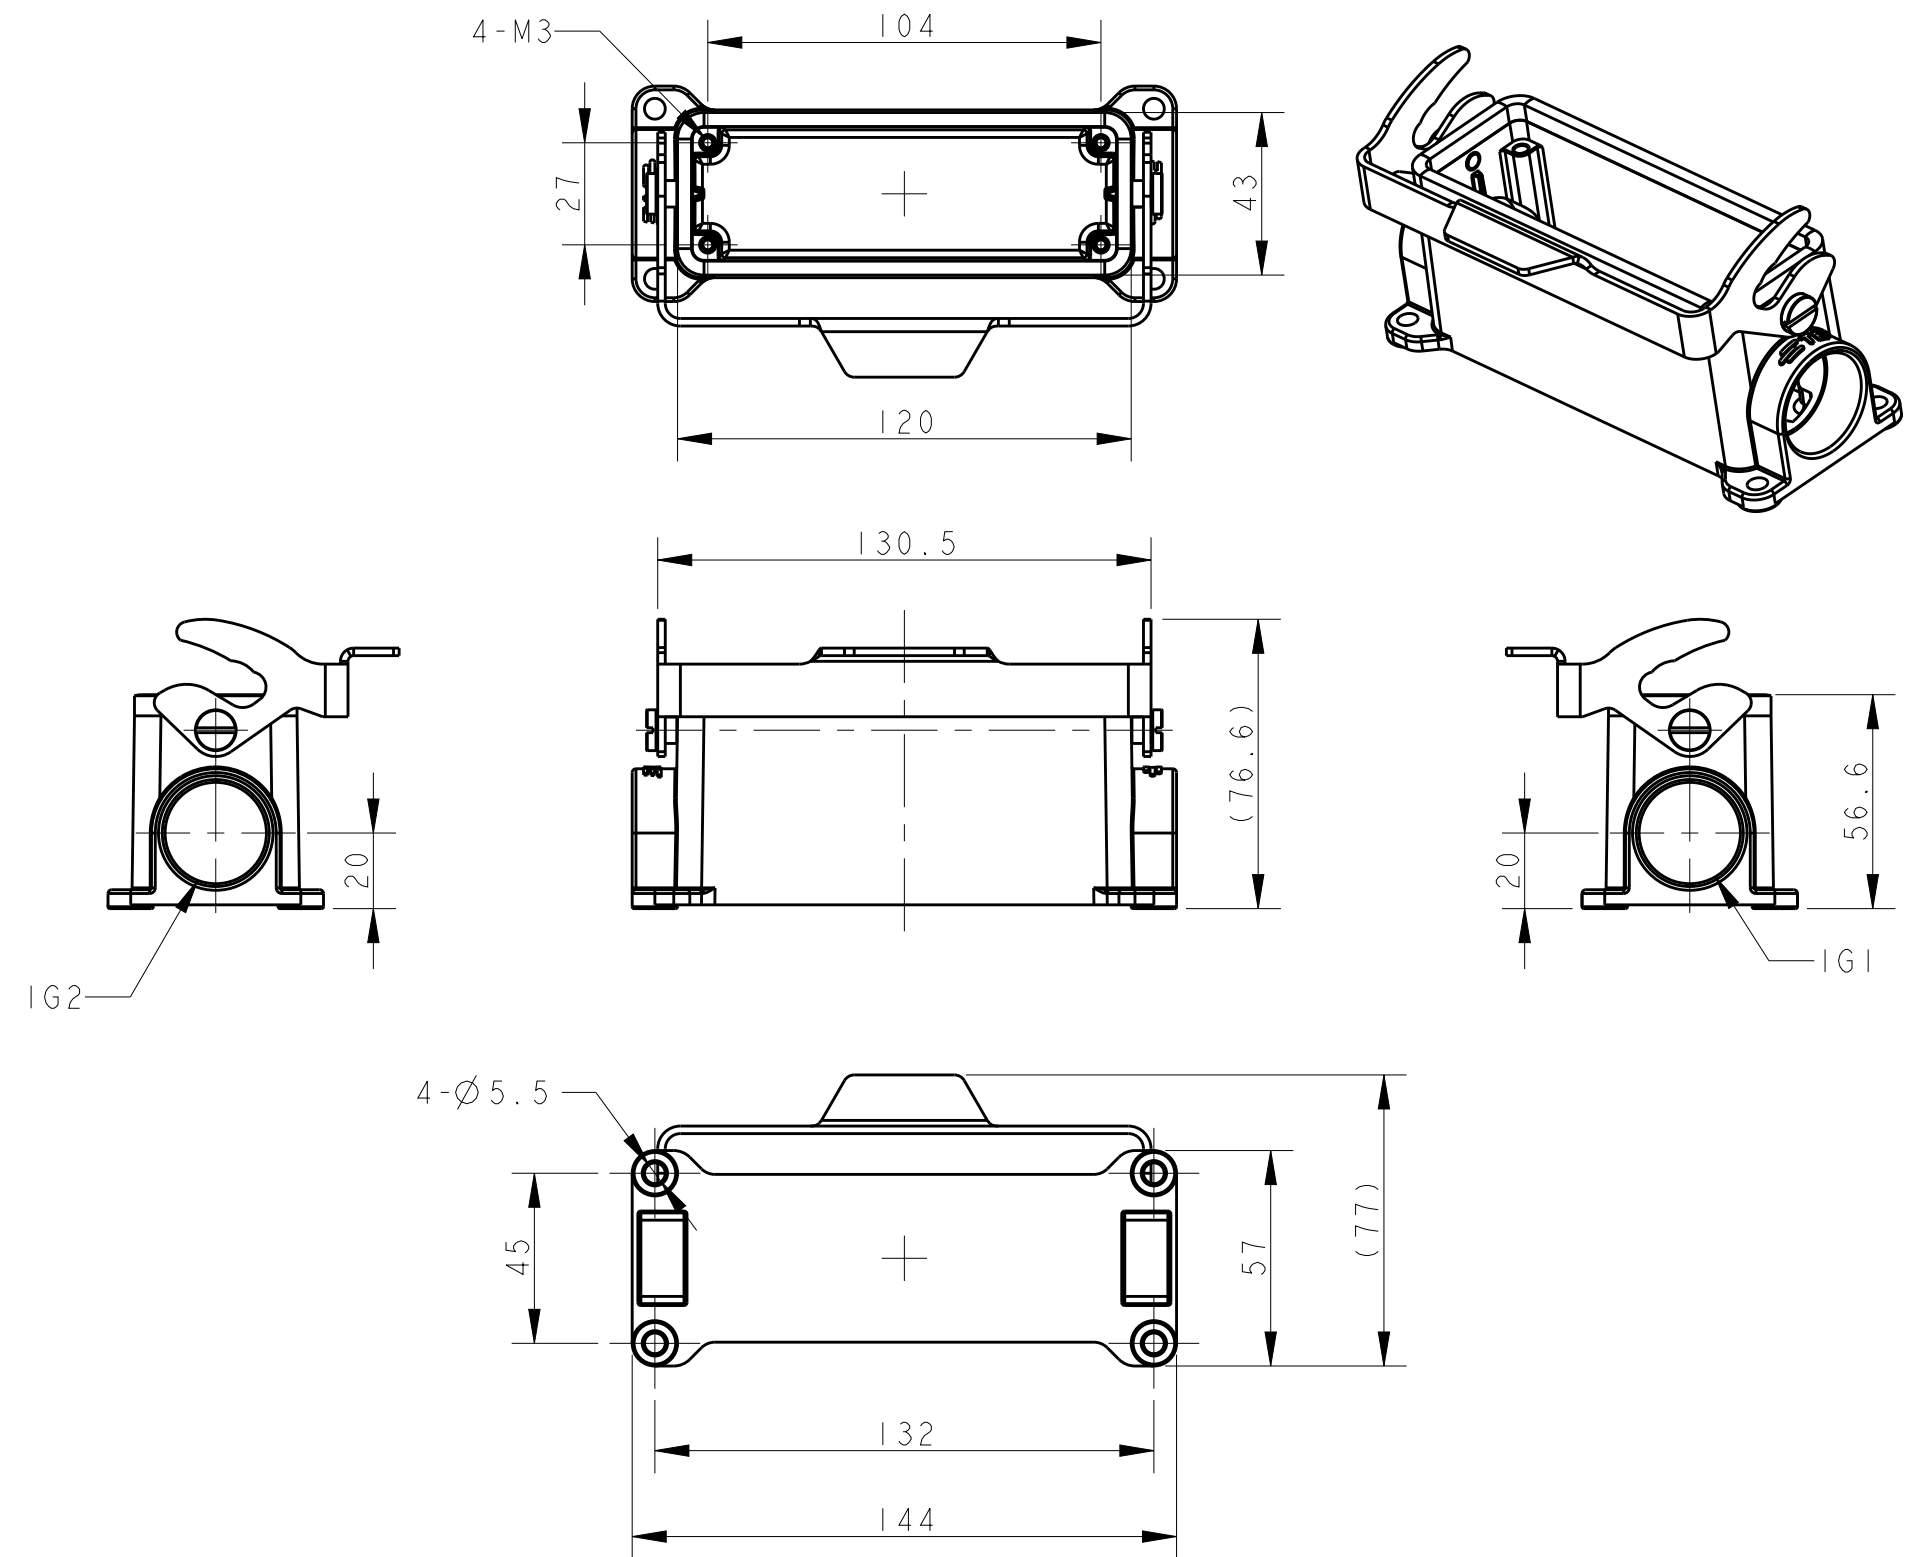


TYPE 1: BODY + SINGLE STEEL LOCKING


NOTES:
1. TECHNICAL CHARACTERISTICS:
BODY MATERIAL: DIE CAST ALUMINIUM ALLOY
SURFACE TREATMENT: POWDER-COATED, GRAY
OPERATION TEMPERATURE: -40-+125°C
DEGREE OF PROTECTION: IP65 (MATED)

注释:
1. 技术参数:
主体材料: 铝合金
表面处理: 粉末喷涂, 灰色
工作温度: -40-+125°C
防护等级: IP65(配合)

TI610243121-000	TYPE 1	H24B-SGR-LB-PG21	PG21	-
TI610243125-000		H24B-SGR-LB-M25	M25	-
TI610243221-000		H24B-SGR-LB-2PG21	PG21	PG21
TI610243225-000		H24B-SGR-LB-2M25	M25	M25
TI620243121-000	TYPE 2	H24B-SDR-LB-PG21	PG21	-
TI620243125-000		H24B-SDR-LB-M25	M25	-
TI620243221-000		H24B-SDR-LB-2PG21	PG21	PG21
TI620243225-000		H24B-SDR-LB-2M25	M25	M25
TI620243421-000	TYPE 3	H24B-SDRM-LB-PG21	PG21	-
TI620243425-000		H24B-SDRM-LB-M25	M25	-
TI620243321-000		H24B-SDRM-LB-2PG21	PG21	PG21
TI620243325-000		H24B-SDRM-LB-2M25	M25	M25
ASSEMBLY PART NUMBER	TYPE	ASSEMBLY PART DESCRIPTION	IG1	IG2

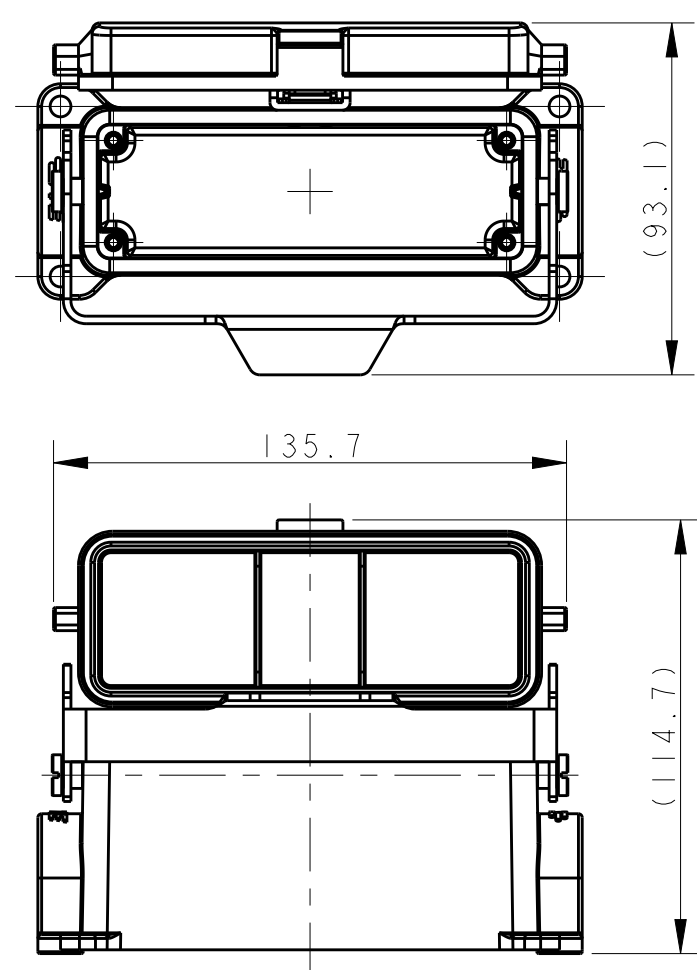

TYPE 2: BODY + SINGLE STEEL LOCKING + PLASTIC PROTECTION COVER
OTHER SPEC REFER TO TYPE 1

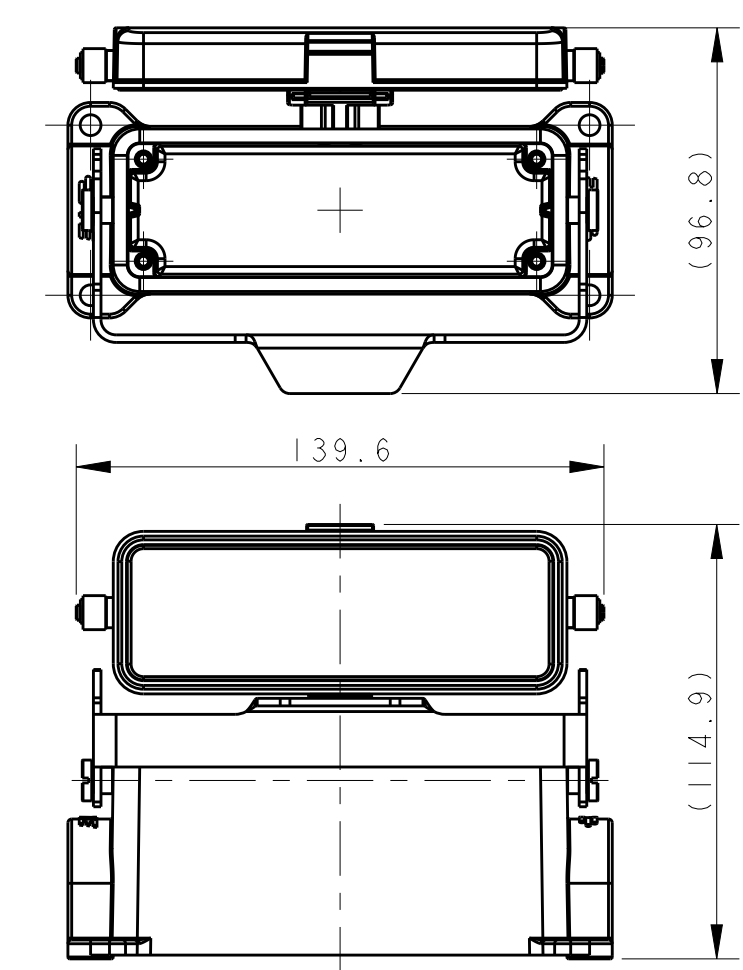

TYPE 3: BODY + SINGLE STEEL LOCKING + METAL PROTECTION COVER
OTHER SPEC REFER TO TYPE 1



D

C

B

A

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN DAVID LI 02JUL2015	TE Connectivity			
		CHK CHRIS WANG 02JUL2015				
		APVD XU XIANG 02JUL2015	NAME H24B-SGR/SDR/SDRM-LB-PG/M			
DIMENSIONS: mm		TOLERANCES UNLESS OTHERWISE SPECIFIED:	PRODUCT SPEC 108-137013			
			APPLICATION SPEC 114-137013			
MATERIAL TBD			WEIGHT -			
			Customer Drawing			
			SIZE A2	CAGE CODE -	DRAWING NO. ©-TI6X0243XXXX00	RESTRICTED TO -
			SCALE 1:2	SHEET 1	OF 2	REV A

