

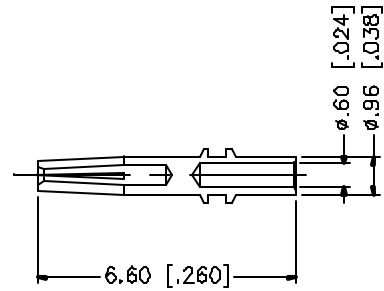


REV.	DATE	DESCRIPTION
A	03/27/05	UPDATE DRAWING FORMAT

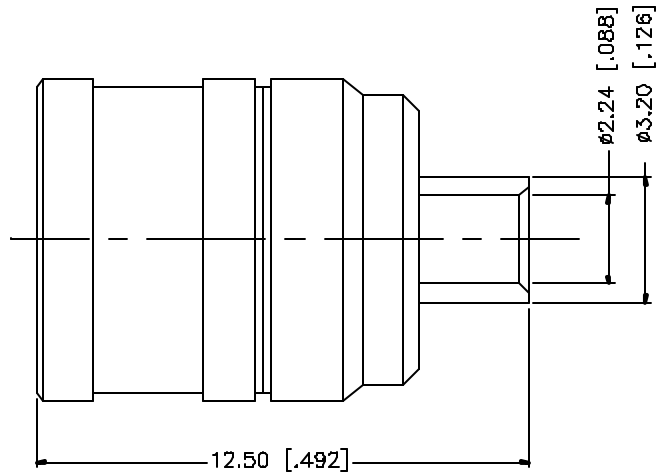

RECOMMENDED
CABLE STRIPPING DIM'S

					UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS. DIMENSIONS IN () ARE IN INCHES AND FOR CUSTOMER REFERENCE ONLY.	APPROVALS	DATE	Amphenol Connex					
8						DRAWN	G.R.S.					03/27/05	
7						UNLESS OTHERWISE SPECIFIED TOLERANCES FOR MILLIMETERS ARE: 0.5 - 8mm ± 0.20mm 8 - 30mm ± 0.40mm 30 - 120mm ± 0.50mm			CHECKED		PART DESCRIPTION SMB DIRECT SOLDER PLUG (FOR .085", .086")		
6									ISSUED				
5						UNLESS OTHERWISE SPECIFIED TOLERANCES FOR INCHES ARE: .020 - .315 = ± 0.007" .315 - 1.180 = ± 0.015" 1.180 - 4.724 = ± 0.020"			SHEET 1 OF 1		PART NO. 142212		
4													
3	CONTACT PIN	BRASS	GOLD	1					CAD FILE		DWG. NO. 142212.DWG		
2	INSULATOR	TEFLON	NATURAL	1					C:/142/142212.DWG				
1	BODY	BRASS	GOLD	1							SIZE A		
	DESCRIPTION	MATERIAL	FINISH	QTY	DO NOT SCALE DRAWING						SCALE NA		