


MAX solutions

Mill-Max Right Angle Test Point Sockets

- The individual test points accept probe diameters of 1, 1.5 and 2mm; the two-pin socket will accept a halogen lamp having 1mm diameter leads on 4mm centers.
- All test points use precision-machined brass pins incorporating beryllium copper "multi-finger" contacts for maximum reliability.
- Insulators use high temperature thermoplastic that is suitable for hand, wave or intrusive reflow soldering. Insulators can be molded in various colors for visual identification of power and ground.
- All test points have a press-fit feature for retention in the circuit board prior to soldering. In addition, "solder-lok" bifurcated pegs provide secure hold down when soldered into plated through-holes.

For more information, please visit mill-max.com/PR505.

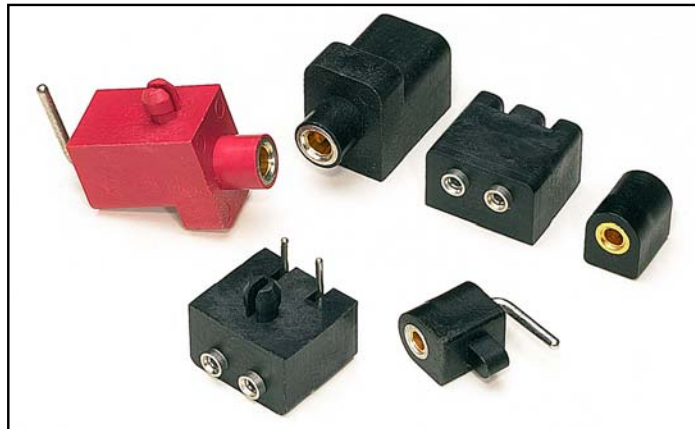

(7/09 - 501, 502, 505)

Mill-Max Mfg. Corp. • 190 Pine Hollow Road, Oyster Bay, NY 11771-0300
516-922-6000 • Fax: 516-922-9253 • www.mill-max.com





MISCELLANEOUS SOCKETS

Right Angle Socket

Test Point

Series 395...3XX


- Available to accept 3 pin sizes: 1, 1.5, & 2mm.
- Uses Hi-Temp PCT polyester insulator.
- Standard Insulator color is black.

RoHS
2002/95/EC

Pin Size	Ordering Information
1.0mm	395-XX-101-34-34X000
1.5mm	395-XX-101-03-38X000
2.0mm	395-XX-101-07-35X000

Insulator Color Options

X= 0 - Black

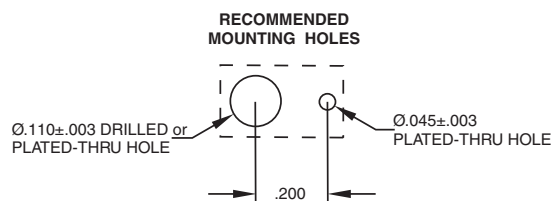

*For Electrical,
Mechanical & Enviromental
Data, See pg. 4*

XX=Plating Code
See Below

For RoHS compliance
select ◇ plating code.

SPECIFY PLATING CODE XX=	13◇		93				
Sleeve (Pin)		10µ" Au		200µ" Sn/Pb			
Contact (Clip)		30µ" Au		30µ" Au			