


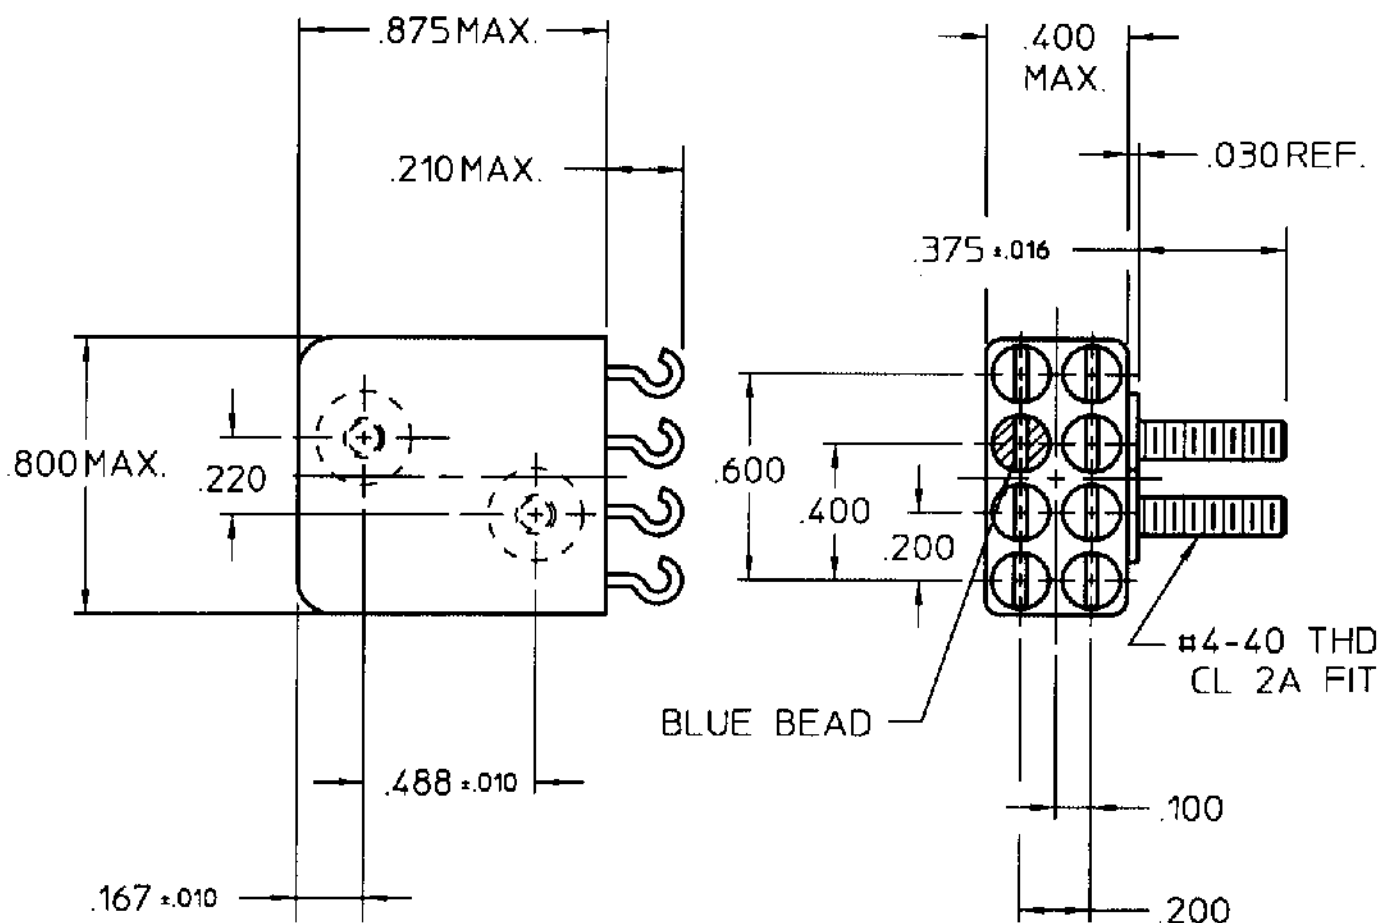

COIL: @ +25 °C

RESISTANCE 675 OHMS ± 10%

NOMINAL VOLTAGE 26.5 VDC

MUST OPERATE 13.5 VDC

MUST RELEASE

ENVIRONMENT:


VIBRATION 10 CPS TO 2000 CPS @ 20 g's

SHOCK 50 g's 11 MS. DURATION

TEMPERATURE -65 °C TO +125 °C

NOTES: OPERATE & RELEASE 6 MS MAX.
BOUNCE 2 MS MAX.

CUSTOMER DATA SHEET

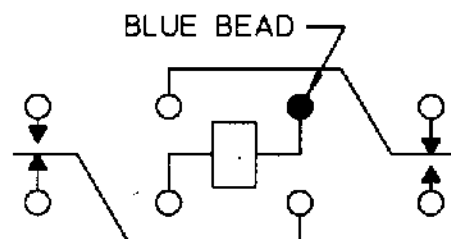

CONTACT RATING: LOW LEVEL TO
3 AMPS 28 VDC, 1 AMP 115 VAC RESISTIVE
100,000 OPERATIONS

DR. R.B. 5/29/97 CK. 5/29/97



COMMUNICATIONS
INSTRUMENTS, INC.

CUST. C. I. I. STD.

CUST. NO.

TYPE "RP" RELAY

RP7640G1