

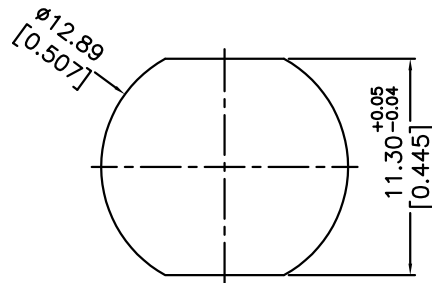
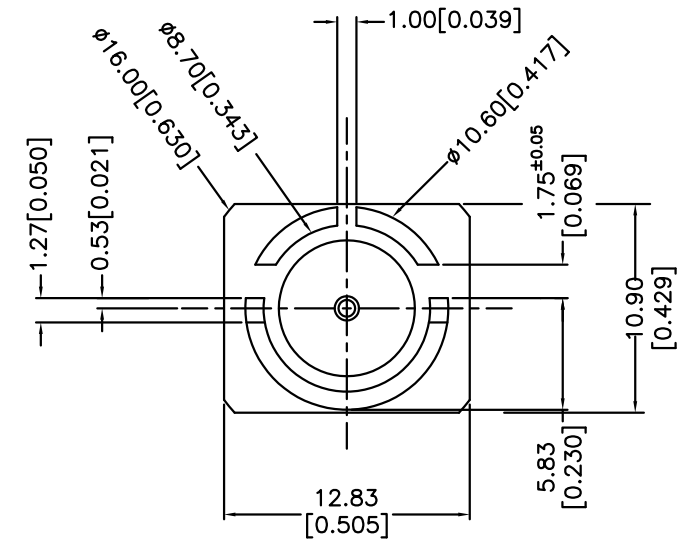
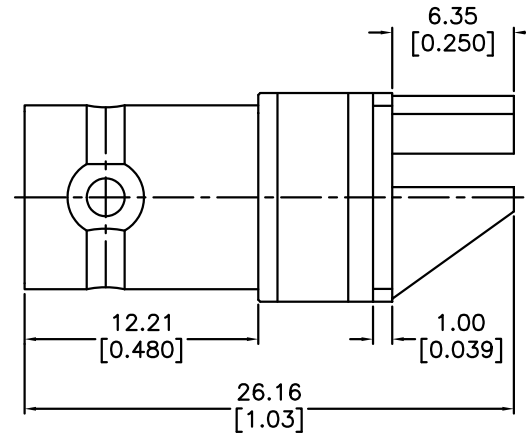
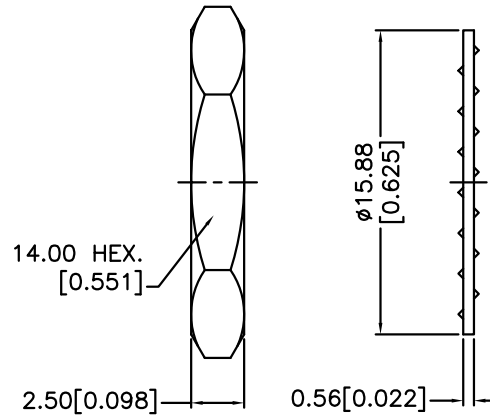


REV.	DATE	DESCRIPTION
A	05/03/2010	RELEASE TO MFG.

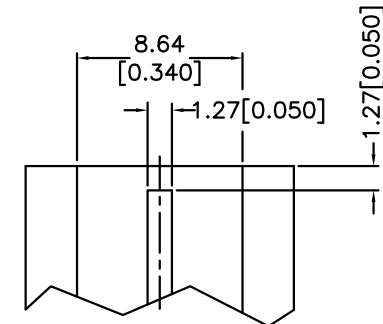

RECOMMENDED
MOUNTING HOLE DIMENSIONS

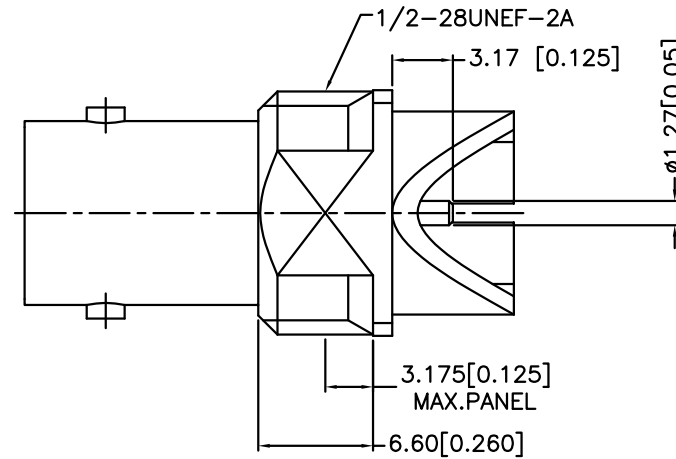

RECOMMENDED
PCB LAYOUT

NOTES: FINISH (PLATING THICKNESS IN MICRO-INCHES)

					UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS. DIMENSIONS IN [] ARE IN INCHES AND FOR CUSTOMER REFERENCE ONLY. UNLESS OTHERWISE SPECIFIED TOLERANCES FOR MILLIMETERS ARE: 0.5 – 8mm ± 0.20mm 8 – 30mm ± 0.40mm 30 – 120mm ± 0.50mm UNLESS OTHERWISE SPECIFIED TOLERANCES FOR INCHES ARE: .020 – .315 = ± 0.007" .315 – 1.180 = ± 0.015" 1.180 – 4.724 = ± 0.020" DO NOT SCALE DRAWING	APPROVALS		DATE		AMPHENOL CONNEX											
						DRAWN	CLEMENT	05/03/2010													
						CHECKED				PART DESCRIPTION											
6	HEX NUT	BRASS	NICKEL	1		ISSUED				BNC END LAUNCH RECEPTACLE JACK,75 OHMS EXTENDED THREADS											
5	LOCK WASHER	BRASS	NICKEL	1		SHEET		1 OF 1													
4	HOUSING	BRASS	GOLD	1							PART NO.										
3	CONTACT PIN	PHOSPHOR BRONZE	GOLD	1							112740-20										
2	INSULATOR	TEFLON	NATURAL	1		CAD FILE					DWG. NO.										
1	BODY	BRASS	GOLD	1		C:\112\112740-20.DWG					112740-20.DWG										
NO	DESCRIPTION	MATERIAL	FINISH	QTY							REV.		A		SIZE		A		SCALE		NA

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS. DIMENSIONS IN [] ARE IN INCHES AND FOR CUSTOMER REFERENCE ONLY.

UNLESS OTHERWISE SPECIFIED TOLERANCES FOR MILLIMETERS ARE:
0.5 - 8mm ± 0.20mm
8 - 30mm ± 0.40mm
30 - 120mm ± 0.50mm

UNLESS OTHERWISE SPECIFIED TOLERANCES FOR INCHES ARE:
.020 - .315 = ± 0.007"
.315 - 1.180 = ± 0.015"
1.180 - 4.724 = ± 0.020"

DO NOT SCALE DRAWING

NO	DESCRIPTION	MATERIAL	FINISH	QTY
6	HEX NUT	BRASS	NICKEL	1
5	LOCK WASHER	BRASS	NICKEL	1
4	HOUSING	BRASS	GOLD	1
3	CONTACT PIN	PHOSPHOR BRONZE	GOLD	1
2	INSULATOR	TEFLON	NATURAL	1
1	BODY	BRASS	GOLD	1