



1	—	—	—
	—	—	—
2	—	—	—
	—	—	—
	—	—	—
	—	—	—
	—	—	—
3	—	—	—
	—	—	—
4	—	—	—
	—	—	—
	—	—	—
	—	—	—
	—	—	—
5	—	—	—
	—	—	—
6	—	—	—
	—	—	—
	—	—	—
	—	—	—
	—	—	—
7	—	—	—
	—	—	—

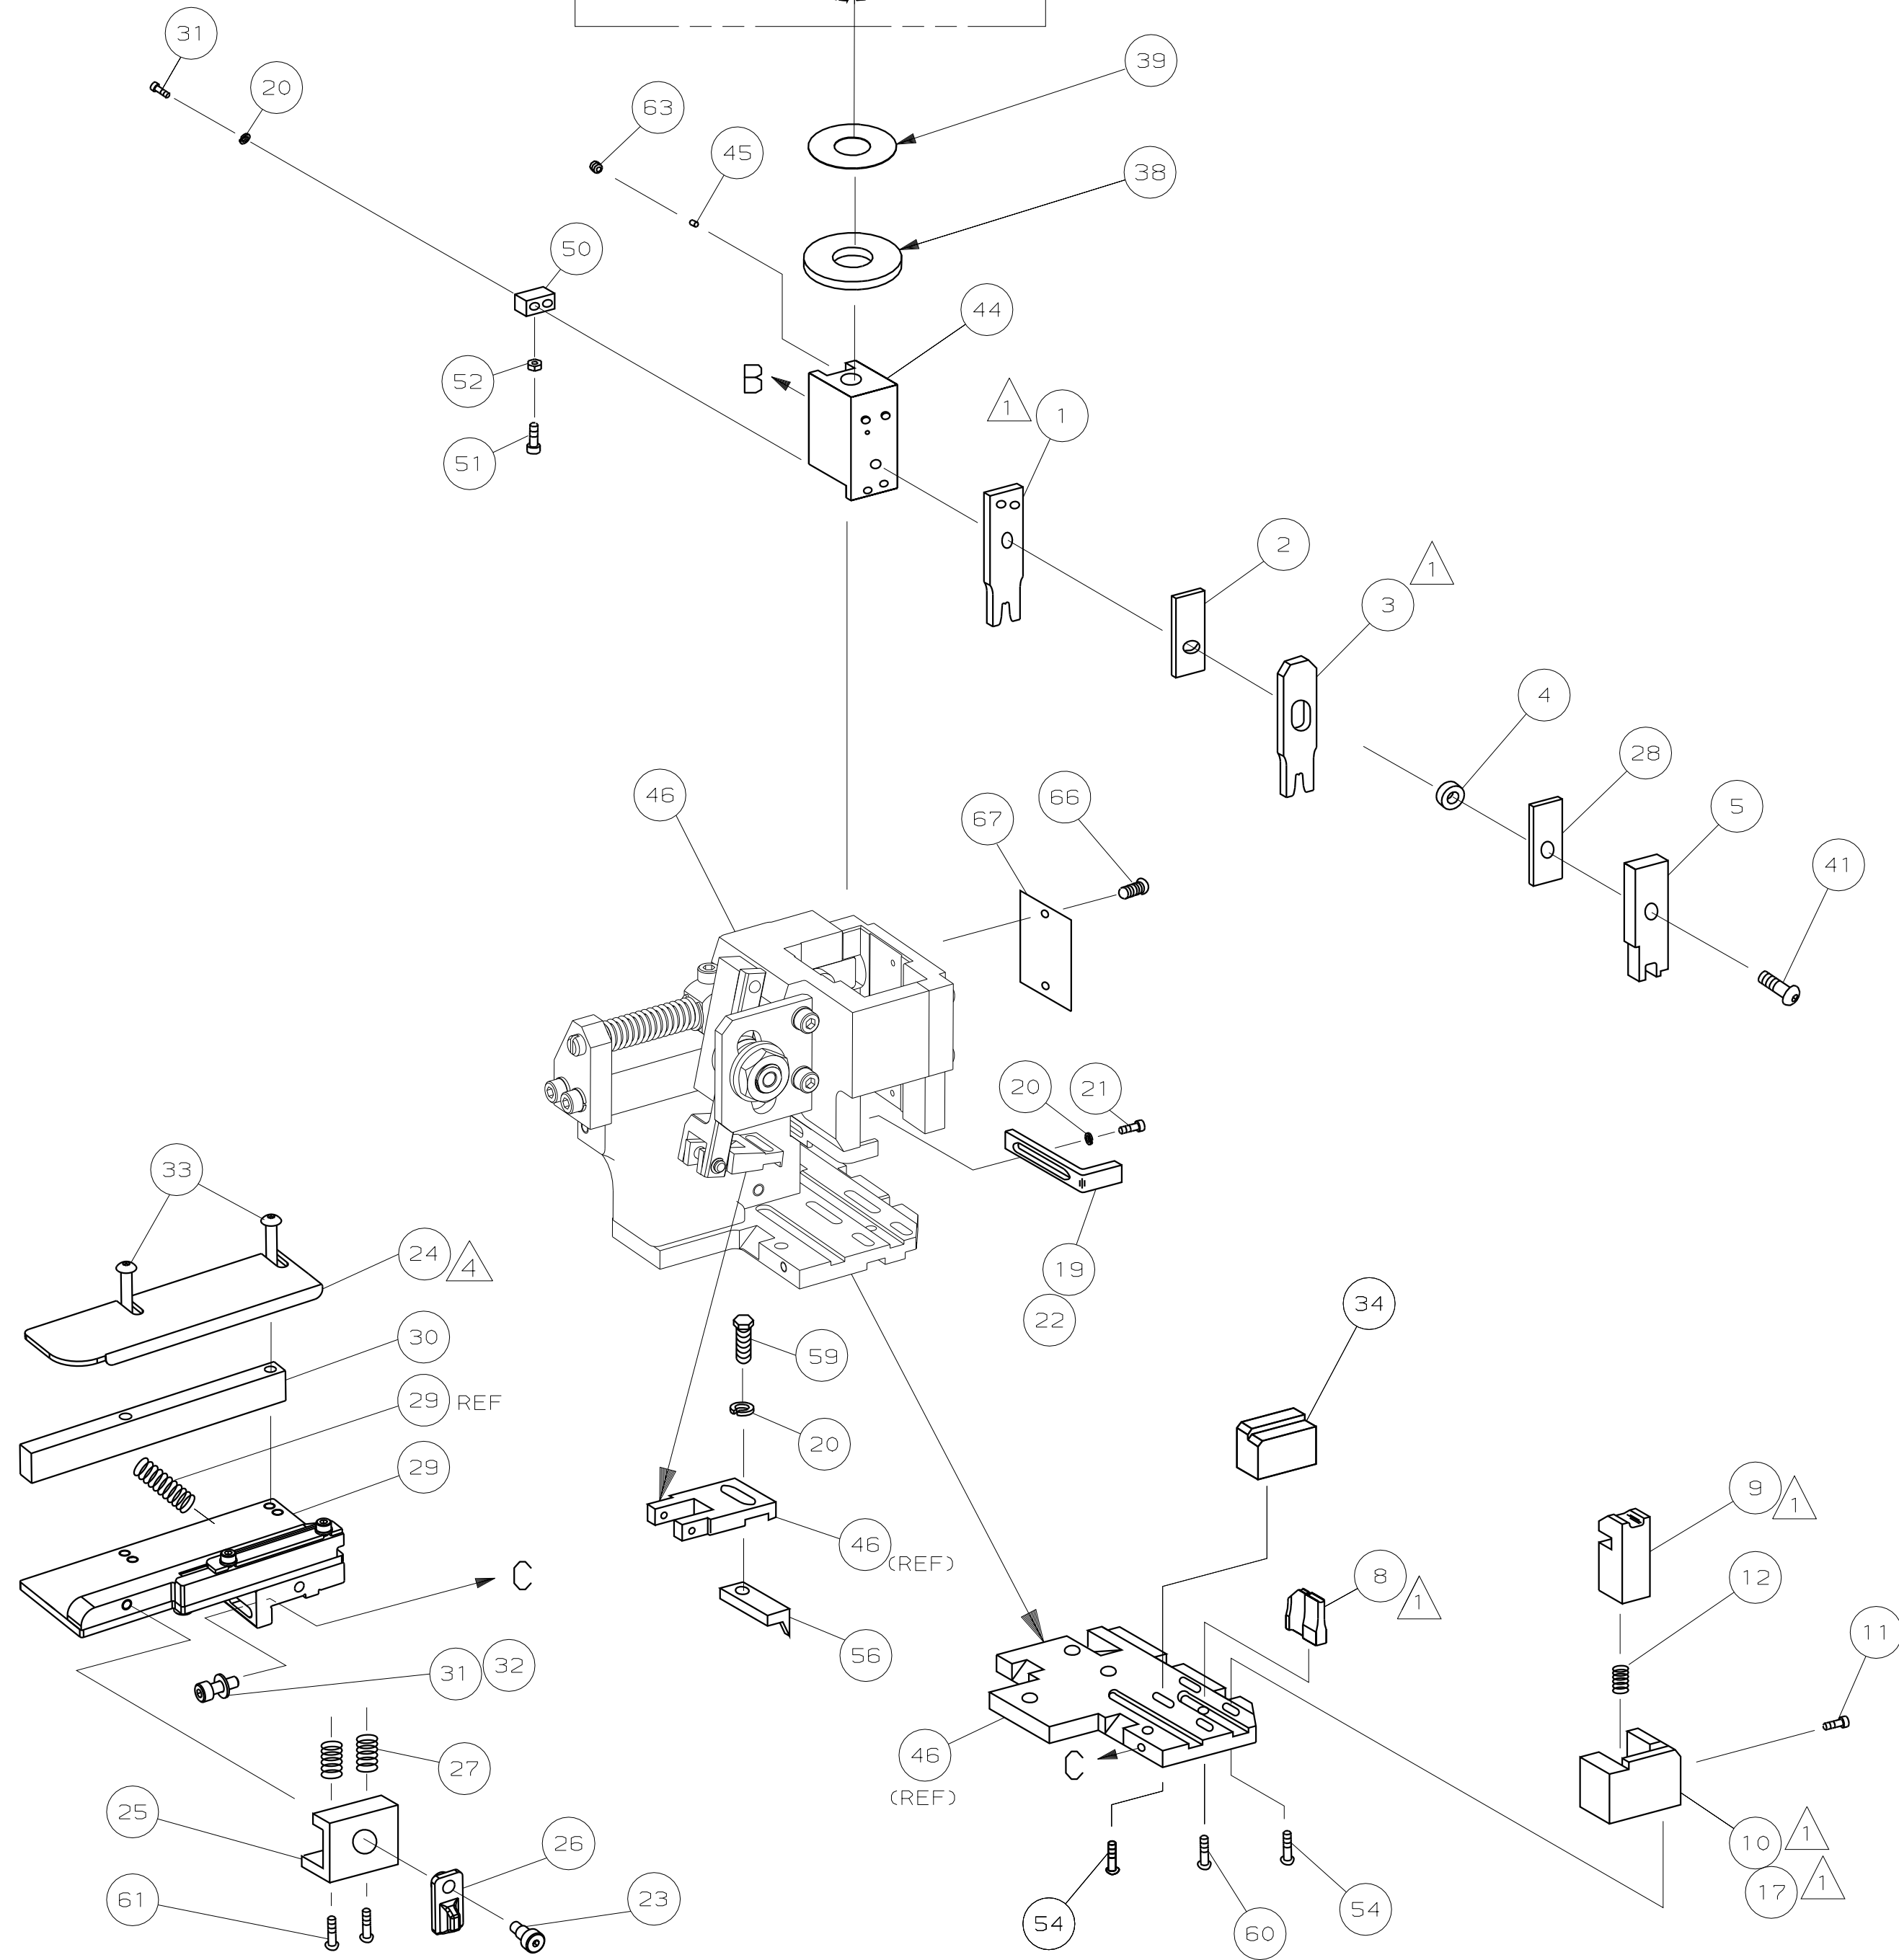

ON INSTALLATION, SET WIRE DISC TO LARGEST WIRE SIZE
SETTING. USE OF SETTINGS BELOW MIN REQ'D CRIMP
HEIGHT SETTING WILL CAUSE DAMAGE TO CRIMP TOOLING.

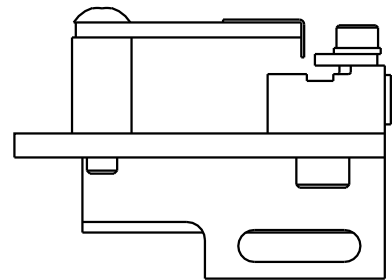

GUIDE OFF
INSULATION BARREL

[illegible]

		DIMENSIONS: mm [INCHES]	MATL	-	HT TR	-	FIN	-
		DO NOT SCALE PRINT.						
		TOLERANCES UNLESS OTHERWISE SPECIFIED:	DR	24JUN02	APP	24JUN02	AMP AMP Incorporated Harrisburg, PA 17105-3608	
		1 PLC DEC ±	M1.CLIFFORD			F.BACKHURST		
		2 PLC DEC ±	CHK	-	REL	31-07-02		
		3 PLC DEC ±				M1.CLIFFORD		
		ANGLES ±	NAME	FINE ADJ SIDE FD HD-I APPL				MACHINE REF
		SURF TEXTURE: ✓	SCALE	-	D	DWG NO	1528118	HD-I APPL
RK	FEB02	REMOVE BURRS, BREAK						
APP	DATE	SHARP EDGES R, 38 MAX						
		CAGE CODE						RESTRICTED TO
		00779	CUSTOMER AND ASSEMBLY DRAWING					-