

OPERATE CHARACTERISTICS

PICKUP	3 AMPS DC MAX
DROPOUT	1.2 AMP MIN.
CONTINUOUS	16 AMP MAX

CONTACT RATING .25 AMP 28 VDC




LAMP LOAD .080 AMP 28 VDC

VIBRATION 10 G'S TO 500 HZ


ALTITUDE 50,000 FT. MAX

TEMP. -55°C TO +71°C

MAX. WEIGHT 1.25 OZ.

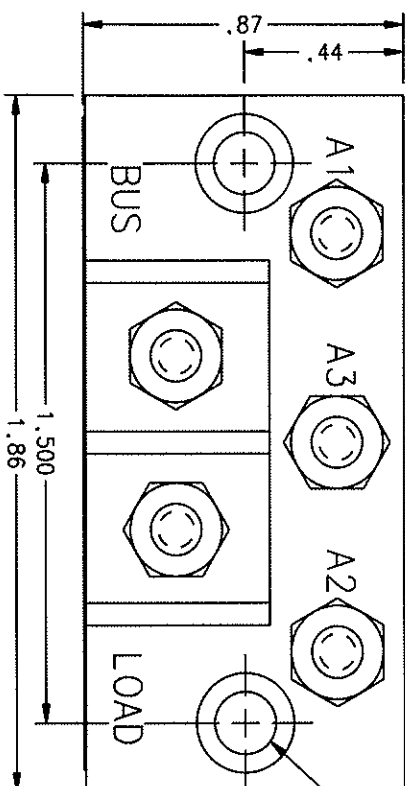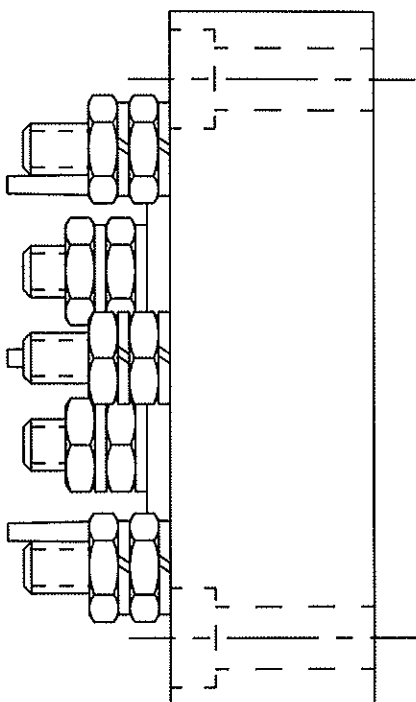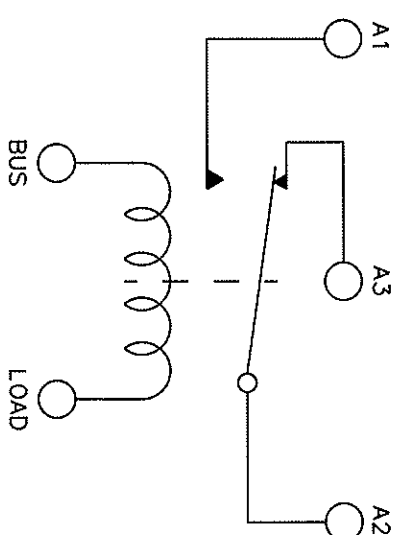

— .166 DIA HOLE, C'BORE
 .265 DIA X .12 DEEP
 2 MTG HOLES

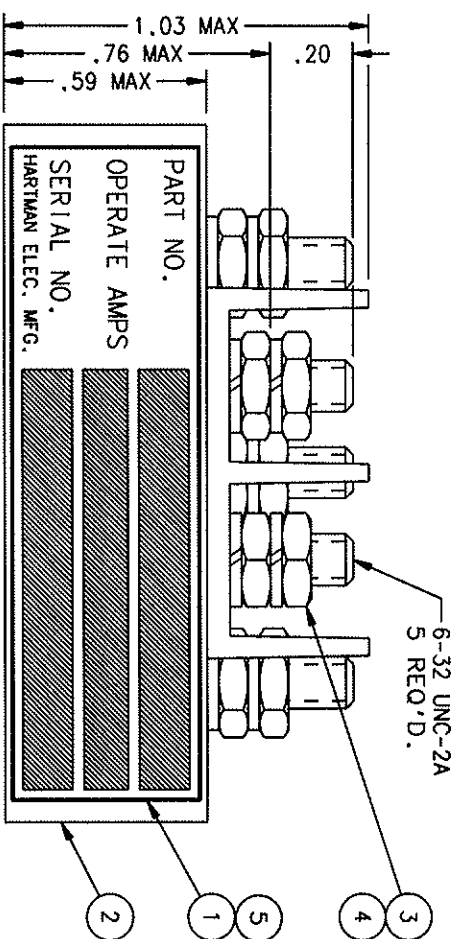

5	1	39529-024	OVERLAY - NAME	PLATE			
4	5	51806-014	WASHER - LOCK	NO.6	SPLIT		BRONZE
3	5	50406-034	NUT -	6-32 X 1/4 X 5/64	HEX		BRASS
2	1	35893-020	RELAY ASSEMBLY -	PRIMARY			
1	1	34246-001	PLATE -	NAME			

FIND NO	QTY	PART OR IDENTIFYING NO
---------	-----	------------------------

CONDITIONS ARE IN THESE
FOR PARTS OF

2 PL DEC.	3 PL DEC.	ANGL ES
06	010	1

MATERIAL

DR BY	RLS	00/02/25
CHK BY	PS	00/02/25

ENGR	5118	02/03/03
------	------	----------

NEG	CA	26/03/03
-----	----	----------

RELEASE

CONFIR. NO.

GOVT APPVL

HARTMAN ELECTRICAL MANUFACTURING
MANSELD, OHIO

RELAY - CURRENT
INDICATOR

SIZE	CODE IDENT	DWG NO.
------	------------	---------

C	74063	Q-50Z
---	-------	-------

SCALE	NONE	SHEET
-------	------	-------