

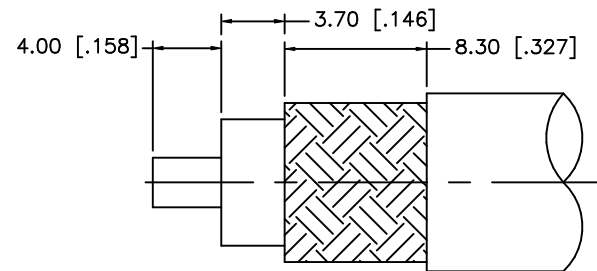
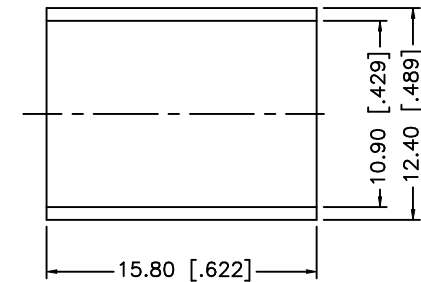


REV.	DATE	DESCRIPTION
NC	01/23/07	INITIAL RELEASE

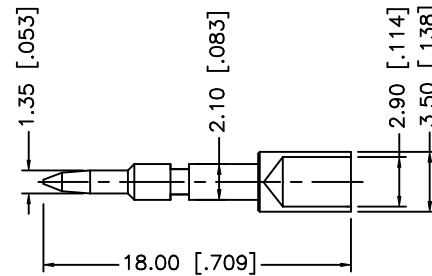

RECOMMENDED CABLE STRIPPING DIM'S

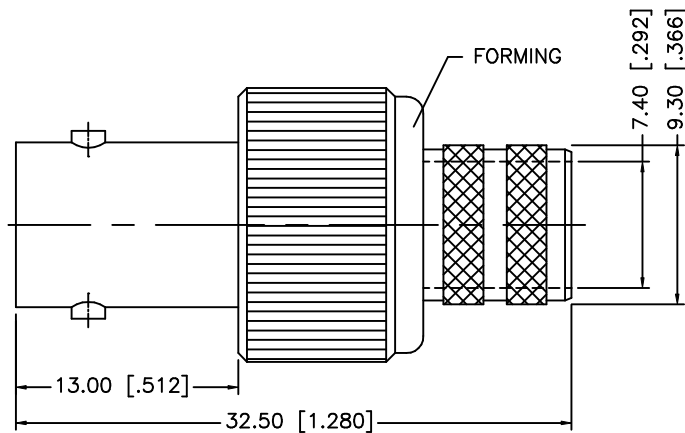

NOTE:

1. CRIMPED FERRULE HEX CRIMP SIZE .429"
2. CRIMPED CONTACT PIN HEX CRIMP SIZE .118"

					UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS. DIMENSIONS IN [] ARE IN INCHES AND FOR CUSTOMER REFERENCE ONLY. UNLESS OTHERWISE SPECIFIED TOLERANCES FOR MILLIMETERS ARE: 0.5 – 8mm ± 0.20mm 8 – 30mm ± 0.40mm 30 – 120mm ± 0.50mm UNLESS OTHERWISE SPECIFIED TOLERANCES FOR INCHES ARE: .020 – .315 = ± 0.007" .315 – 1.180 = ± 0.015" 1.180 – 4.724 = ± 0.020" DO NOT SCALE DRAWING	APPROVALS		DATE		Amphenol Connex			
8						DRAWN	G.R.S.	01/23/07					
7						CHECKED							
6						ISSUED			PART DESCRIPTION BNC REVERSE POLARITY CRIMP JACK (FOR LMR400, BELDEN 8214, 9913, 9914)				
5						SHEET	1 OF 1						
4	FERRULE	COPPER	NICKEL	1				PART NO. 112603RP					
3	CONTACT PIN	BRASS	GOLD	1									
2	INSULATOR	TEFLON	NATURAL	1				DWG. NO. 112603RP.DWG REV. NC SIZE A SCALE NA					
1	BODY	BRASS	NICKEL	1									
DESCRIPTION		MATERIAL	FINISH	QTY		CAD FILE C:/112/112603RP.DWG							