

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

Part Number:

0761551308

Status:


Active

Overview:

Impact™ Backplane Connector and Cable Assembly System

Description:

Impact™ 100 Ohm 4 Pair Vertical Backplane Header, Unguided, Open Endwall, 6 Columns, 72 Circuits, Pin Length 5.50mm, Plated Through Hole Dimension 0.39mm, Lead-Free

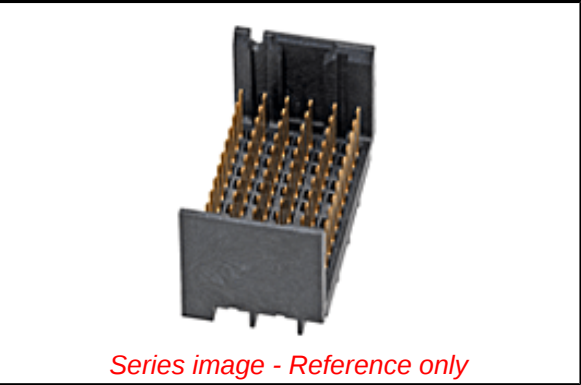

|                                                              |                                                               |
|--------------------------------------------------------------|---------------------------------------------------------------|
| Documents:                                                   |                                                               |
| <a href="#">3D Model</a>                                     | <a href="#">Application Specification AS-76060-9999 (PDF)</a> |
| <a href="#">Drawing (PDF)</a>                                | <a href="#">Packaging Specification PK-70873-7701 (PDF)</a>   |
| <a href="#">Product Specification PS-76060-999 (PDF)</a>     | <a href="#">Test Summary TS-76160-0001 (PDF)</a>              |
| <a href="#">Application Specification AS-76060-990 (PDF)</a> | <a href="#">RoHS Certificate of Compliance (PDF)</a>          |
| <a href="#">Application Specification AS-76060-994 (PDF)</a> |                                                               |

|                                |                                                       |
|--------------------------------|-------------------------------------------------------|
| General                        |                                                       |
| Product Family                 | Backplane Connectors                                  |
| Series                         | 76155                                                 |
| Application                    | Conventional                                          |
| Application Tooling Documents  | TM-622018799                                          |
| Component Type                 | PCB Header                                            |
| Overview                       | Impact™ Backplane Connector and Cable Assembly System |
| Product Name                   | Impact™                                               |
| UPC                            | 884982747814                                          |
| Physical                       |                                                       |
| Circuits (Loaded)              | 72                                                    |
| Circuits (maximum)             | 72                                                    |
| Color - Resin                  | Black                                                 |
| Durability (mating cycles max) | 200                                                   |
| First Mate / Last Break        | No                                                    |
| Guide to Mating Part           | No                                                    |
| Keying to Mating Part          | None                                                  |
| Material - Metal               | High Performance Alloy (HPA)                          |
| Material - Plating Mating      | Gold                                                  |
| Material - Plating Termination | Tin                                                   |
| Material - Resin               | High Temperature Thermoplastic                        |
| Net Weight                     | 1.618/g                                               |
| Number of Columns              | 6                                                     |
| Number of Pairs                | 4                                                     |
| Number of Rows                 | 12                                                    |
| Orientation                    | Vertical                                              |
| PC Tail Length                 | 1.40mm                                                |
| PCB Locator                    | No                                                    |
| PCB Retention                  | None                                                  |
| PCB Thickness - Recommended    | 1.00mm                                                |
| Packaging Type                 | Tray                                                  |
| Pitch - Mating Interface       | 1.90mm                                                |
| Pitch - Termination Interface  | 1.90mm                                                |
| Plating min - Mating           | 0.762µm                                               |
| Polarized to PCB               | No                                                    |
| Stackable                      | No                                                    |
| Temperature Range - Operating  | -55°C to +85°C                                        |
| Termination Interface: Style   | Through Hole - Compliant Pin                          |
| Electrical                     |                                                       |
| Current - Maximum per Contact  | 0.75A                                                 |

EU ELV

Not Relevant

EU RoHS

China RoHS

Compliant

REACH SVHC

Not Contained Per

-ED/79/2015 (17

December 2015)

Halogen-Free

Status

Low-Halogen

Need more information on product

environmental compliance?

Email [productcompliance@molex.com](mailto:productcompliance@molex.com)

Please visit the [Contact Us](#) section for any

non-product compliance questions.

China ROHS

Green Image

ELV

Not Relevant

Search Parts in this Series

76155 Series

Mates With

76160 Impact™ 100 Ohm Daughtercard

Use With

75234 Backplane Free Standing Guide Pin

Application Tooling | FAQ

Tooling specifications and manuals are found by selecting the products below. Crimp Height Specifications are then contained in the Application Tooling Specification document.

Global

Description

Product #

Backplane Press-In

0622018679

Tool for 4-Pair by 6-Column Assemblies

|                                    |                                           |                     |                    |
|------------------------------------|-------------------------------------------|---------------------|--------------------|
| Data Rate                          | 25.0 Gbps                                 | Backplane Insertion | <u>0621005800</u>  |
| Impedance                          | 100#                                      | Tool for Signal     | Contact            |
| Shield Type                        | N/A                                       | Backplane Header    | <u>0621009610</u>  |
| Shielded                           | No                                        | Removal Tool for    | GbX® U-Series, GbX |
| Voltage - Maximum                  | 30V AC (RMS)/DC                           | I-Trac™, Impact™,   | or Z-PACK Tinman*  |
| <b>Solder Process Data</b>         |                                           |                     |                    |
| Lead-freeProcess Capability        | N/A                                       |                     |                    |
| <b>Material Info</b>               |                                           |                     |                    |
| <b>Reference - Drawing Numbers</b> |                                           |                     |                    |
| Application Specification          | AS-76060-990, AS-76060-994, AS-76060-9999 |                     |                    |
| Packaging Specification            | PK-70873-7701                             |                     |                    |
| Product Specification              | PS-76060-999                              |                     |                    |
| Sales Drawing                      | SD-76155-001                              |                     |                    |
| Symbol/Footprint Data              | SYM-76155-1308                            |                     |                    |
| Test Summary                       | TS-76160-0001                             |                     |                    |

This document was generated on 06/09/2016

PLEASE CHECK [WWW.MOLEX.COM](http://WWW.MOLEX.COM) FOR LATEST PART INFORMATION