

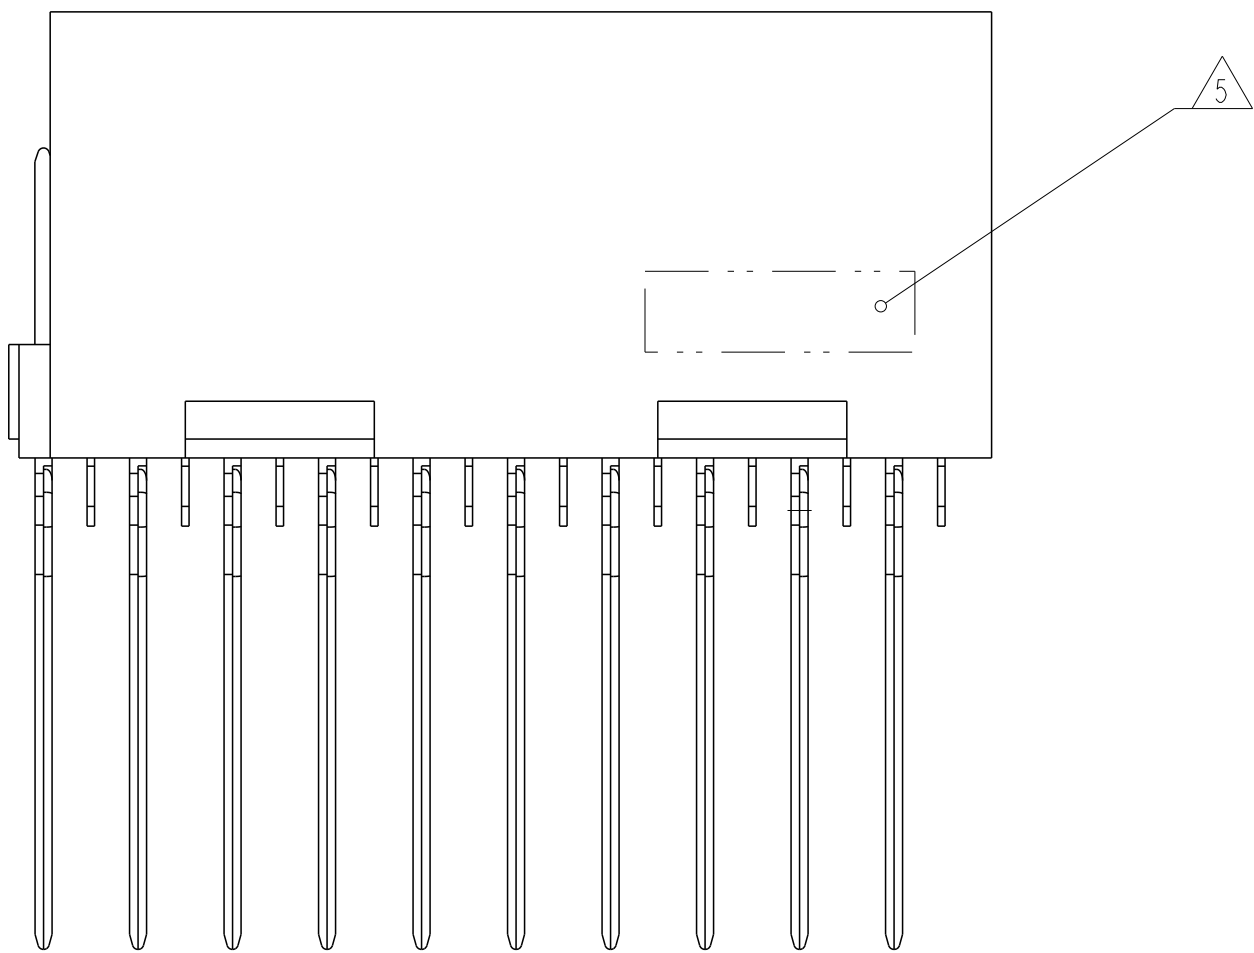
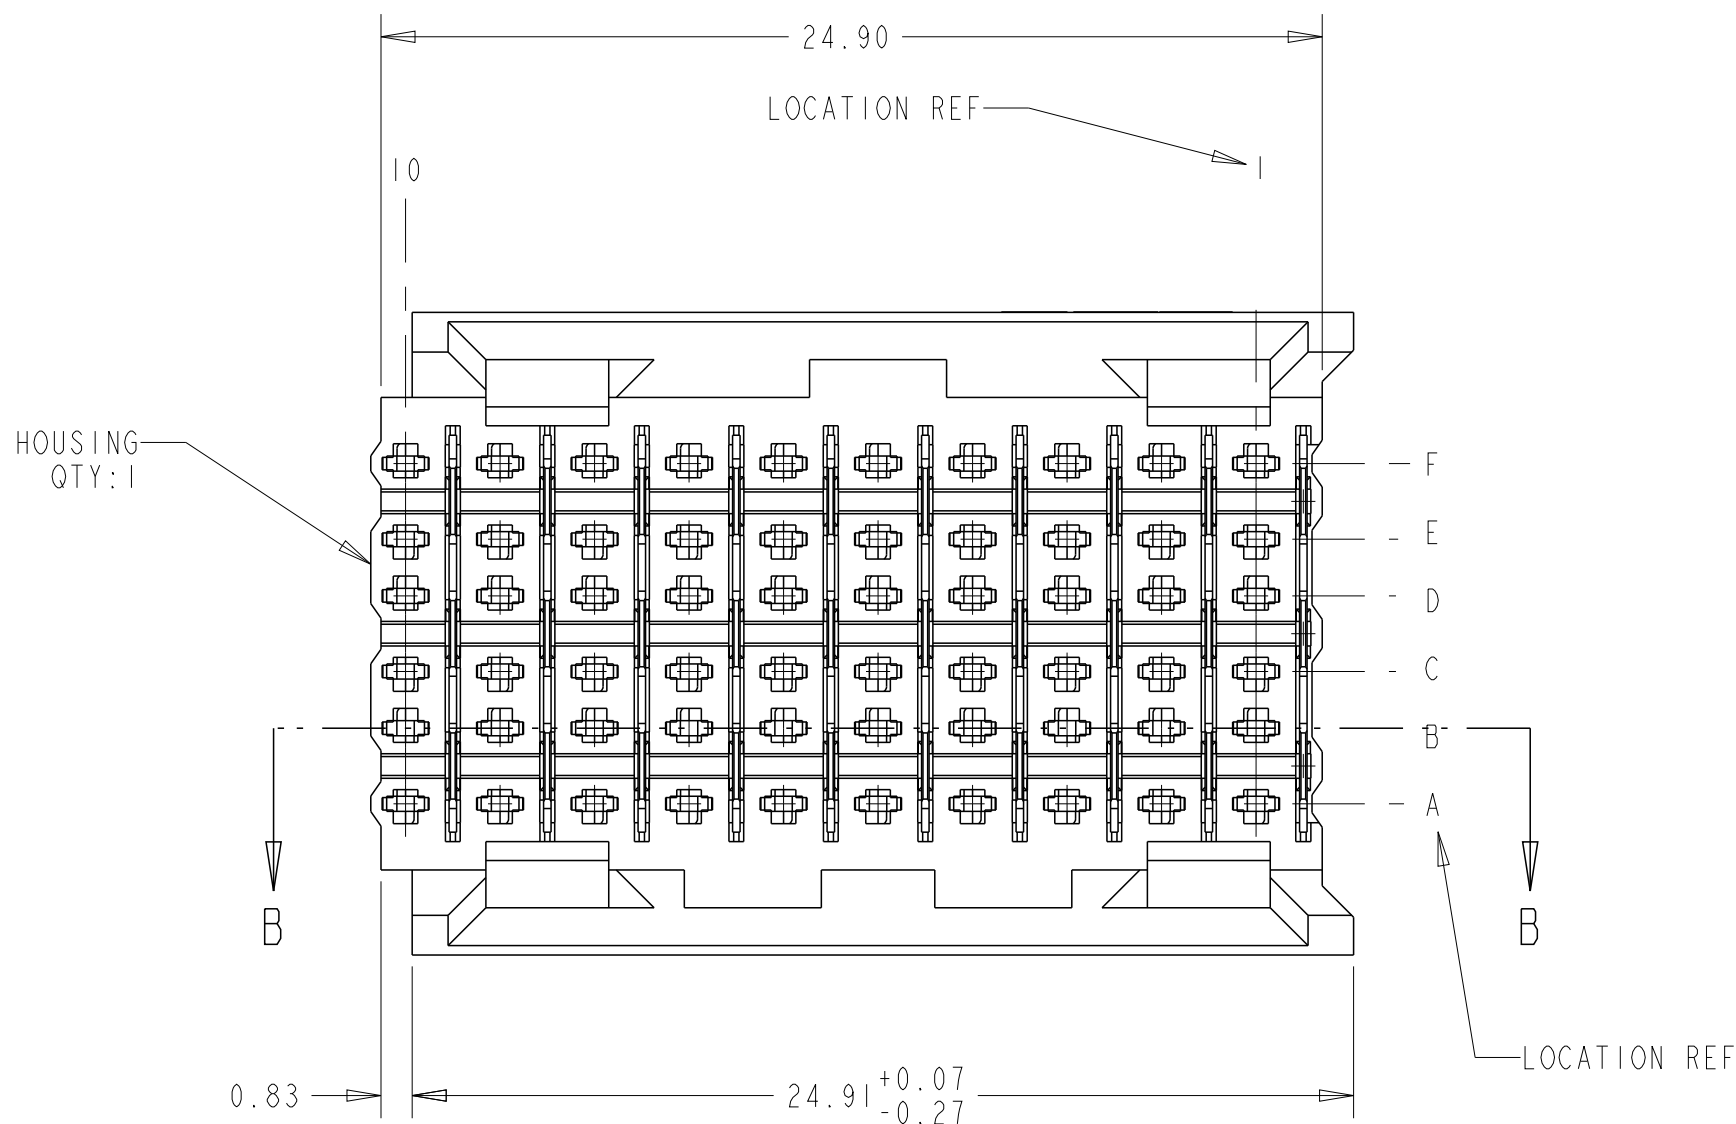
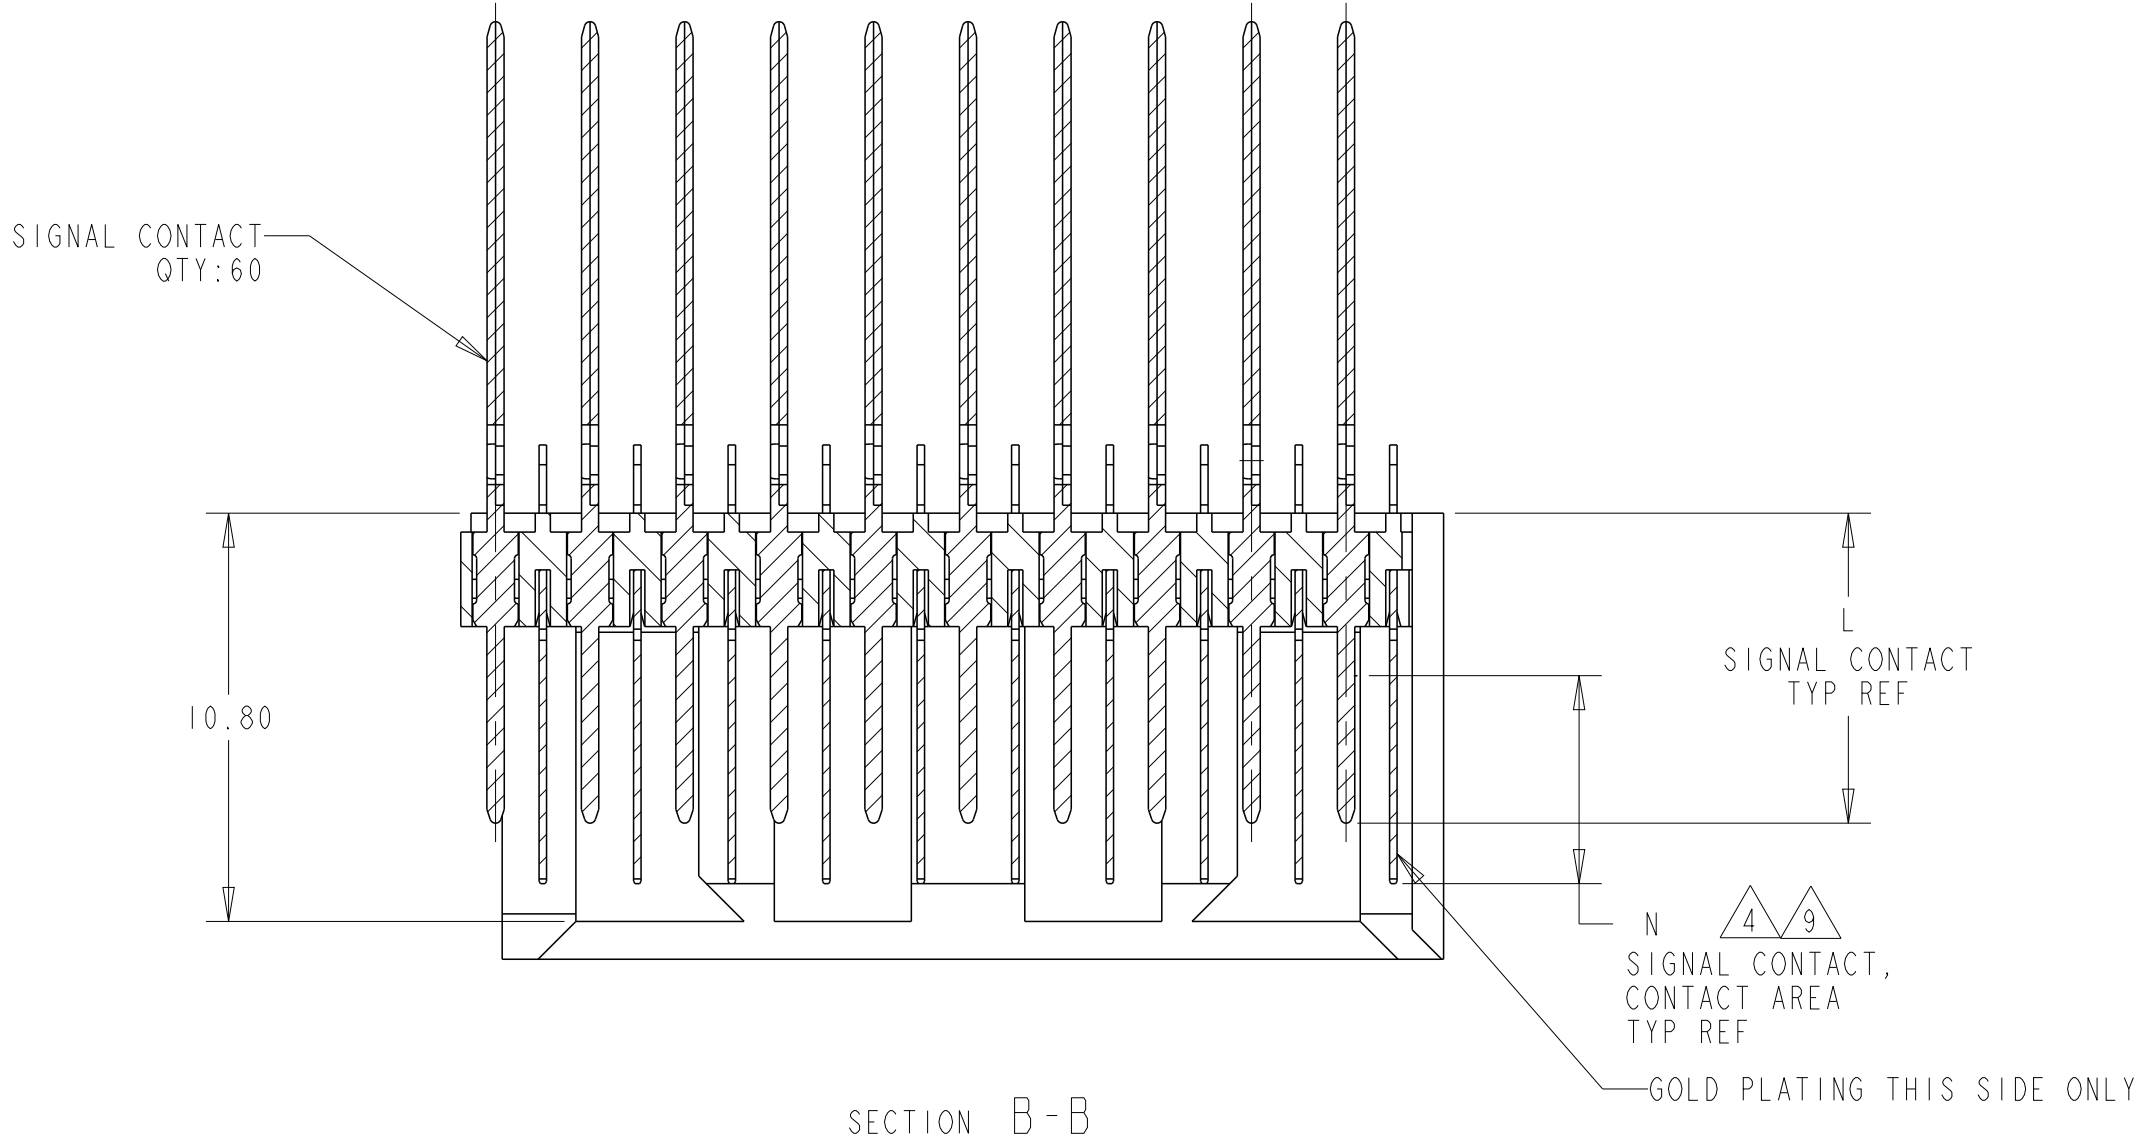


LOC		DIST		REVISIONS				
P	LYR	DESCRIPTION			DATE	DWN	APVD	
	A	REVISED PER ECO-12-011334			28SEP2012	KH	JE	

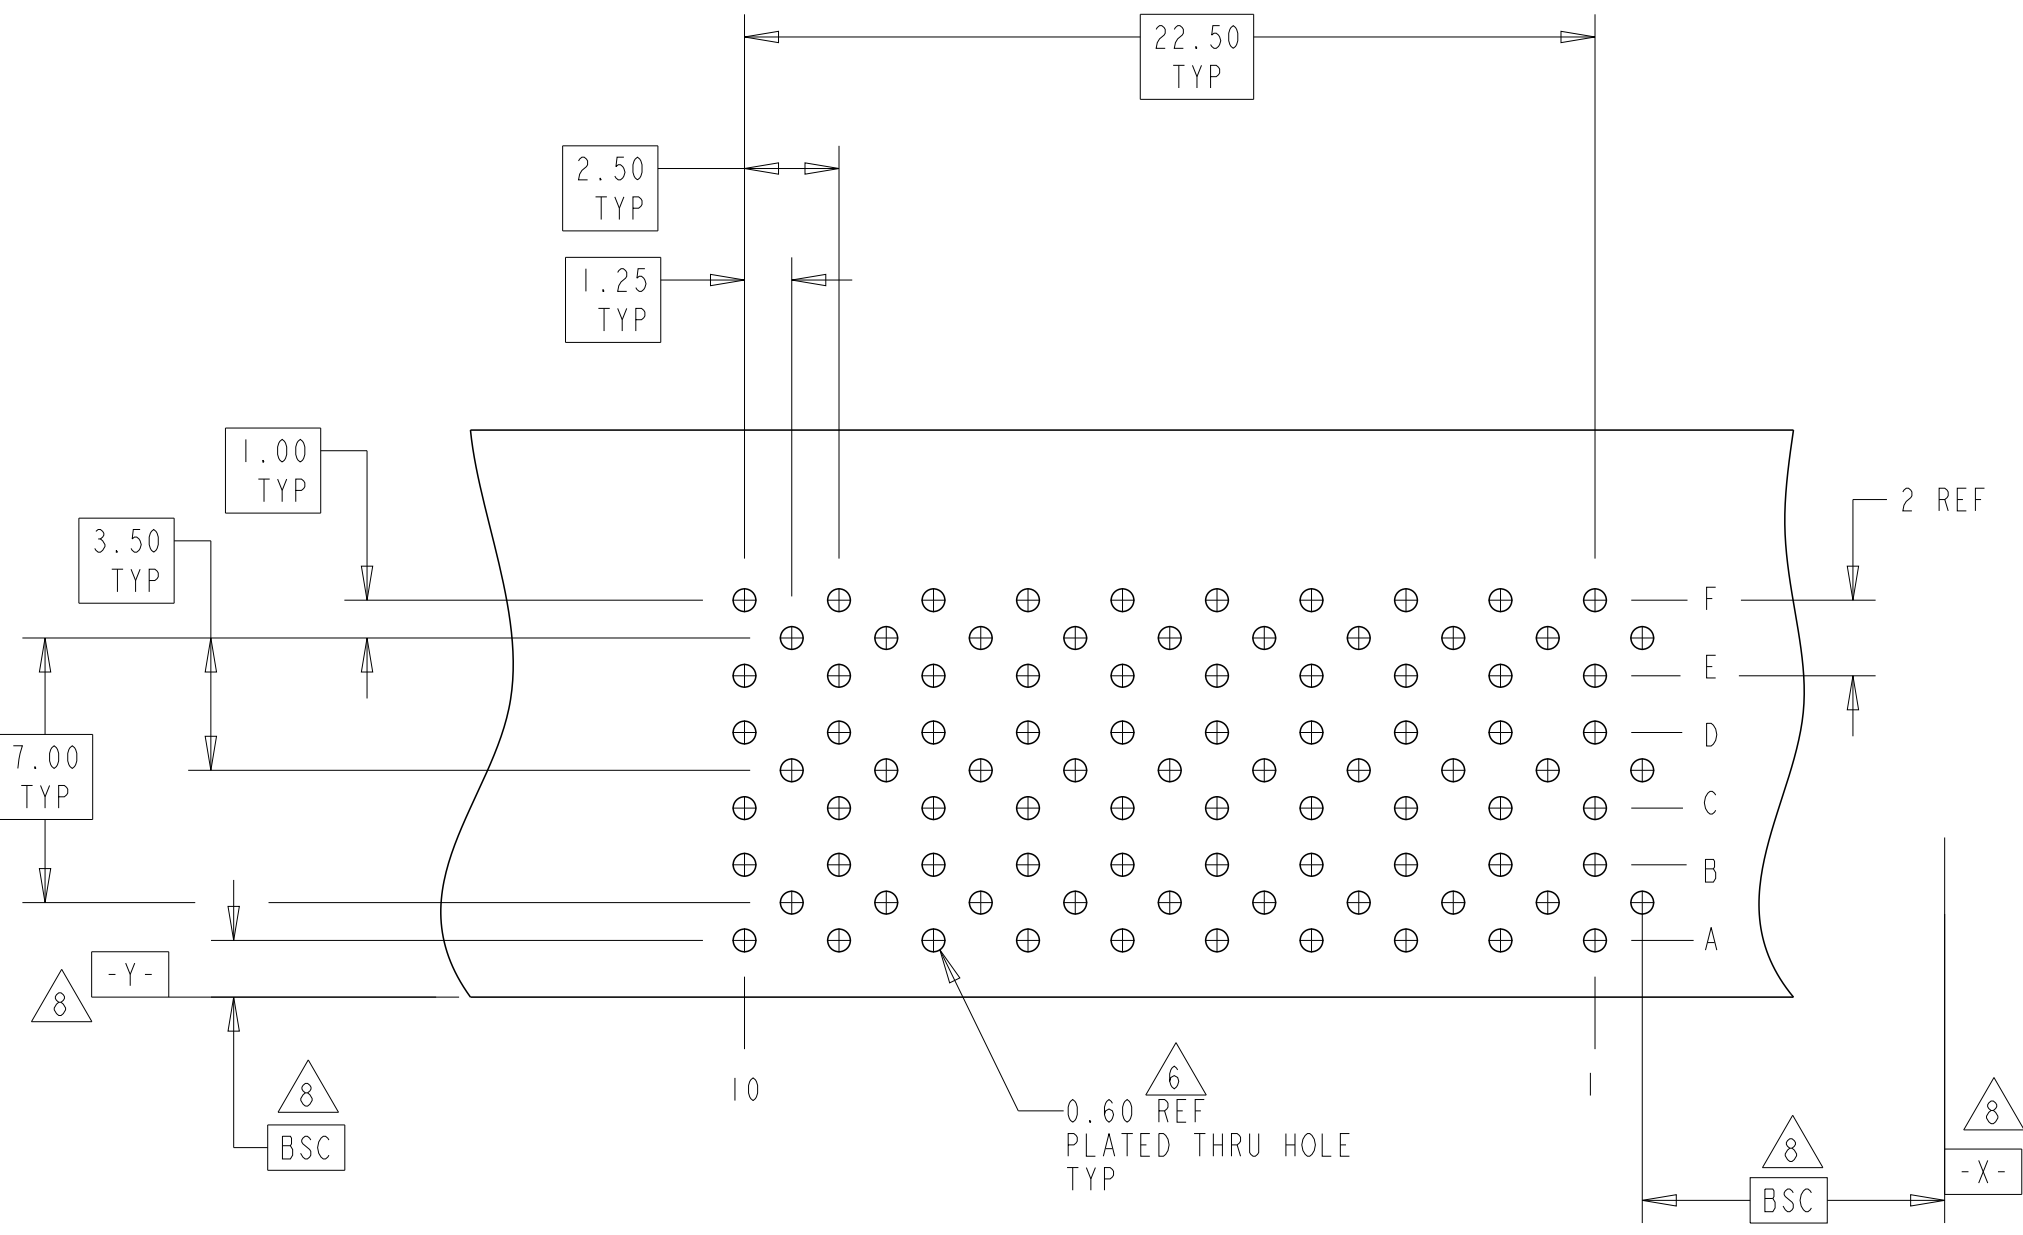


-  PHOSPHOR BRONZE
-  LCP, UL94V-0
-  FINISH:
CONTACT MATING AREA MEETS THE PERFORMANCE REQUIREMENTS OF
TE CONNECTIVITY PRODUCT SPECIFICATION 108-1957; BASED ON
TELCORDIA GR-1217-CORE; APPLICATIONS IN UNCONTROLLED ENVIRONMENTS.
COMPLIANT PIN AREA: 0.5µm MIN MATTE TIN OVER BASE PLATING.
-  CONNECTOR MARKED WITH PART NUMBER AND DATE CODE
-  REFERENCE APPLICATION SPEC 114-13020 FOR RECOMMENDED
PLATED THRU HOLE DIAMETER AND PLATING THICKNESS.
-  APPLICATION SEATING HEIGHT TO PRINTED CIRCUIT BOARD
-  DATUMS AND BASIC DIMENSIONS ESTABLISHED BY CUSTOMER
-  CONTACT AREA LUBRICATED WITH BELLCORE APPROVED LUBRICANT
TECHNICAL REFERENCE: GR-1217-CORE, ISSUE 1, NOVEMBER 1995

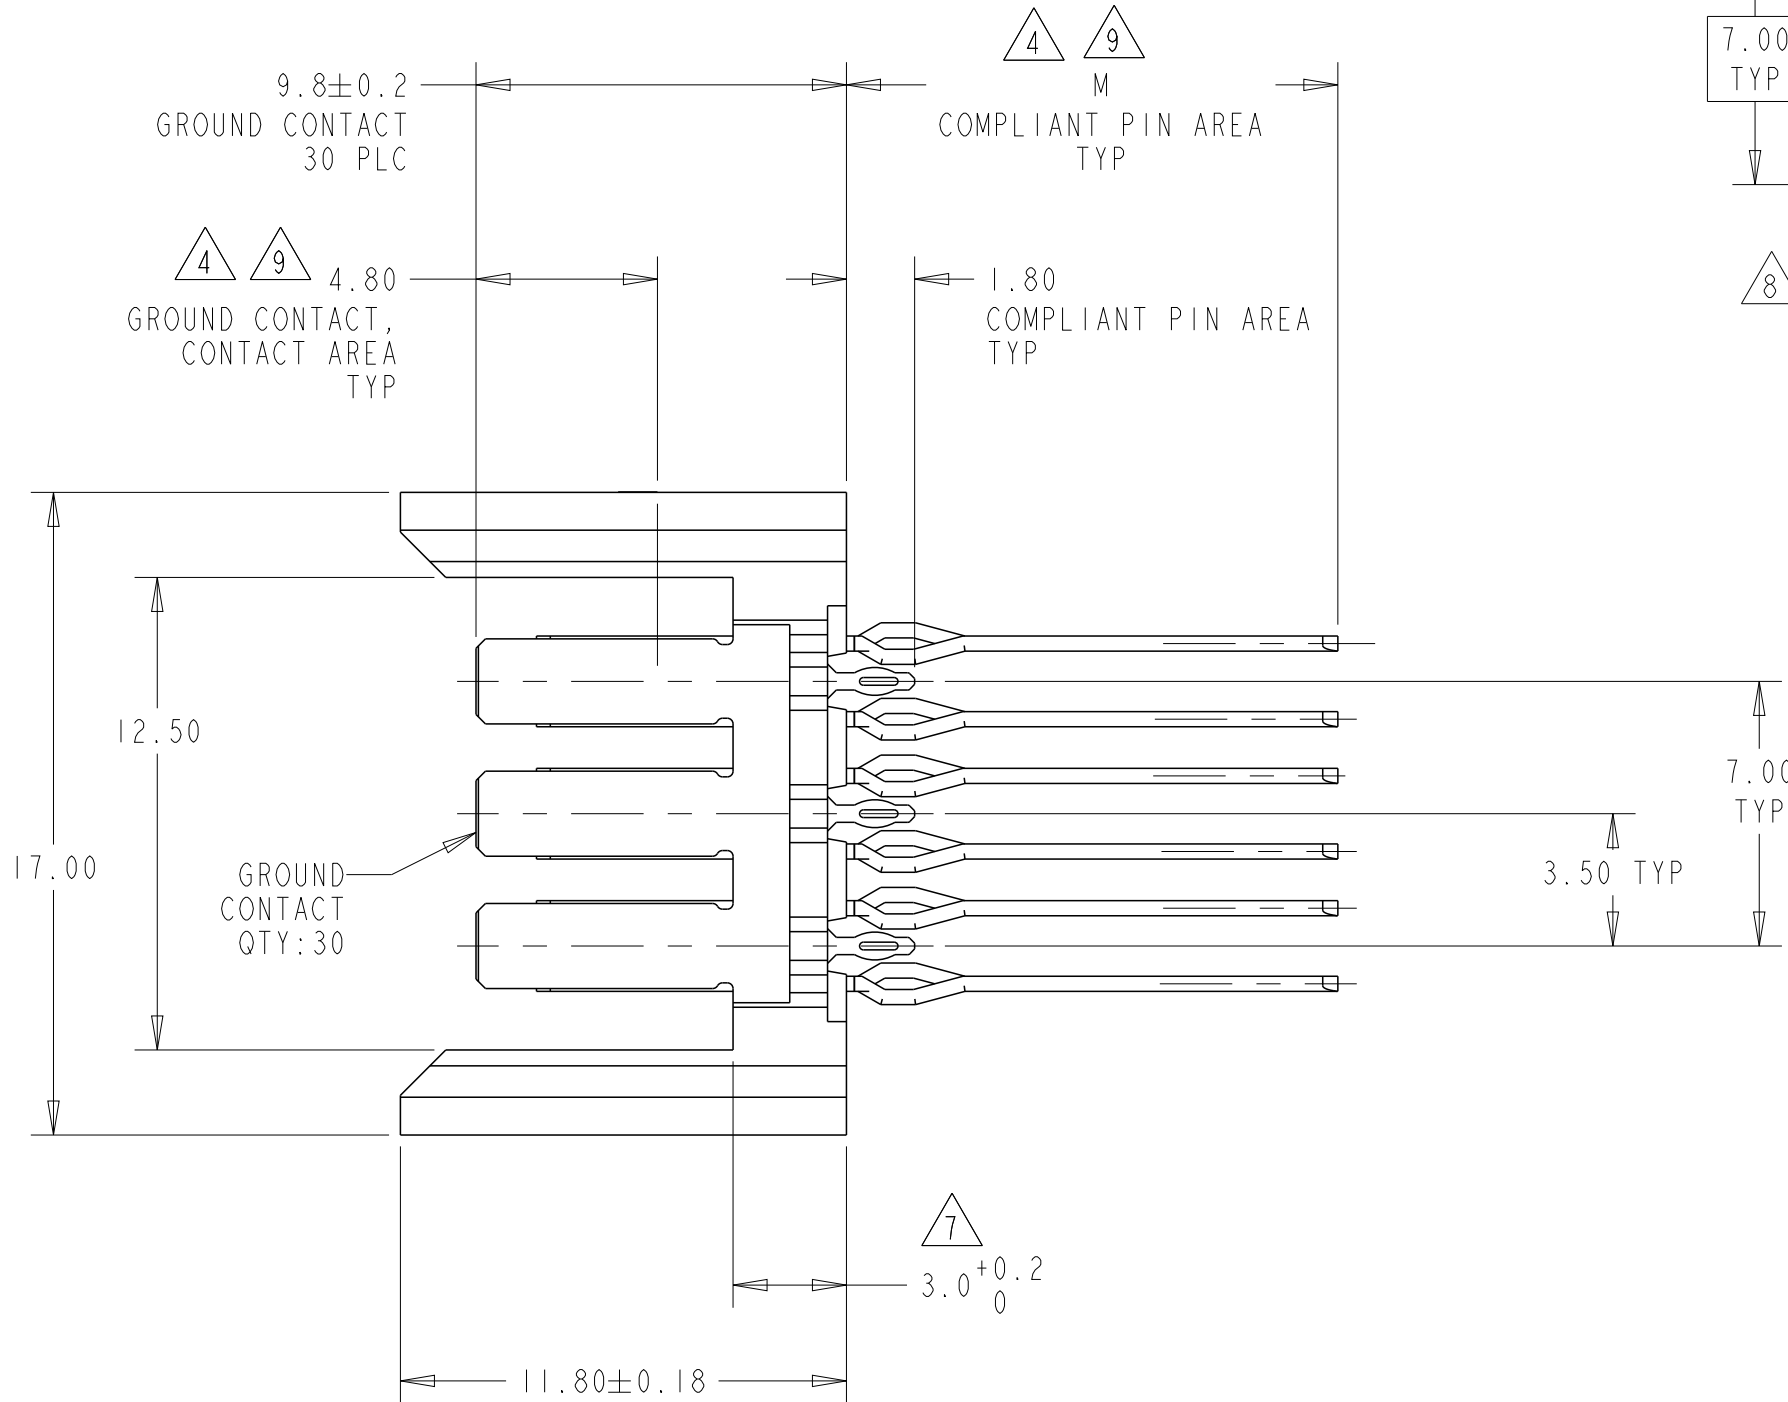

RECOMMENDED
PRINTED CIRCUIT BOARD
LAYOUT
COMPONENT SIDE OF PRINTED CIRCUIT BOARD

5.50	14.50	9.7	5120679-2
5.50	13.00	8.2	5120679-1
N	M	L	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.			DWN B. CARBO	07DEC04	 TE Connectivity						
DIMENSIONS:			CHK R. PATTERSON	07DEC04							
mm	TOLERANCES UNLESS OTHERWISE SPECIFIED:			APVD R. PATTERSON	07DEC04	NAME	HEADER ASSEMBLY, 60 POSITION, 6 ROW, FEED THROUGH, BACKPLANE CONNECTOR, Z-PACK HS3				
	0 PLC ±			PRODUCT SPEC		SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO		
	1 PLC ±			APPLICATION SPEC							
	2 PLC ±0.13										
	3 PLC ±0.05										
MATERIAL	4 PLC ±					A1	00779	C=5120679			
	ANGLES FINISH										
HOUSING: 	CONTACTS: 			SIGNAL CONTACT: 		Customer Drawing					
						SCALE	5:1	SHEET	1 OF 1	REV	A