

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

Part Number: [0850030165](#)
Status: **Active**
Overview: [din_41612](#)
Description: 2.54mm (.100") Pitch DIN 41612 Header, Style C, Vertical, Through Hole, 0.6µm (24µ") Selective Gold (Au), 64 Circuits, Lead free

Documents:

[3D Model](#) [Product Specification PS-85003-0001 \(PDF\)](#)
[Drawing \(PDF\)](#) [RoHS Certificate of Compliance \(PDF\)](#)

Agency Certification

CSA LR19980
UL E29179

General

Product Family Backplane Connectors
Series [85003](#)
Application Daughtercard
Component Type PCB Header
Overview [din_41612](#)
Product Name IEC 603-2/DIN 41612
Style C


Physical

Circuits (Loaded) 64
Circuits (maximum) 96
Durability (mating cycles max) 400
First Mate / Last Break No
Flammability 94V-0
Guide to Mating Part No
Keying to Mating Part Yes
Number of Columns 16
Number of Pairs Open Pin Field
Number of Rows 3
Orientation Right Angle
PC Tail Length (in) 0.157 In
PC Tail Length (mm) 4.00 mm
PCB Locator No
PCB Retention Yes
PCB Thickness Recommended (in) 0.062 In
PCB Thickness Recommended (mm) 1.60 mm
Packaging Type Tray
Pitch - Mating Interface (in) 0.100 In
Pitch - Mating Interface (mm) 2.54 mm
Pitch - Term. Interface (in) 0.100 In
Pitch - Term. Interface (mm) 2.54 mm
Polarized to PCB Yes
Stackable No
Temperature Range - Operating -55°C to +125°C
Termination Interface: Style Through Hole

Electrical

Current - Maximum per Contact 2.5A
Data Rate 622.0 Mbps
Voltage - Maximum 250V AC (RMS)

Material Info

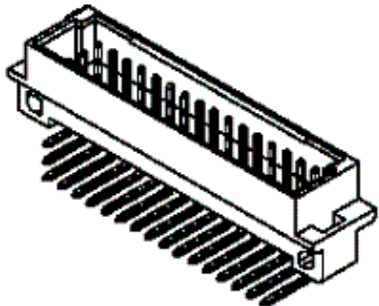

Series
image - Reference only

EU RoHS

**ELV and RoHS
Compliant**
REACH SVHC
Not Reviewed
**Halogen-Free
Status**
Not Reviewed

China RoHS



**Need more information on product
environmental compliance?**

Email productcompliance@molex.com
For a multiple part number RoHS Certificate of
Compliance, [click here](#)

Please visit the [Contact Us](#) section for any
non-product compliance questions.

Search Parts in this Series
[85003Series](#)

Mates With
[85042](#) DIN 41612 Receptacle. [85052](#) DIN
41612 Header

Reference - Drawing Numbers

Product Specification
Sales Drawing

PS-85003-0001
SD-85003-0165

This document was generated on 05/17/2010

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

A = 64 STANDARD CONTACTS STRAIGHT L = 4

MARKING	STANDARD
PERFORMANCE LEVEL	G2/0 = CONTACT AREA LEVEL2 / TERMINATION TIN
FLUX PROOF	NO
FIXING CLIP	NO
DIMENSIONS	SD-85003-0001 SHT 3

A	G2/0	a1-32, c1-32
CONTACT SYMBOL	PERFORMANCE LEVEL	CONTACT POSITION NUMBER

EC. NO. 1 2004-XXXX DRAWN: 05/09/03 C CHK'D: 09/09/03 APPR'D: 09/09/03		QUALITY SYMBOLS MAJOR CRITICAL	GENERAL TOLERANCES (UNLESS SPECIFIED) <table><tr><td></td><td>mm</td><td>INCH</td></tr><tr><td>4 PLACES</td><td>± 0.1</td><td>$\pm .004$</td></tr><tr><td>3 PLACES</td><td>± 0.1</td><td>$\pm .004$</td></tr><tr><td>2 PLACES</td><td>± 0.1</td><td>$\pm .004$</td></tr><tr><td>1 PLACE</td><td>± 0.1</td><td>$\pm .004$</td></tr></table>			mm	INCH	4 PLACES	± 0.1	$\pm .004$	3 PLACES	± 0.1	$\pm .004$	2 PLACES	± 0.1	$\pm .004$	1 PLACE	± 0.1	$\pm .004$	SCALE DRAWN BY & DATE S.S. 23/04/01 CHECKED BY & DATE G.L. 23/04/01 APPROVED BY & DATE G.L. 23/04/01	DESIGN UNITS ☒ mm ☐ INCH	 THIRD ANGLE PROJECTION	DIMENSIONS: ☐ mm ☐ INCH ☐ mm ONLY ☐ INCH ☐ mm ☐ INCH ONLY		SHT REVISE ON CAD ONLY	REV. CAD ONLY
	mm	INCH																								
4 PLACES	± 0.1	$\pm .004$																								
3 PLACES	± 0.1	$\pm .004$																								
2 PLACES	± 0.1	$\pm .004$																								
1 PLACE	± 0.1	$\pm .004$																								
C		DESCRIPTION	TITLE: 96 POS MOLEX CONNECTOR ACCORDING DIN 4162 STYLE C CONTACTS ARRANGEMENT (STRAIGHT)		MOLEX MOLEX INCORPORATED		CAD FILENAME SD-85003-0165.50		MATERIAL NO. 85003-0165	DRAWING NO. SD-85003-0165	SHEET NO. 1 OF 1															
REV		DRAFT HEREIN APPLICABLE MUST REMAIN WITHIN DIMENSIONS	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION.		SIZE D		SIZE D		SIZE D		SIZE D															