
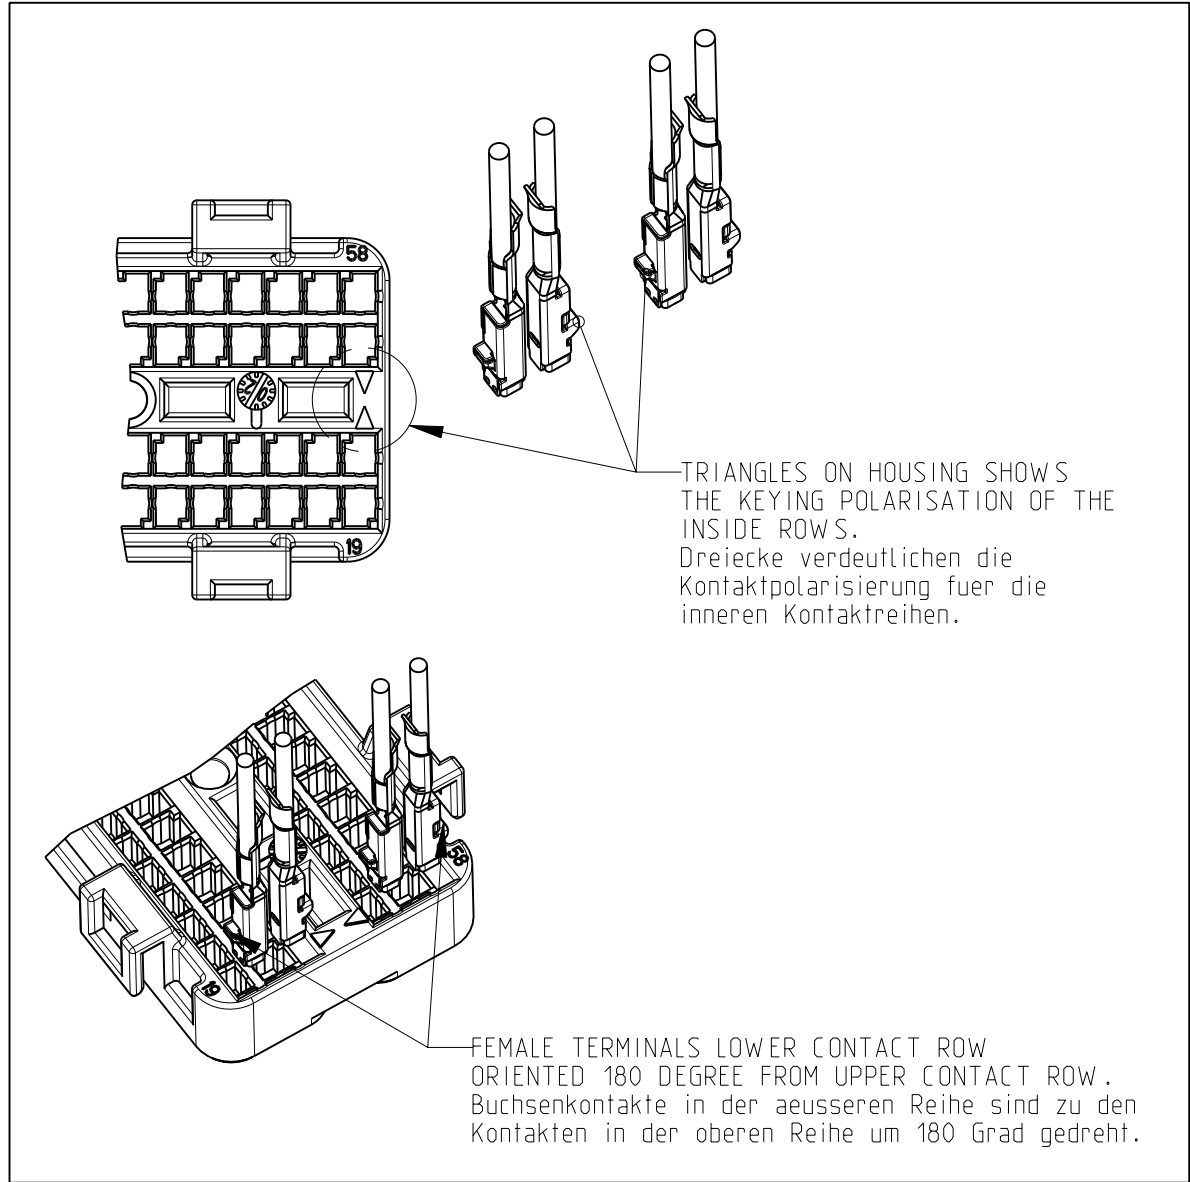


LOC		DIST		REVISIONS			
P	LYR	DESCRIPTION		DATE	DWN	APVD	
	D	ECR-12-000600		11JAN2012	GP	GM	

CODE	DIM "X"	DIM "Y"
A	5.2	5.2

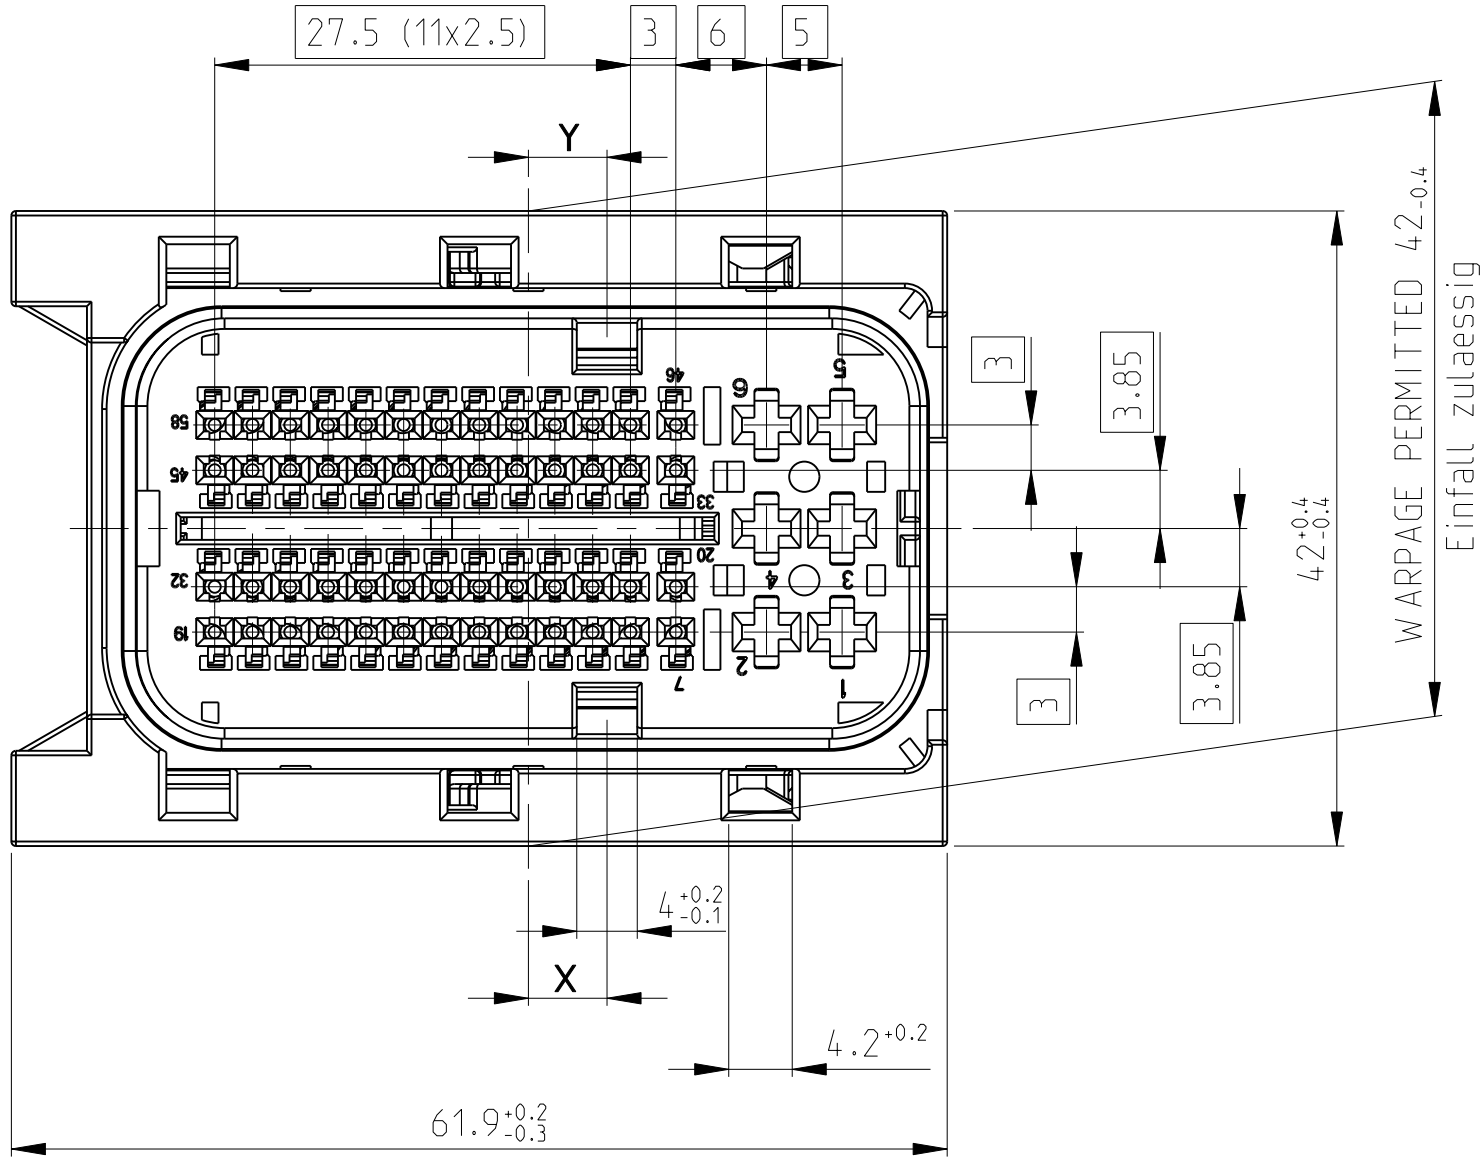

1x	PA66-GF25	58 POS. PCM CON. SLIDE RIGHT	BLACK	7	
1x	PA66-GF25	58 POS. PCM CON. SLIDE LEFT	BLACK	6	
1x	PBT-GF20	58 POS. PCM CON. COVER FOR FAMILY SEAL	BLACK	5	
1x	SILICONE	52 POS. FAMILY SEAL	LIGHT BLUE	4	
1x	SILICONE	58 POS. PCM CON. PERIPHERAL SEAL	WHITE	3	
1x	PA66-GF35	58 POS. PCM CON. CONTACT HOUSING CODING A	BLACK	2	
1x	PA66-GF35	58 POS. PCM CON. FEMALE HOUSING	BLACK	1	
QTY REQD PER ASSY		MATERIAL	DESCRIPTION	COLOR	ITEM NO
55		WEIGHT OF EACH ASSY NO (g)			
x-1563172-x		ASSEMBLY PART NUMBER			

NOTES:

- 1 ASSY USED WITH PARTS:
Assy wird verwendet mit folgenden Teilen:
HEADER BOSCH: PN: 000 20633 614
HEADER TE: PN 0-1565428-1

THE HAEDER IS NOT A PART OF THE DELIVERED ASSY.
Der Header ist kein Bestandteil der gelieferten ASSY.



- 2 MATED WITH:
Passend zu:

COVER PN: 0-1452416-1
COVER PN: 0-1452421-1
2-NDRY LOCK PN: 0-1452408-2
2-NDRY LOCK PN: 0-1452409-2
Kappe PN: 0-1452416-1
Kappe PN: 0-1452421-1
2te Kontaktsicherung PN: 0-1452408-2
2te Kontaktsicherung PN: 0-1452409-2

- 3 SEALING FUNCTION REQUIRES ONLY FOLLOWING WIRE SIZE DIAMETERS FOR THE SIGNAL TERMINALS:
Zur Sicherung der Dichtigkeit duerfen nur folgende Drahtquerschnitte bei den Signalkontakten verwendet werden
0.35mm² - 0.75mm² = ISO Ø 1.2-1.9 mm
FOR ALL WITH X MARKED CAVITIS, SEE PINOUT CONFIGURATION TABLE ON DRAWING 1564285
Fuer alle mit X markierten Felder in der Pinbelegungstabelle auf der Zeichnung 1564285

- ⚠ ASSY DELIVERED WITH SLIDERS IN END POSITION
Anlieferungszustand: Schieber in Endraststellung.

- ⚠ UNUSED CAVITIES HAVE TO BE SEALED BY THE HARNESS MAKER - CORRESPONDING BLINDPLUG
SEE PART NUMBER IN TERMINAL TABLE
Offene Kammern werden vom Kabelbaumkonfektionær gedichtet
Zu verwendende Blindstopfen siehe Teilenummer in der Tabelle

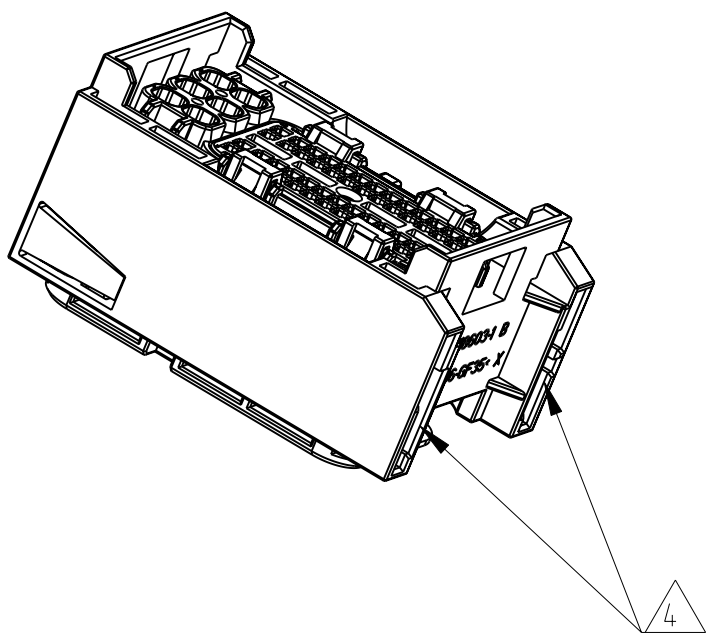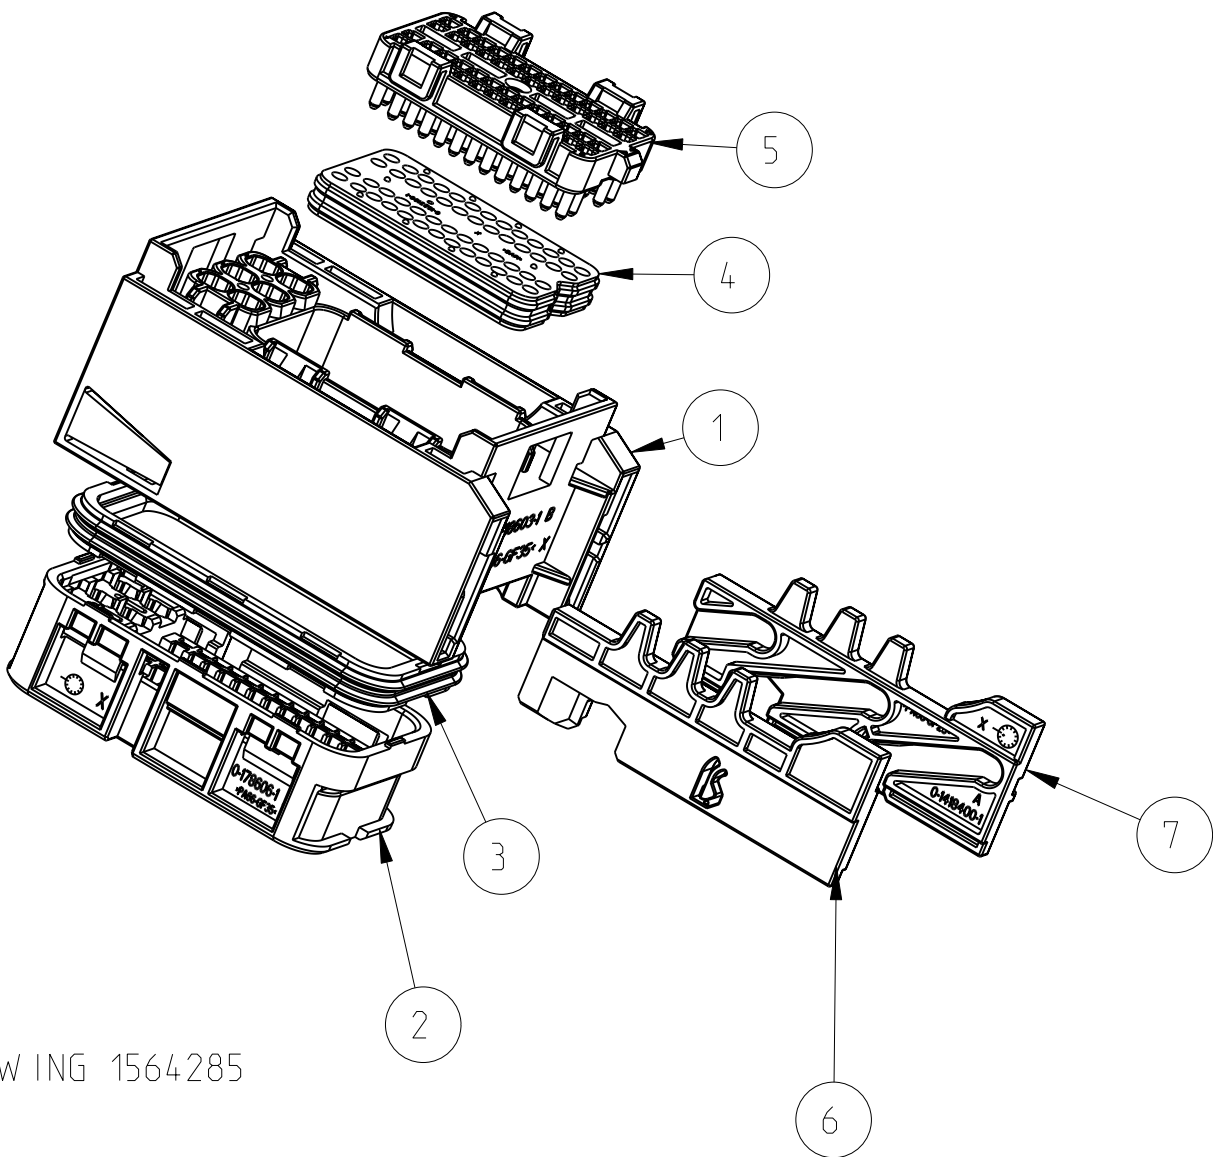

- * 1394897 WILL BE REPLACED DURING NEXT YEAR BY 1670144
* 1394897 wird innerhalb eines Jahres ersetzt durch 1670144

0-1452503-3	SILVER PLATED	1.0 - 1.5	MAT SEAL Familiendichtung	BLINDPLUG Blindstopfen 0.75mm ² PN 1-1452424-1 BROWN / braun
0-1670144-3		0.5 - 0.75		
0-1394897-3 *		0.5 - 0.75		
0-1534594-3		0.35		
0-1452503-2	GOLD PLATED	1.0 - 1.5		
0-1670144-2		0.5 - 0.75		
0-1394897-2 *		0.5 - 0.75		
0-1534594-2		0.35		
0-1452503-1	PRE-TIN	1.0 - 1.5		
0-1670144-1		0.5 - 0.75		
0-1394897-1 *		0.5 - 0.75		
0-1534594-1		0.35		
1-968857-1	PRE-TIN	>1.0 - 2.5	0-828905-1 (FOR ISOØ 2.2-3.0)	BLINDPLUG Blindstopfen PN 0-828922-1 ⚠
1-968855-1		0.5 - 1.0	0-828904-1 (FOR ISOØ 1.2-2.1)	
1-968882-1		0.35	0-828904-1 (FOR ISOØ 1.2-2.1)	
1-968857-3	SILVER PLATED	>1.0 - 2.5	0-828905-1 (FOR ISOØ 2.2-3.0)	BLINDPLUG Blindstopfen PN 0-828922-1 ⚠
1-968855-3		0.5 - 1.0	0-828904-1 (FOR ISOØ 1.2-2.1)	
1-968882-3		0.35	0-828904-1 (FOR ISOØ 1.2-2.1)	
TERMINALS TE PN TE Kontakte PN	FINISH Oberflaeche	WIRE SIZE (mm ²) Drahtquerschnitt (mm ²)	SINGLE WIRE SEAL Einzelleiterdichtung	NOTES Bemerkungen

PINOUT CONFIGURATION SEE DRAWING 1564285
Pinoutkonfiguration siehe Zeichnung 1564285

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN L.SCHAAD 15AUG2007	 TE Connectivity	
DIMENSIONS:		CHK K.ROTH 15AUG2007		
mm	TOLERANCES UNLESS OTHERWISE SPECIFIED: DIN 16701-120	APVD G.MUMPER 15AUG2007	NAME 58POS. CONNECTOR ASSEMBLY (6 x MCP 2.8mm / 52 x MCON 1.2mm) FOR 154POS. CONNECTOR	
		PRODUCT SPEC	SIZE CAGE CODE DRAWING NO	
	MATERIAL -	APPLICATION SPEC	RESTRICTED TO	
		WEIGHT -	-	
CUSTOMER DRAWING			SCALE 2:1	SHEET 1 OF 1
			REV D	