


THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION
 © COPYRIGHT - By - ALL RIGHTS RESERVED.

LOC	DIST	REVISIONS			
P	LTR	DESCRIPTION	DATE	DWN	APVD
HC	00	A1	ECR-12-005726	27MAR12	RK MY

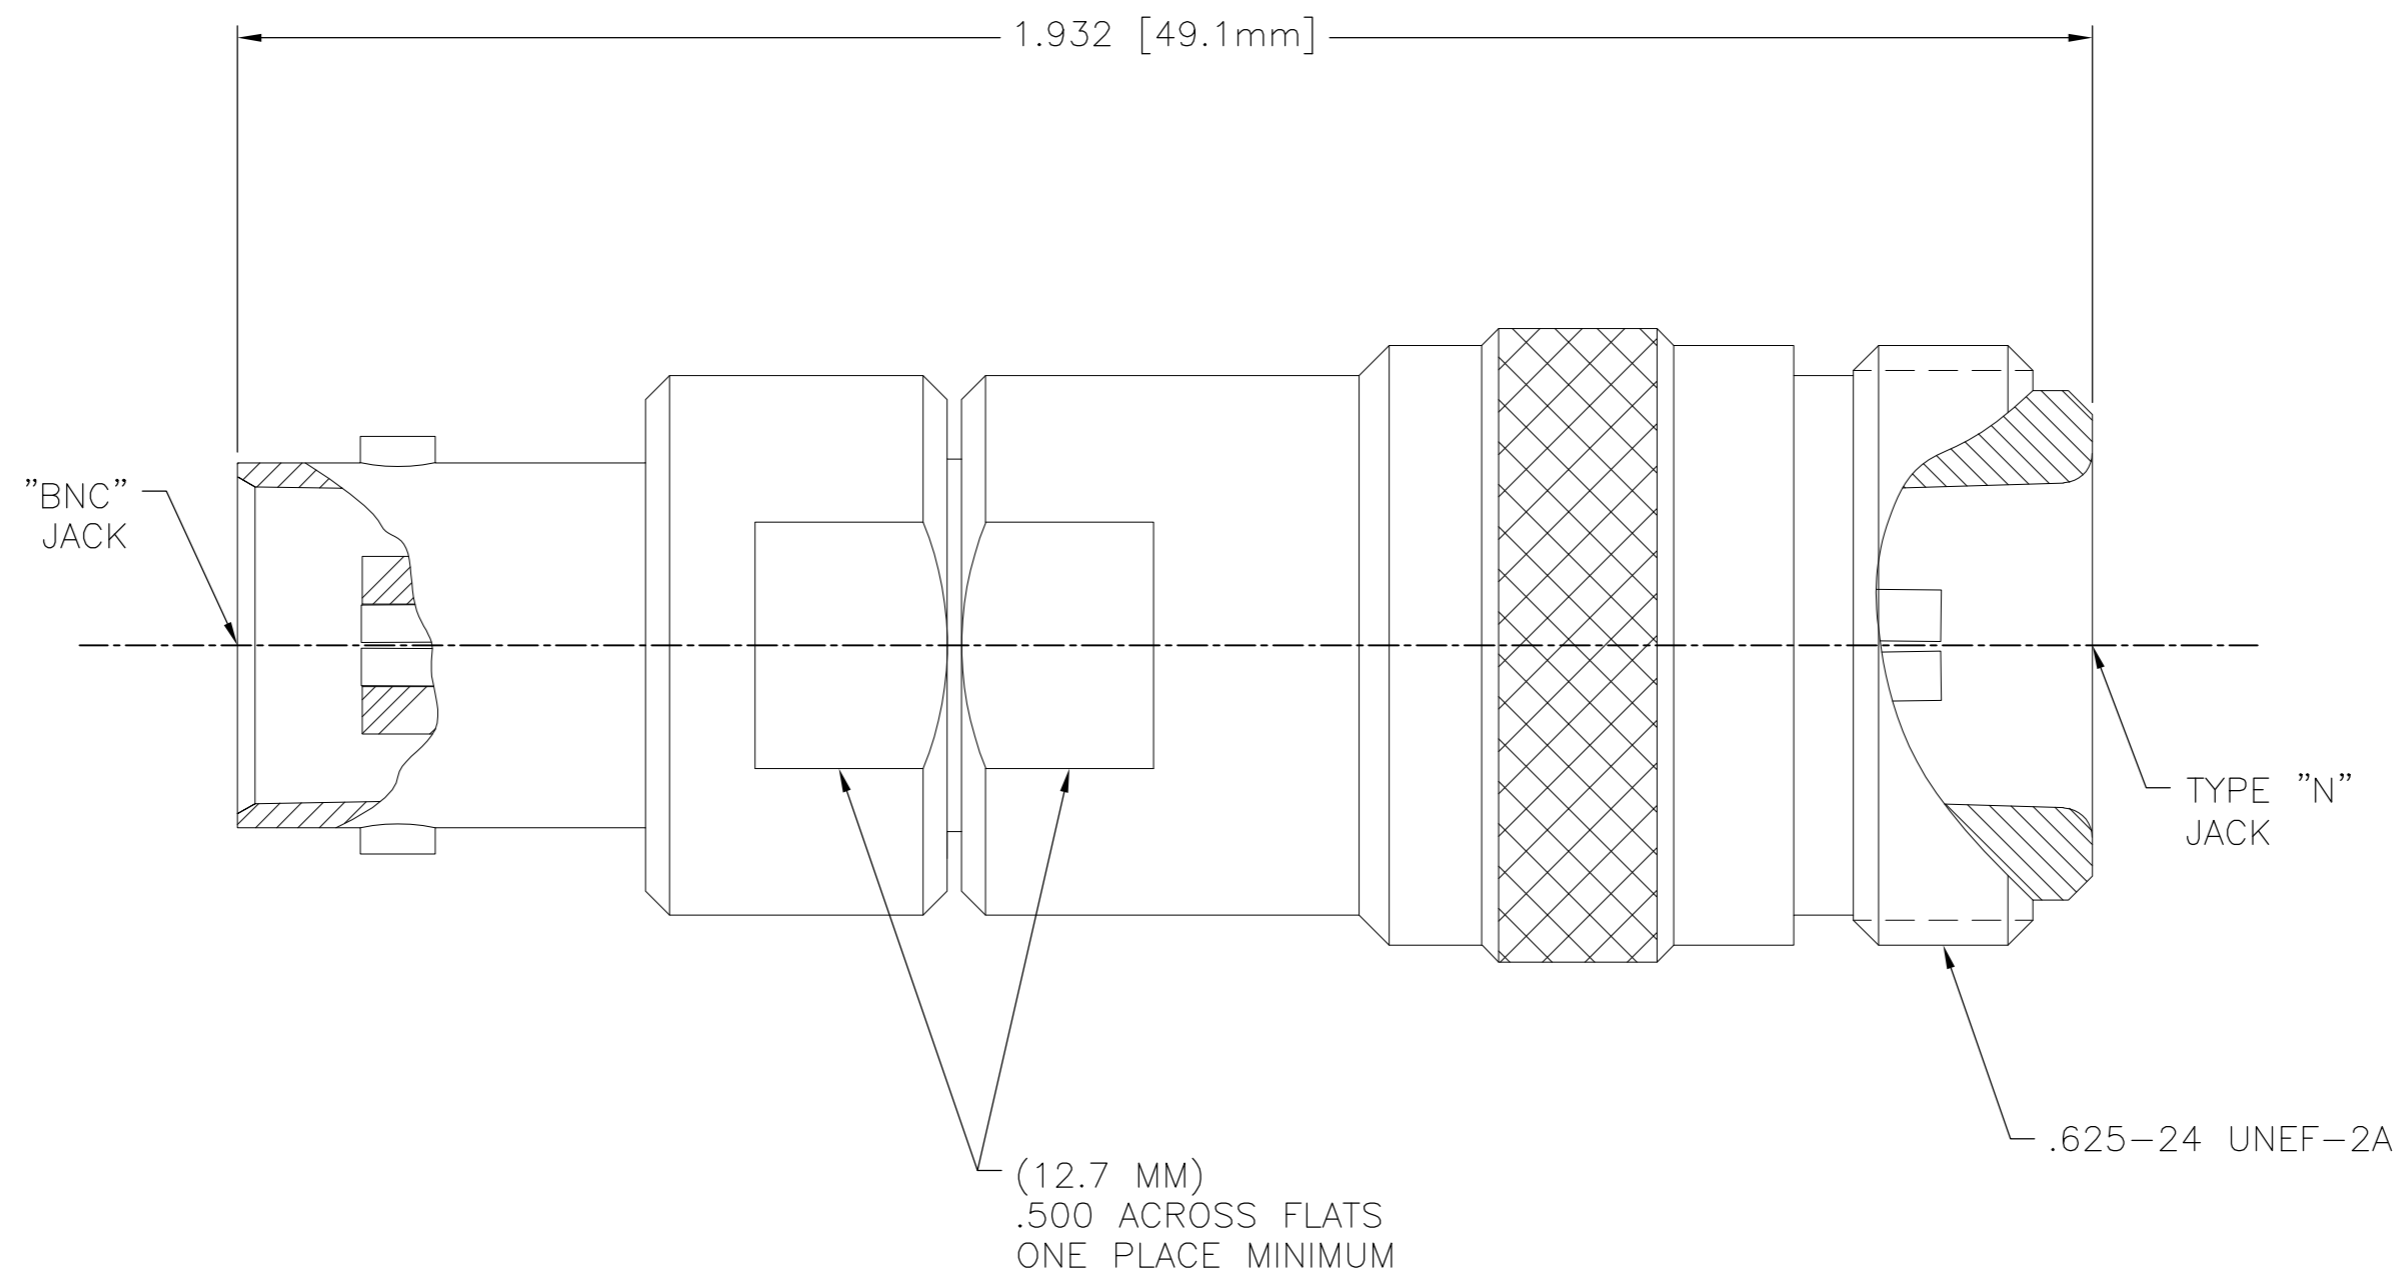

MATERIAL:
 CENTER CONDUCTOR- BERYLLIUM COPPER PER ASTM-B196, ALLOY C17300 COND H.
 OUTER CONDUCTOR- HALF HARD BRASS ASTM-B-16

TYPE "N" JACK- STAINLESS STEEL
 PER ASTM A4B4 & A5B2
 CLASS 303,

DIELECTRIC- PTFE PER ASTM-D-1457

PLATING:
 INNER CONDUCTOR- GOLD PER MIL-G-45204
 OUTER CONDUCTOR- NICKEL PER QQ-N-290
 TYPE "N" JACK- PASSIVATED PER QQ-P-35

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN G. VIERA 24APR03	STE TE Connectivity	
DIMENSIONS: INCHES		CHK D. CAMELIO 24APR03		
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD D. CAMELIO 24APR03	NAME N JACK TO BNC JACK ADAPTER (3080-2320-00)	
0 PLC ± -		PRODUCT SPEC	SIZE	CAGE CODE
1 PLC ± -		APPLICATION SPEC	A2	00779
2 PLC ± -		WEIGHT	DRAWING NO C=1057350-1	
3 PLC ± .005		RESTRICTED TO	-	
4 PLC ± -		MATERIAL	SCALE 5:1 SHEET 1 of 1 REV A1	
ANGLES ± 1°		FINISH	CUSTOMER DRAWING	