


# Double-Pole Rocker Switch

## WR Series

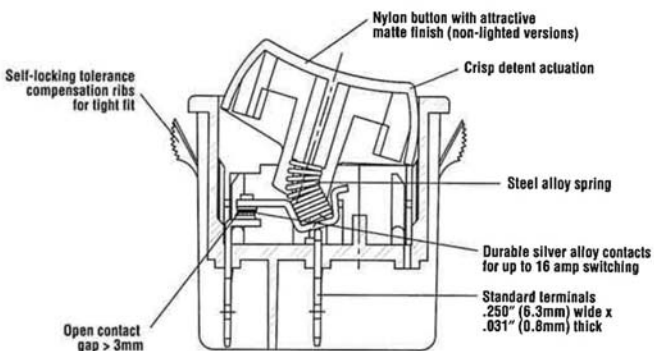

### Features

- Rugged design for 2-pole high current designs
- Lighted and non-lighted
- Maintained action and momentary
- Single pole and double pole

Electrical Ratings				
Switch Series	EN61058 Rating	UL1054 Rating	Electrical Life at Rated Load	
			According to VDE (Min. Operations)	According to UL (Min. Operations)
WRG	16(4)A 250V~T125/55	16A 125/250 VAC 1/4HP 3/4HP 250VAC	10,000	6,000

Electrical Specifications		Material Specifications	
Ratings (WRG) :	16A 125/250 VAC 1/4HP 3/4HP 250VAC (cULus)  16(4)A 250V~T125/55 (VDE)	Actuator (non-lighted): (lighted):	Nylon 66 94V-2 Polycarbonate
		Base:	Nylon 66 94V-2
Dielectric Strength:	1000VAC for 1 minute	Spring:	Steel Wire
Insulation Resistance:	100M ohms min at 500VDC	Contacts:	Silver Alloy
Initial Contact Resistance:	0.020 ohms max	Movable Arm:	Silver-Plated Copper Alloy
Temperature Range:	0°C to + 65°C (UL)	Terminals:	Tin-Plated Copper Alloy

RoHS Compliant  
UL File No: E23301




Specifications subject to change without notice.



# Double-Pole Rocker Switch

## WR Series

**Dimensions** inches (mm)

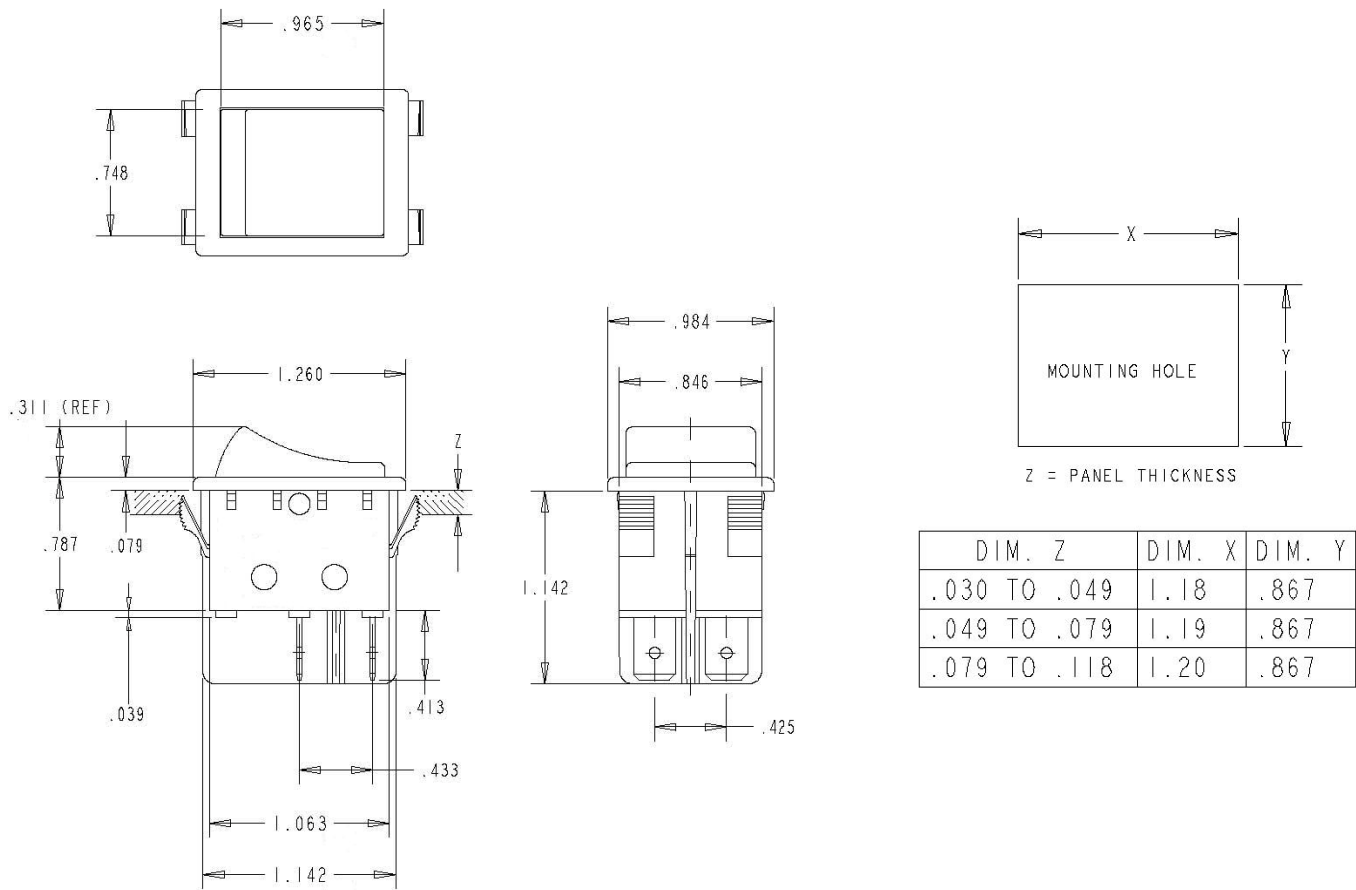

**Examples of Common Part Numbers and Descriptions** inches (mm)

Part Number	Circuitry	Switch Function	Terminal Type	Actuator/ Housing Color	Legend Marking
WRG32F2FBBNN		On – Off	0.250 (6.3) Quick-Connect	Black/Black	
WRG32F2BBRLN		On – Off/Lighted	0.250 (6.3) Quick-Connect	Red/Black	
Boot #0015-0646					

## Ordering Information

**WR** Series

**G**

**3**

Code	Circuitry
2	Single Pole
3	Double Pole

**2**

Code	Switch Function
2	On - Off
3	On - On
5	(On) - Off
6	(On) - On

**F**

Code	Actuator Type
2	Curve
5	Flat Actuator

**B**

Code	Housing Color
B	Black
W	White
Y	Grey

**N**

Code	Lighted
N	Non-Lighted
L	Lighted (Bulb 125VAC)
E	Lighted (Bulb 250VAC)
F	Lighted 5VDC Incandescent
G	Lighted 6VDC Incandescent
H	Lighted 12VDC Incandescent

Code	Contact Rating
G	16A 125/250 VAC 1AHP 3/4HP 250VAC cULus 16(4)A 250V~T125 VDE

Note: 10(2)A 250V~ 50E3 T125 special order

Code	Actuator Marking
B	Blank
C	
D	
E	
F	

Code	Actuator Color
A	Amber
B	Black
G	Green
R	Red
W	White
Y	Grey

Code	Splashproof
N	No Rocker Boot

Rocker boot sold separately P/N: 0015-0646

## Contact

Call, fax or visit our  
Website for more information.

**ZF Electronics Corporation**  
11200 88th Avenue  
Pleasant Prairie, WI 53158

Phone: 262.942.6500  
Web: [www.cherrycorp.com](http://www.cherrycorp.com)  
Email: [cep\\_sales@zf.com](mailto:cep_sales@zf.com)  
Fax: 262.942.6566

The manufacturer accepts no liability for errors or non-availability, and reserves the right to change specifications without prior notice.

Technical data relates to product specifications only. Features may differ from those described. Only drawings combined with product specifications shall be deemed binding.

© 2007 ZF Electronics Corporation

Last Updated: 10/01/12