


PART NUMBER	APPLICATION DIAMETER RANGE	MATERIAL	* "B" +/- .062 PRINT ON AREA	"D" +/- .062 LENGTH	"E" REPEAT	LABELS PER ROW	STANDARD PKG. QTY.
R050X075VIT	.120-.160	GMH6	.25 [6.4]	1.25 [31.8]	1.50 [38.1]	8	5000
R050X125VIT	.160-.220	GMH6	.38 [9.5]	1.75 [44.5]	2.00 [50.8]	8	5000
R050X150VIT	.220-.280	GMH6	.50 [12.7]	2.00 [50.8]	2.25 [57.2]	8	5000

NOTES:

1. MILLIMETERS ARE IN [].
2. SEE B20392 FOR INSTALLATION INSTRUCTIONS.

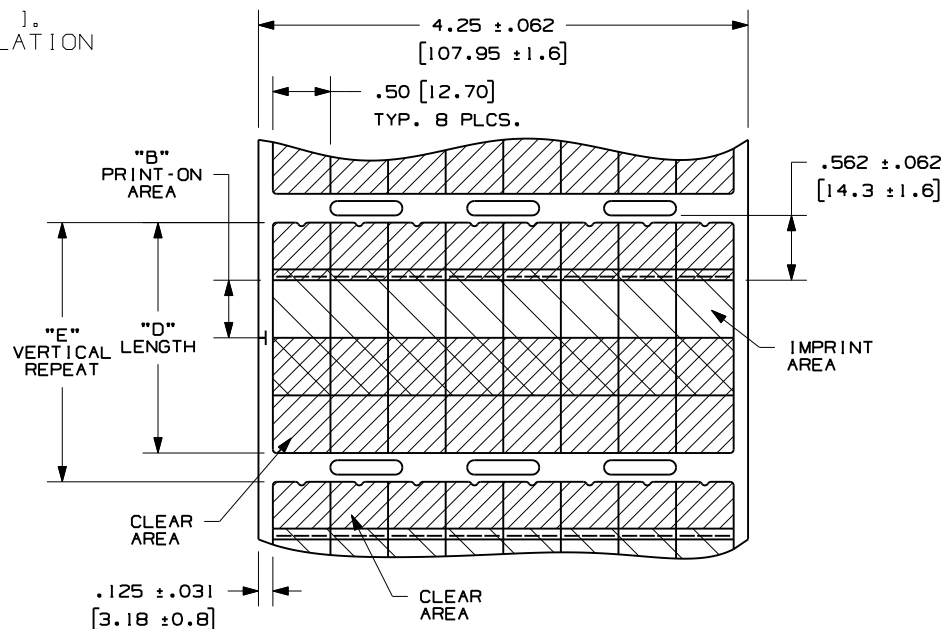

CAD FILENAME/LAYERS

100147BC-DC-C10784/02A

PANDUIT CORP. TINLEY PARK, ILLINOIS

CUSTOMER DRAWING
TURN TELL ROTATABLE
SELF-LAMINATING LABEL, R050X***VIT

UNLESS OTHERWISE SPECIFIED,
DIMENSIONAL TOLERANCES ARE:
(.X) $\pm$.12 (.XXX) $\pm$.025
(.XX) $\pm$.062 ANGLES $\pm$

UNLESS OTHERWISE SPECIFIED,
ALL DIMENSIONS ARE GIVEN
IN INCHES, THIRD ANGLE PROJECTION.

DRAWN BY
RVU

MAT'L:

SCALE

NTS

DATE
3/1/11

SEE TABLE

DRAWING NO.

C10782

DWG
A
SIZEO 3/1/11 RVU *RVU* DRAWING RELEASE.

6321

R

REV DATE BY CHK DESCRIPTION

ECN - R CUST SUP

CHK'D *RVU*