

LOC	DIST	REVISIONS					
		P	LTR	DESCRIPTION	DATE	DWN	APVD
AD	00		A	RELEASED	25SEP2012	-	JE

- 2

PHOSPHOR BRONZE
- 3

LCP, UL94V-0
- 4

FINISH:
CONTACT MATING AREA MEETS THE PERFORMANCE REQUIREMENTS OF
TE CONNECTIVITY PRODUCT SPECIFICATION 108-1957; BASED ON
TELCORDIA GR-1217-CORE, APPLICATIONS IN UNCONTROLLED ENVIRONMENTS.
COMPLIANT PIN AREA: 0.5µm MIN MATTE TIN OVER BASE PLATING.
- 5






CONNECTOR MARKED WITH PART NUMBER AND DATE CODE
- 6

REFERENCE APPLICATION SPEC 114-13020 FOR RECOMMENDED
PLATED THRU HOLE DIAMETER AND PLATING THICKNESS.
- 7


APPLICATION SEATING HEIGHT TO PRINTED CIRCUIT BOARD
- 8

DATUMS AND BASIC DIMENSIONS ESTABLISHED BY CUSTOMER
- 9

CONTACT AREA LUBRICATED WITH BELLCORE APPROVED LUBRICANT
TECHNICAL REFERENCE: GR-1217-CORE, ISSUE 1, NOVEMBER 1995

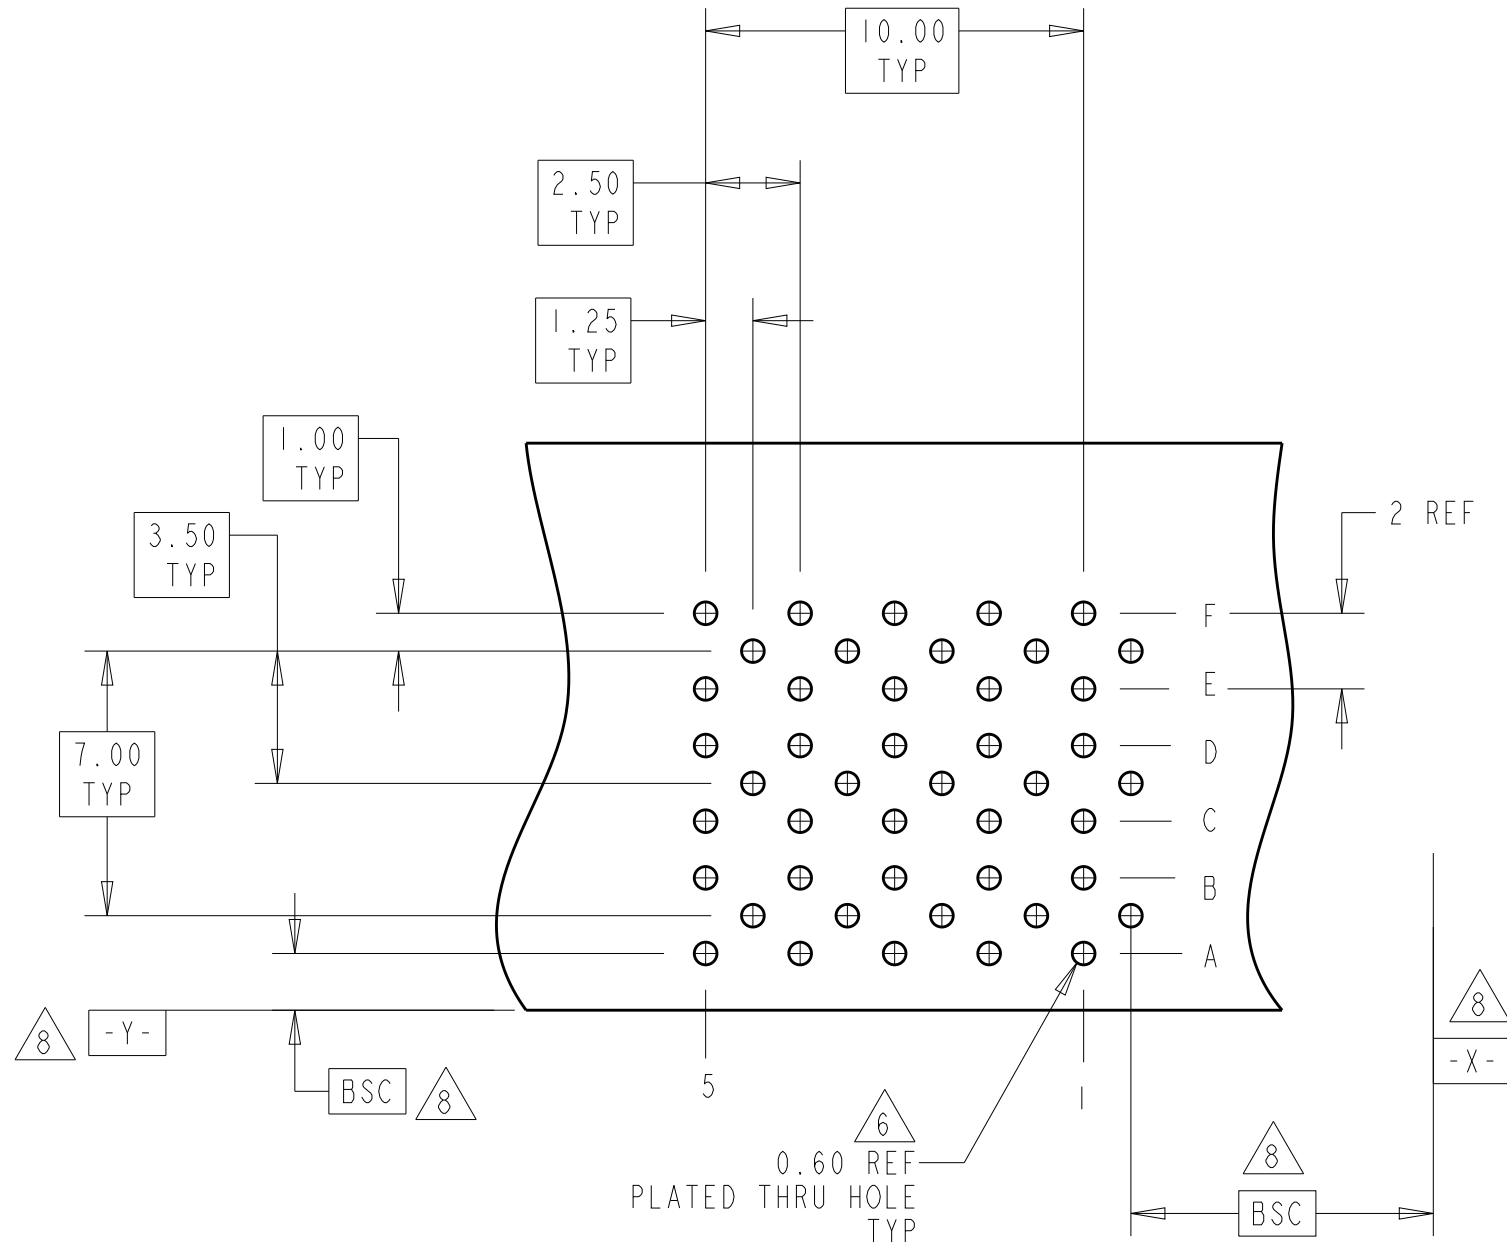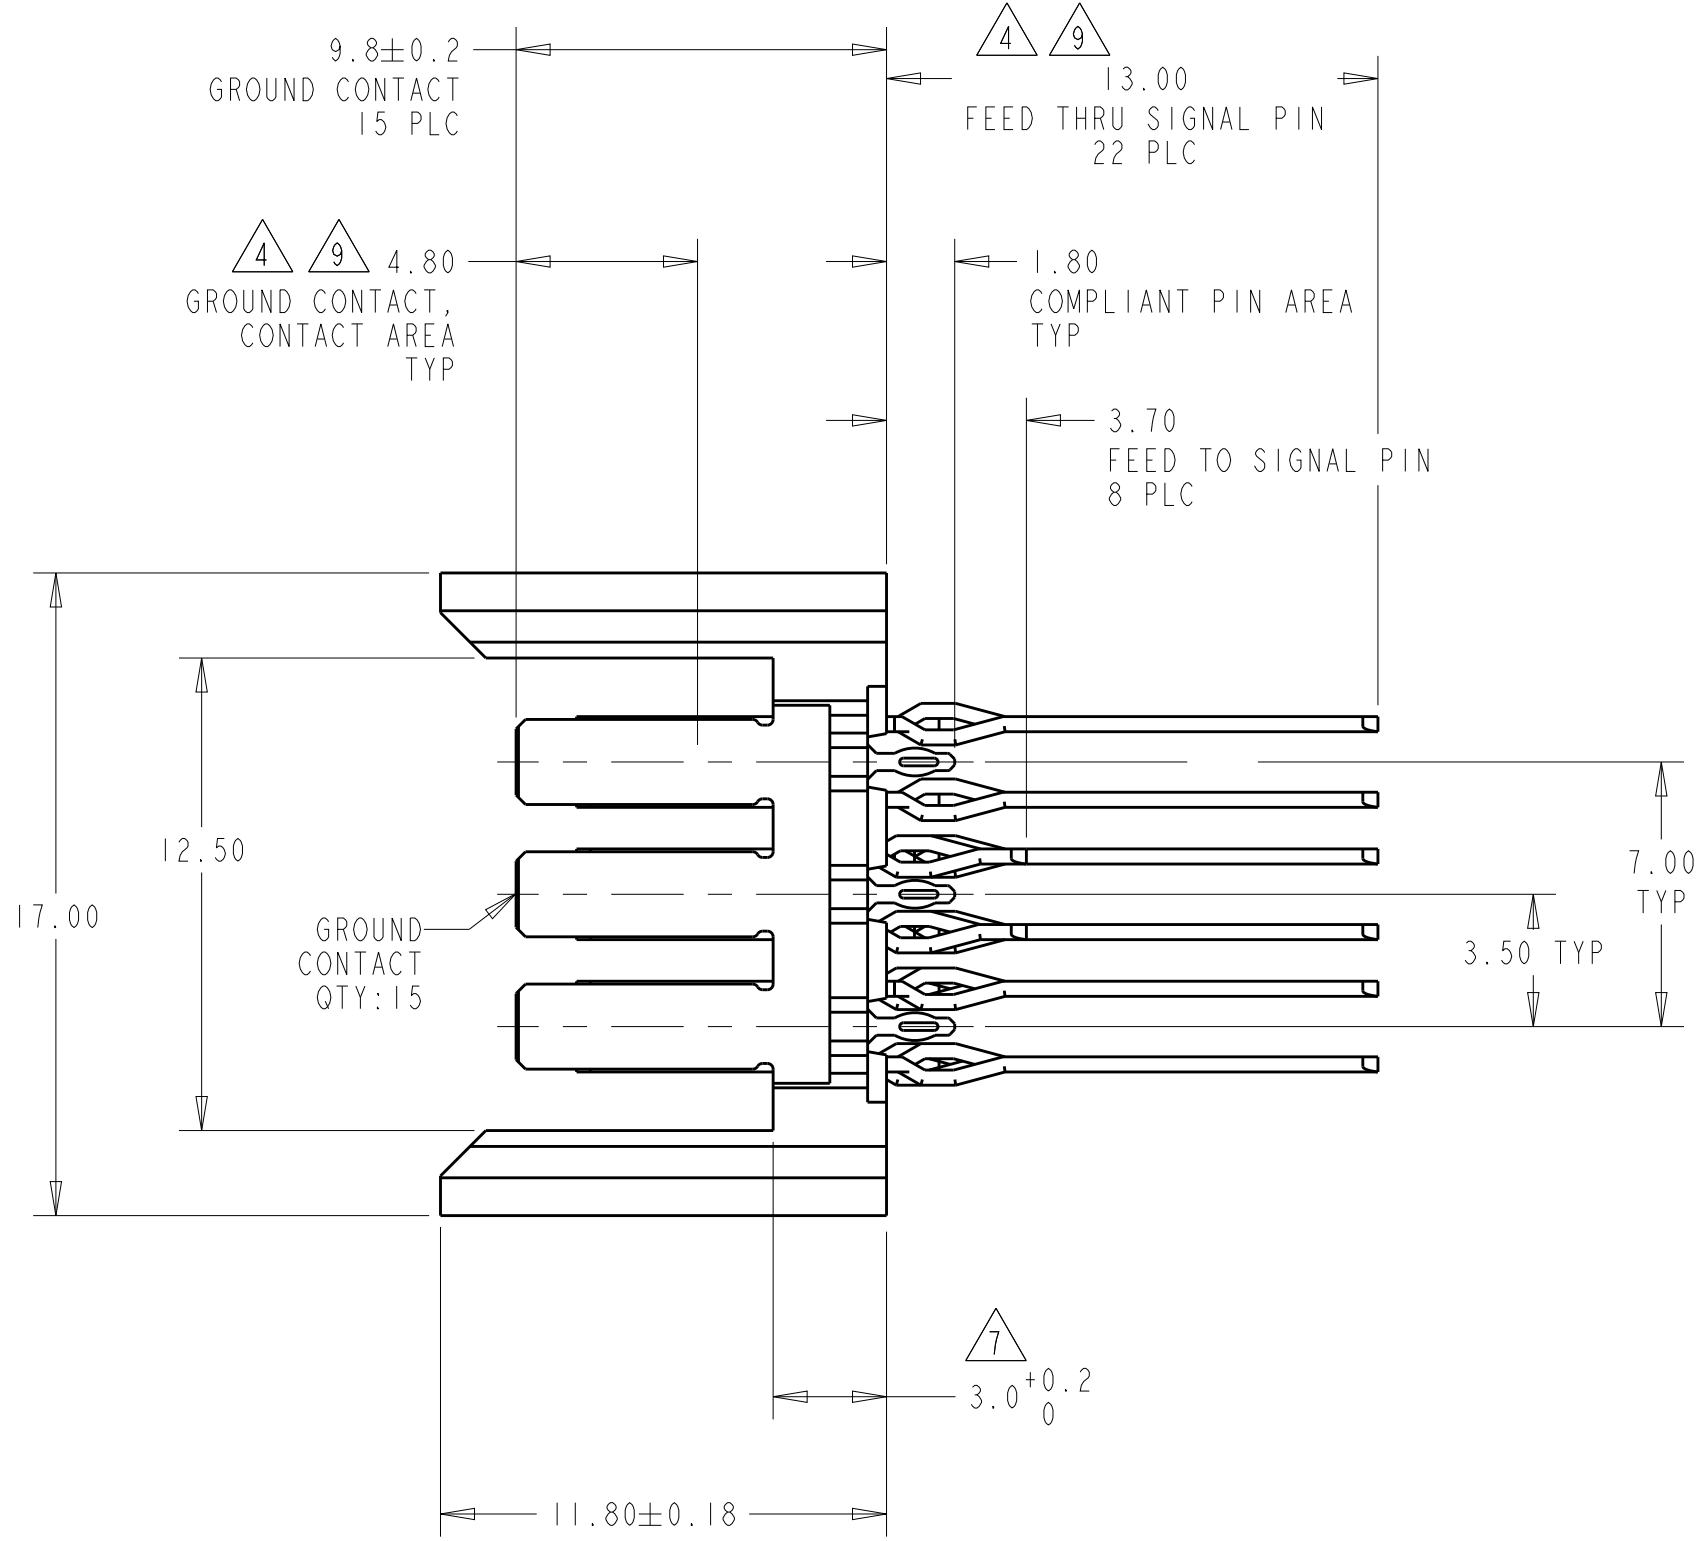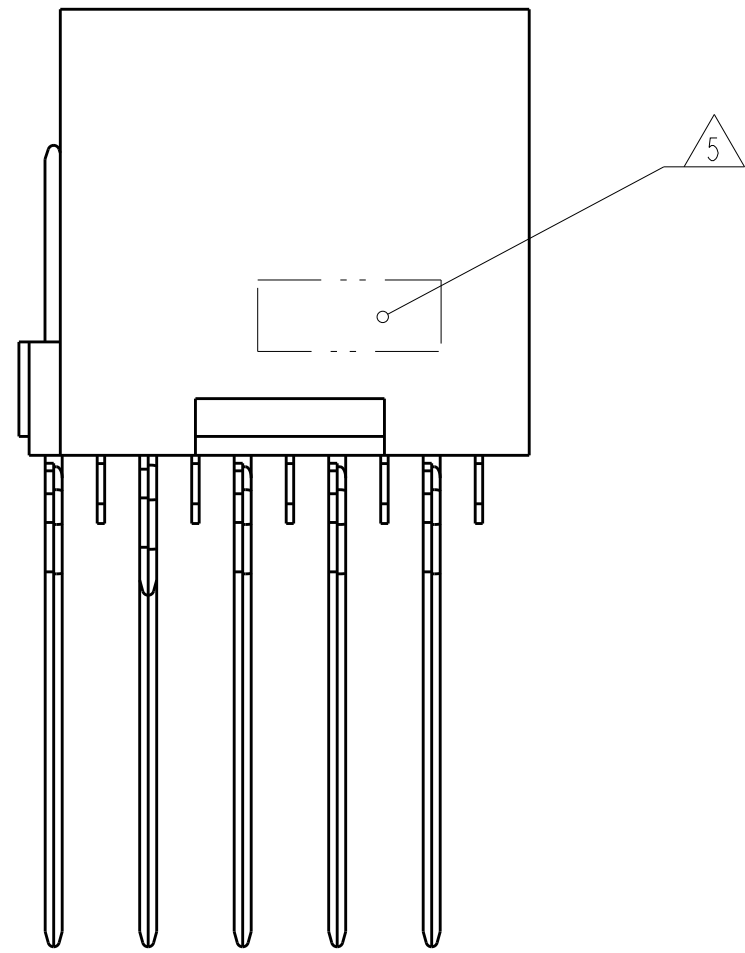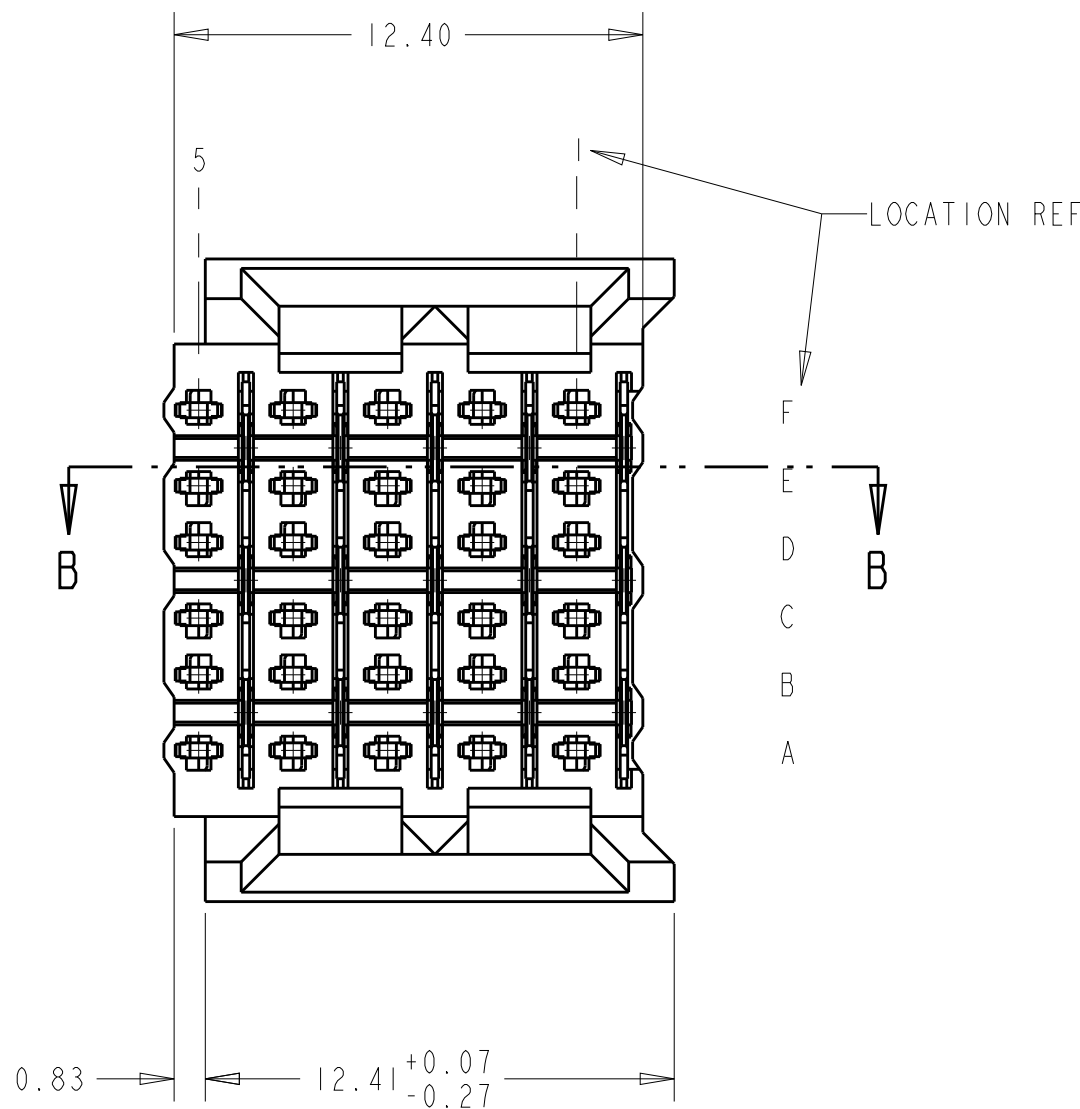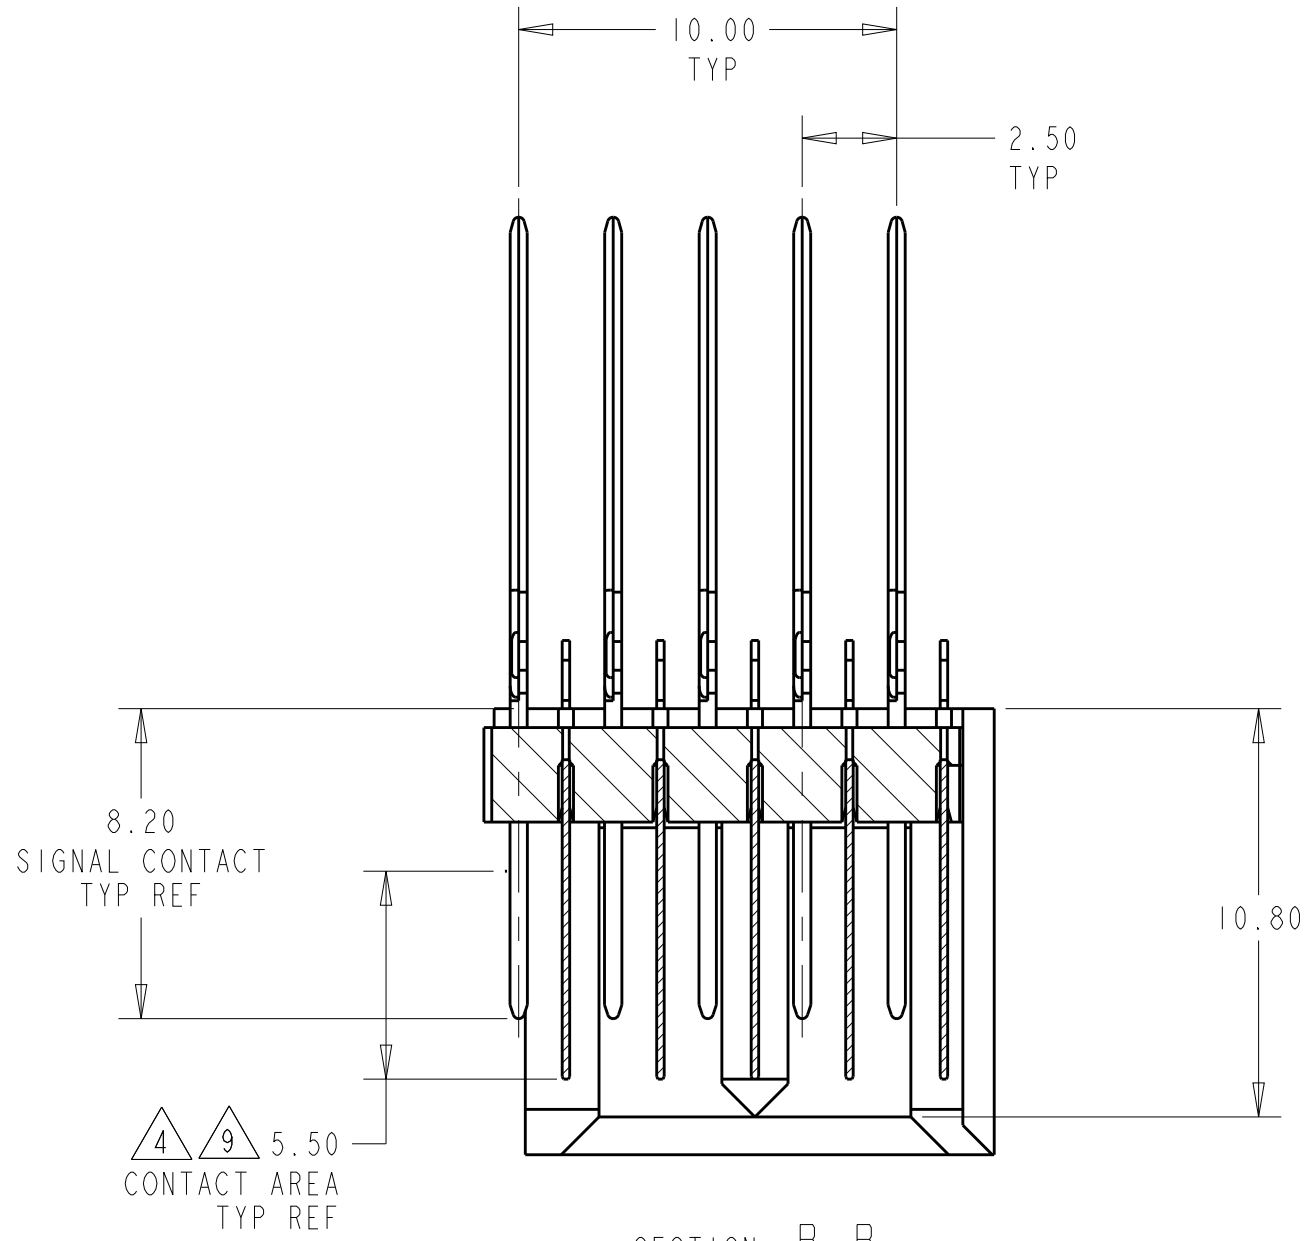

RECOMMENDED
PRINTED CIRCUIT BOARD
LAYOUT
COMPONENT SIDE OF PRINTED CIRCUIT BOARD

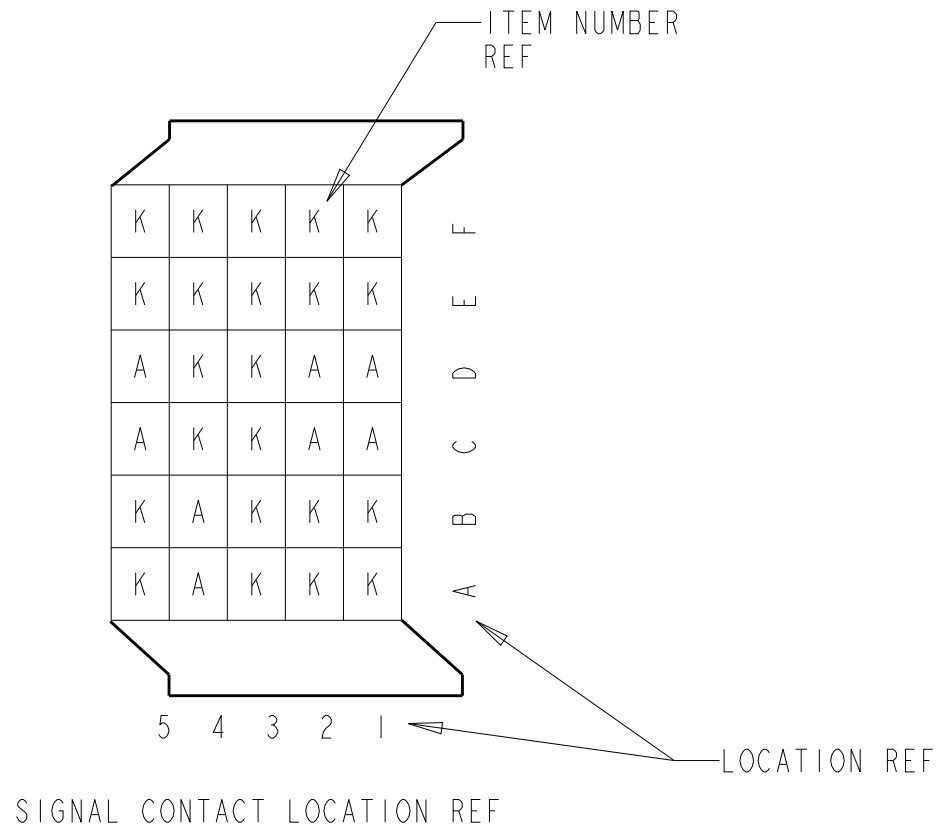

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN R. TREA 20FEB2007	5120998-1	
DIMENSIONS:		CHK R. PATTERSON 20FEB2007	AMP PART NUMBER	
mm		APVD R. PATTERSON 20FEB2007	TE Connectivity	
TOLERANCES UNLESS OTHERWISE SPECIFIED:		PRODUCT SPEC	NAME HEADER ASSEMBLY, 30 POSITION, FEED THROUGH, 6 ROW, BACKPLANE CONNECTOR, Z-PACK HS3	
0 PLC ±		APPLICATION SPEC	SIZE A1	
1 PLC ±		WEIGHT	CAGE CODE 00779	
2 PLC ±		CUSTOMER DRAWING	DRAWING NO 5120998	
3 PLC ±			RESTRICTED TO	
4 PLC ±			SCALE 5:1	
ANGLES ±			SHEET 1 OF 1	
FINISH			REV A	
CONTACTS: 2				
SIGNAL CONTACT: 4				