


Dimensions: mm (in.)

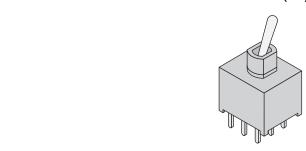


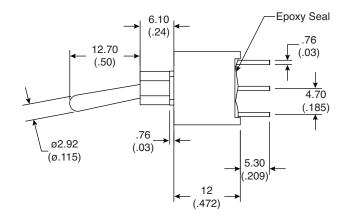




POS.2

(ON)





2-3,5-6,8-9 2-1,5-4,8-7

2 Comm. 3 2 2 Comm. 3 2 4 5 5 Comm. 6 7 7 5 7 6

POS.1

ON

P.C. Mounting

Switch Function

Note:

RoHS Compliant by Exemption

Electrical Specifications:

- Contact resistance: $10m\Omega$ max. initial @ 2-4VDC 100mA
- Insulation resistance: 1,000M Ω min.
- Dieletric strength: 1,000 V RMS@sea level
- Rating: 2A / 250VAC; 5A / 120VAC or 28VDC

Mechanical Specifications:

- Mechanical life: 30,000 make-and-break cycles
- Operating temperature: -30°C to 85°C

Soldering Process:

- Manual Soldering: Use a soldering iron of 30 watts, controlled at 350°C approximately 5 sec. while applying Solder.
- Wave Soldering: Recommended soldering temperature: 260±5°C
 Duration of solder immersion: 5±1 sec.
 (PCB is 1.6mm in thickness)

Sealed Miniature Toggle Switch 108-1A32T1281-EVX



Available from Mouser Electronics

www.mouser.com

1-800-346-6873