

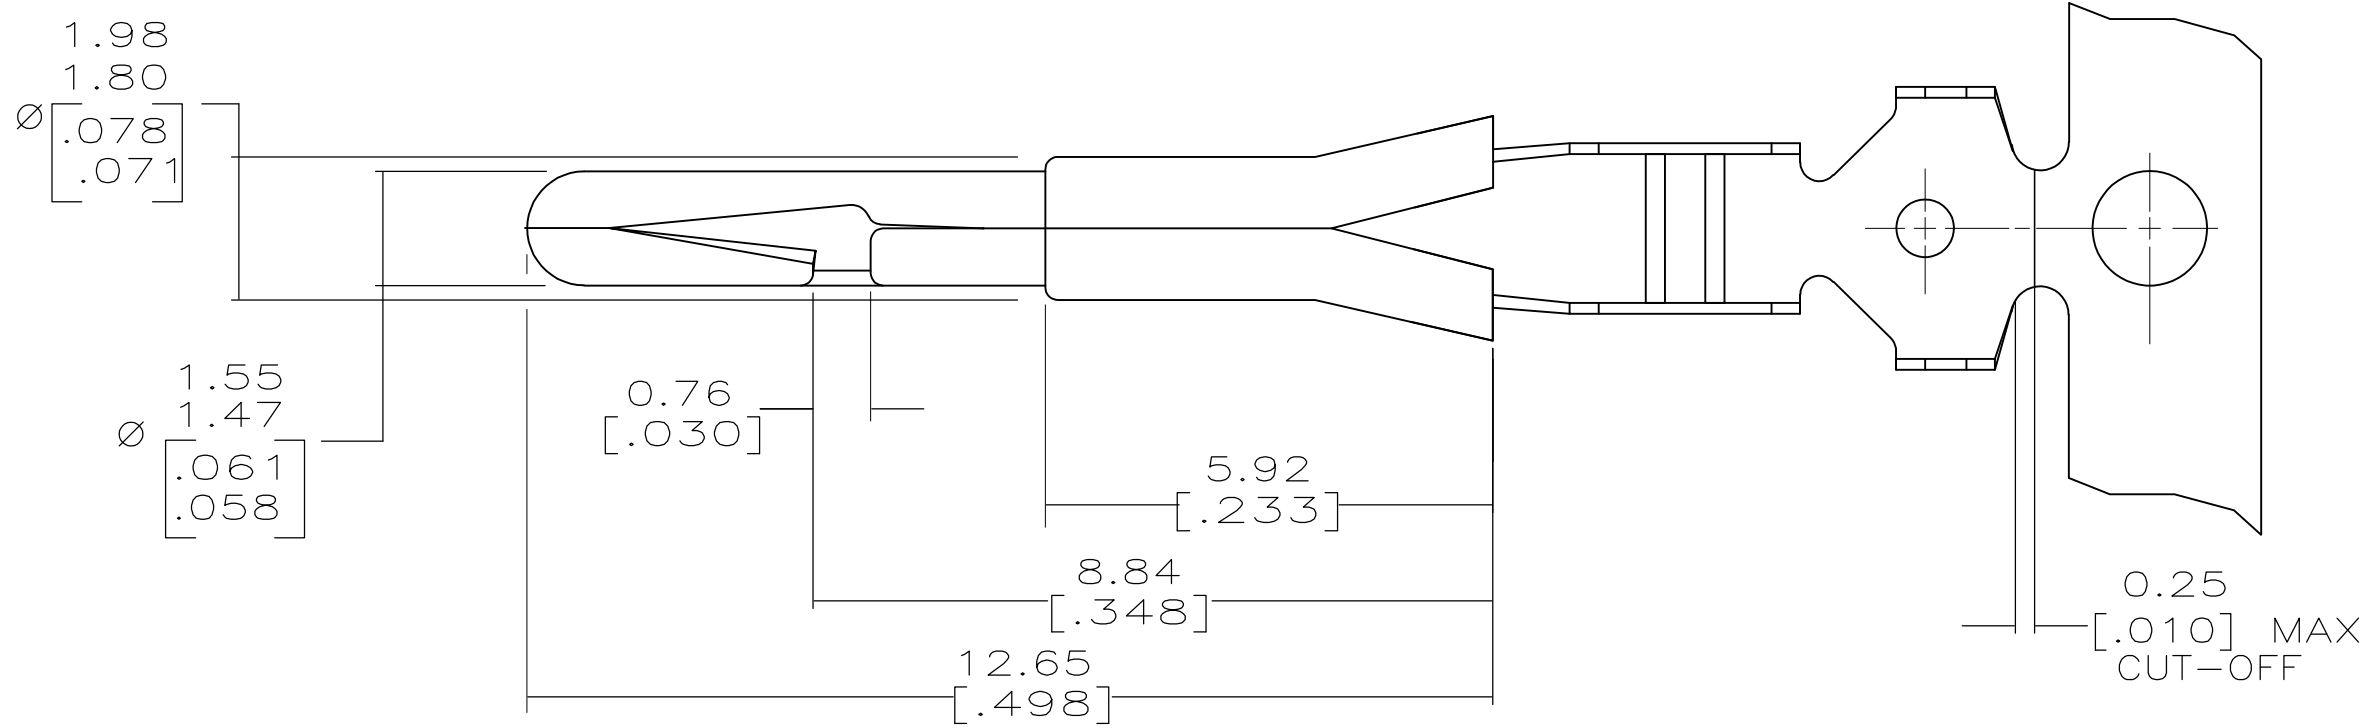
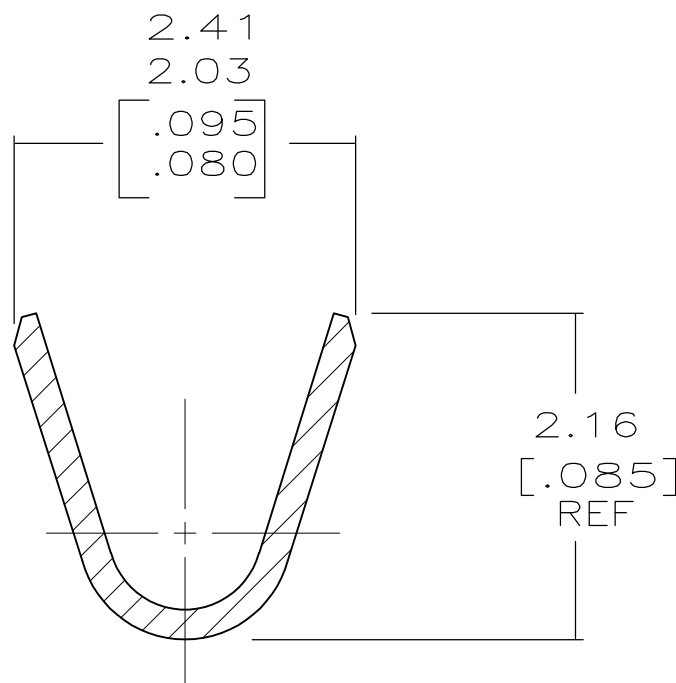



LOC		DIST		REVISIONS					
AF	50	P	LTR	DESCRIPTION			DATE	DWN	APVD
			G	REVISED PER OG3A-0332-04			10MAY04	MF	GP
			G1	REVISED PER ECO-10-000443			18JAN10	KK	AEG

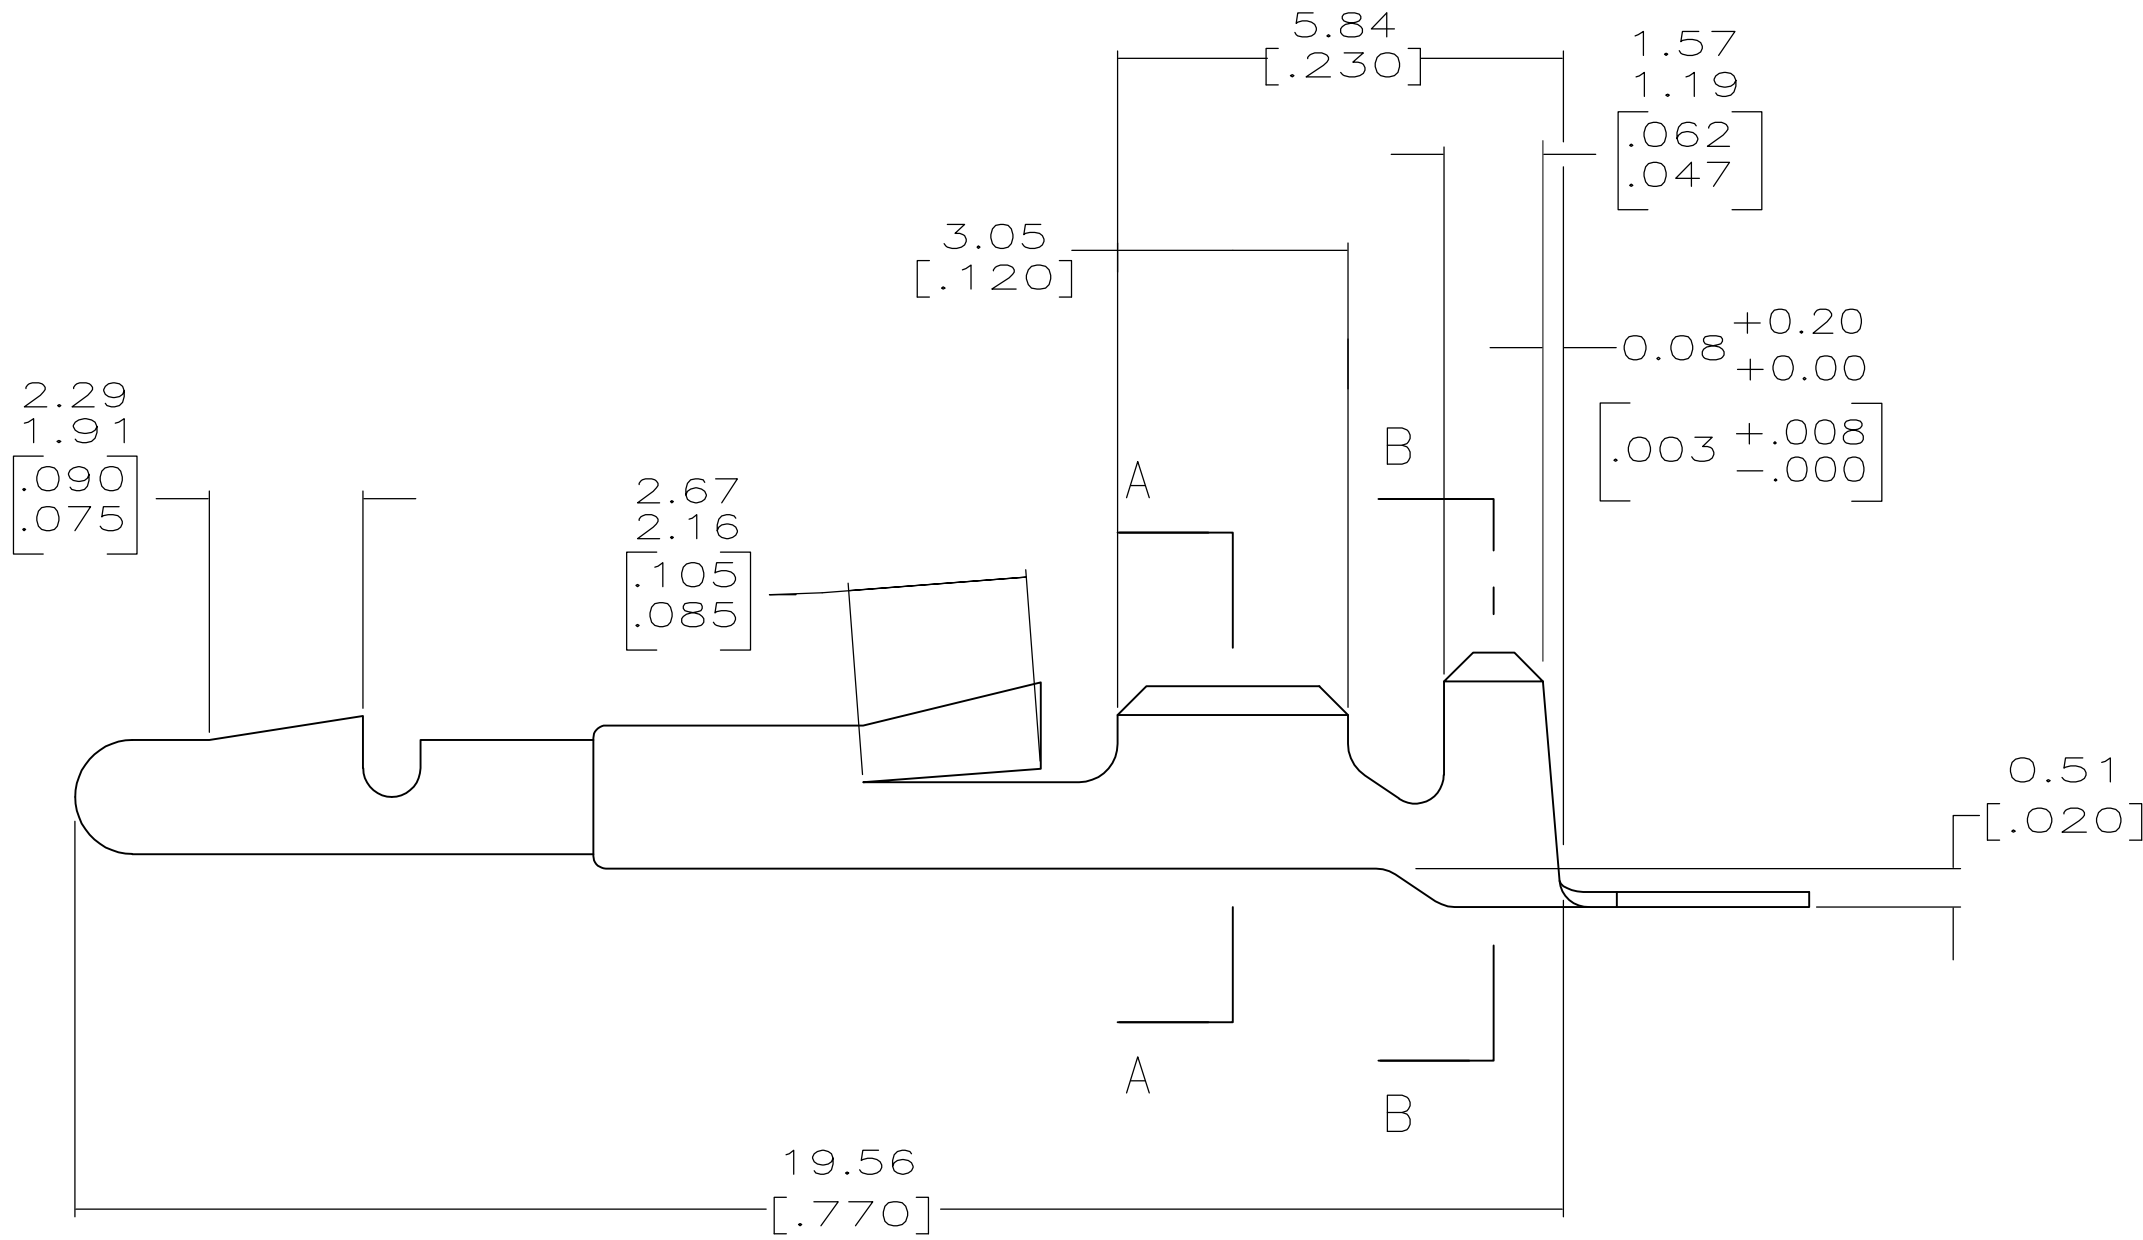

- INSULATION RANGE: $\varnothing$ 1.52-2.79 [.060-.110].
WIRE RANGE: 0.3-0.9 mm² [22-18] AWG.
- 770381-2 IS REVERSE REEL OF 770381-1.
- DIMENSIONS IN BRACKETS ARE IN INCHES.
- OBSOLETE PARTS: OBSOLETE CIS STREAMLINING PER D.RENAUD/D.SINISI

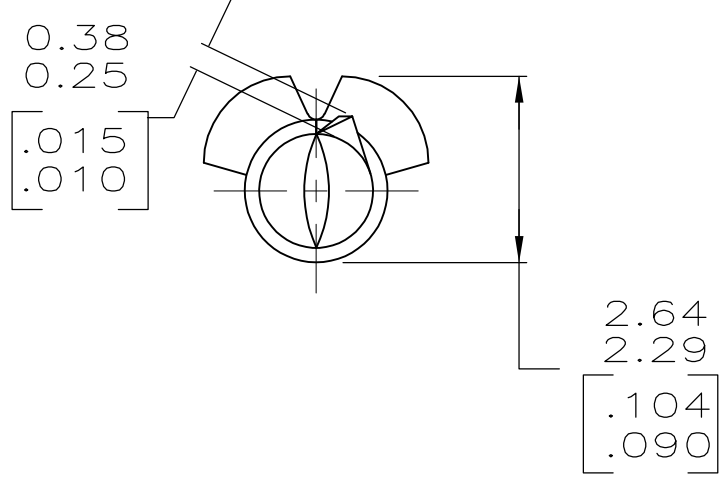

SECTION A-A
SCALE 20:1

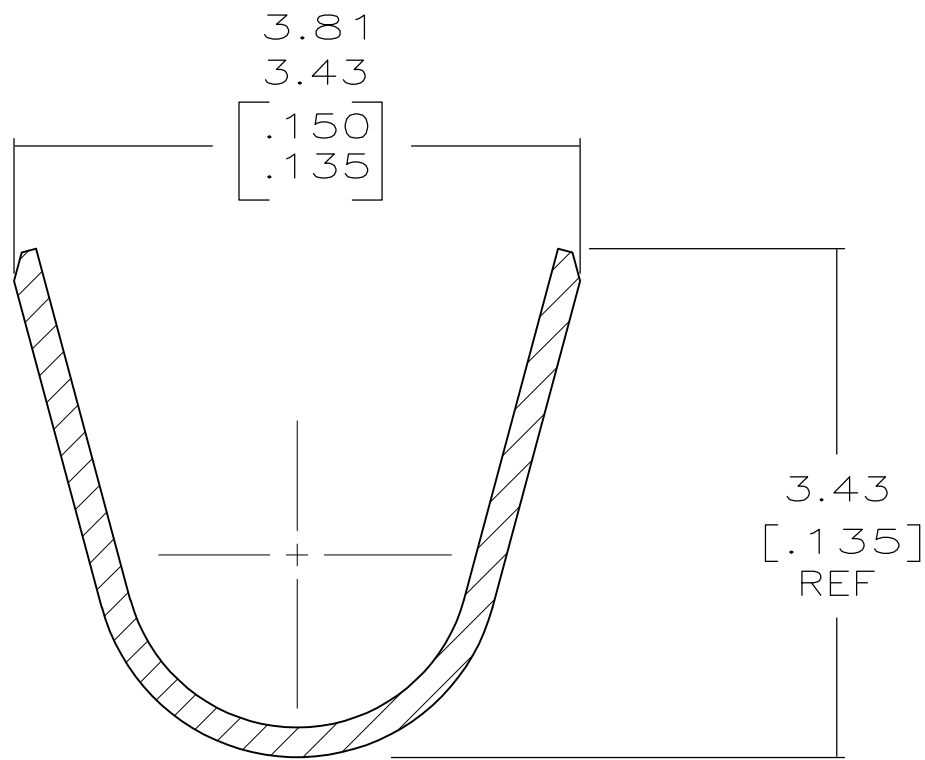

SECTION B-B
SCALE 20:1

4 OBSOLETE	2	770381-2
	-	770381-1
NOTE	PART NUMBER	

METRIC

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN K. WHITAKER 2-4-88	 Tyco Electronics Corporation Harrisburg, Pa 17105-3608	
		CHK R. SWING 2-5-88		
DIMENSIONS: mm [INCHES]	TOLERANCES UNLESS OTHERWISE SPECIFIED:	APVD M. SHORE 2-5-88	NAME	
		PRODUCT SPEC	PIN,.060 DIA.AUTOMOTIVE MATE-N-LOK TM	
	0 PLC ± .	APPLICATION SPEC	SIZE	
	1 PLC ± .	WEIGHT	A1 00779C=770381	
MATERIAL 0.20 [.008] BRASS	FINISH PRE-TIN	CUSTOMER DRAWING	SCALE	10:1
			SHEET 1 OF 1	
			REV	G1