
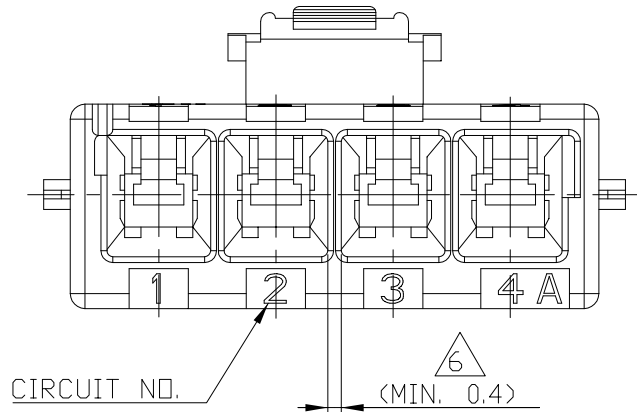
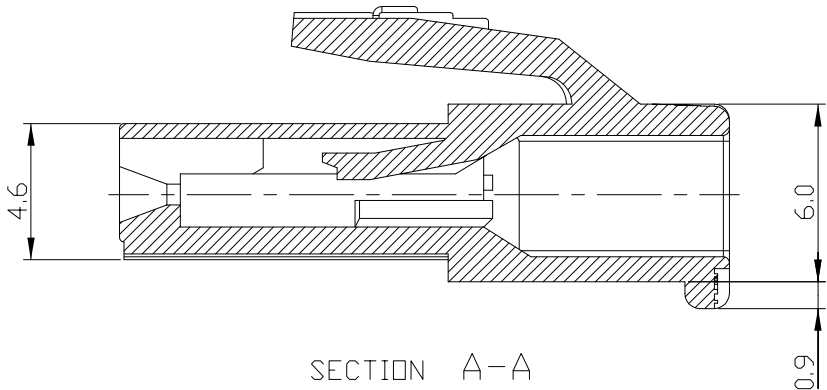
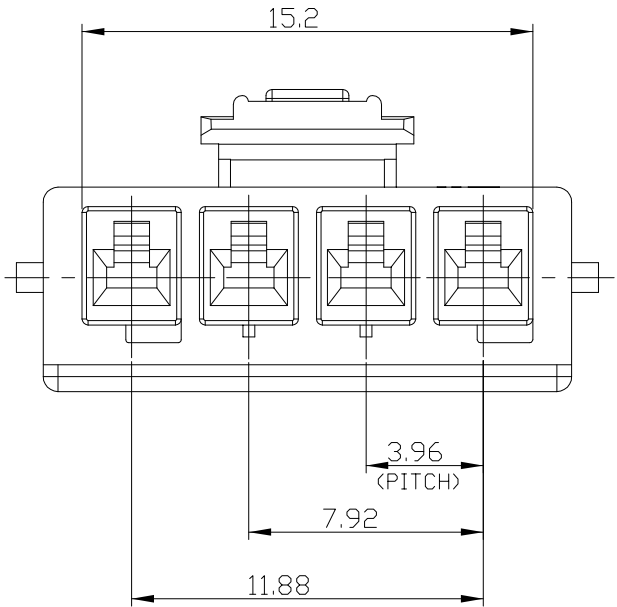


THIS DRAWING IS UNPUBLISHED.		RELEASED FOR PUBLICATION		20		REVISIONS							
© COPYRIGHT 20		BY TYCO ELECTRONICS CORPORATION. ALL RIGHTS RESERVED.				LOC DS	DIST —	P	LTR	DESCRIPTION	DATE	DWN	APVD
									A	RELEASED	01.OCT'09	SC	JK

NOTE;
1.APPLICABLE CONTACT P/N
-REC CONTACT:177915- □(AWG#16-#20)
:177914- □(AWG#22-#26)
2.MATING CONN.P/N
-TAB CONTACT:177917- □(AWG#16-#20)
177916- □(AWG#22-#26)
3.APPLICABLE DOUBLE LOCK PLATE:177920-1
*IT SHOULD BE USED CERTAINLY WHEN CABLE ASS'Y
4.GENERAL TOLERANCES:±0.3
5.ACCORDING TO IEC 60335-1 4.2 EDITION
-PART MEETS GWT 750°& 850°C.
-MATERIAL MEETS BALL PRESSURE TESTING AT 125°C.
-MATERIAL HAS CTI VALUE OF 250V.
△ MIN.THICKNESS OF INSULATING WALL

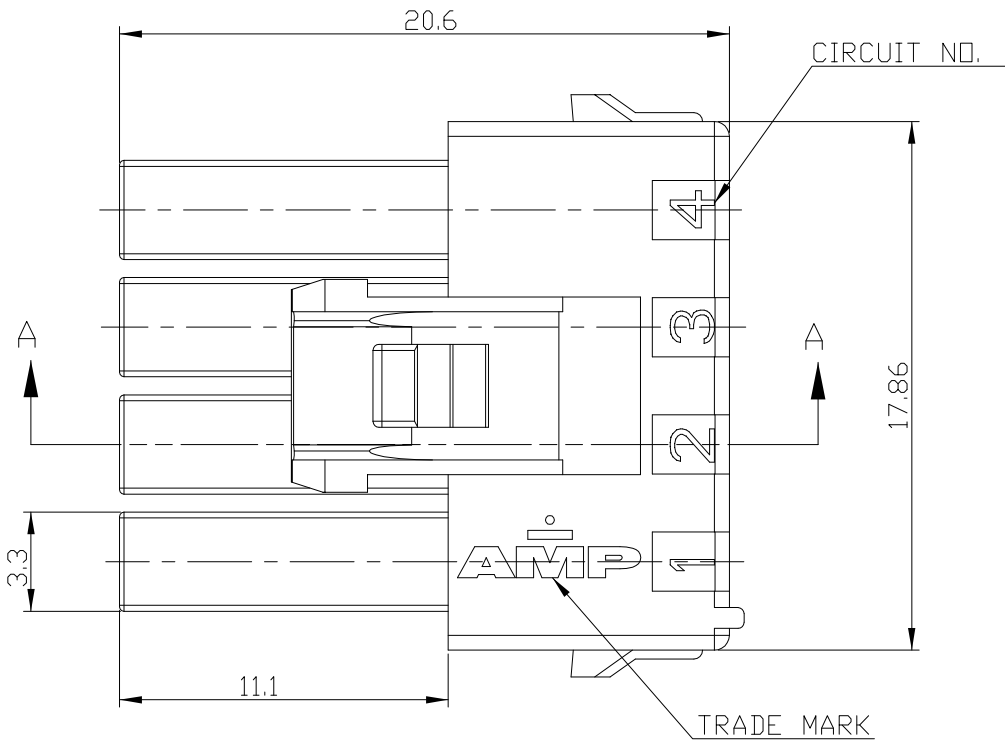

2005251-6	BLUE
2005251-4	YELLOW
2005251-1	NATURAL
P/N	COLOR

THIS DRAWING IS A CONTROLLED DOCUMENT FOR TYCO ELECTRONICS CORPORATION IT IS SUBJECT TO CHANGE AND THE CONTROLLING ENGINEERING ORGANIZATION SHOULD BE CONTACTED FOR THE LATEST REVISION.		DWN SC KIM CHK BW KANG APVD JK SONG PRODUCT SPEC 108-61106 APPLICATION SPEC - WEIGHT -		Tyco Electronics Kyungsan, Korea			
DIMENSIONS: mm	TOLERANCES UNLESS OTHERWISE SPECIFIED	NAME		PDL 4P PLUG HSG 3.96mm S/R (GWT)			
	0 PLC ±- 1 PLC ±0.1 2 PLC ±0.01 3 PLC ±0.001 4 PLC ±0.0001 ANGLES ±-	SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO		
MATERIAL PA66 (UL94V-0)	FINISH -	A300779	C-	2005251	-		
CUSTOMER DRAWING				SCALE 4:1	SHEET 1	OF 1	REV A