

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

Part Number:

0522710779

Status:

Active

Overview:

Description:

1.00mm (.039") Pitch FFC/FPC Connector, Right Angle, SMT, ZIF, Bottom Contact Style, 7 Circuits, Lead-free, High Barrier Packaging

EU RoHS

ELV and RoHS

Compliant

REACH SVHC

Contains SVHC: No

Halogen-Free

Status

Not Halogen-Free

China RoHS



Need more information on product environmental compliance?

Email productcompliance@molex.com
For a multiple part number RoHS Certificate of Compliance, [click here](#)

Please visit the [Contact Us](#) section for any non-product compliance questions.

Search Parts in this Series

52271Series

Agency Certification

CSA	LR19980
UL	E29179

General

Product Family	FFC/FPC Connectors
Series	52271
Overview	ffc_fpc_smt
Product Name	N/A

Physical

Circuits (Loaded)	7
Color - Resin	Natural
Contact Position	Bottom
Durability (mating cycles max)	30
Entry Angle	90° Angle
Flammability	94V-0
Mated Height (in)	0.118 In
Mated Height (mm)	3.00 mm
Material - Metal	Phosphor Bronze
Material - Plating Mating	Tin-Bismuth
Material - Plating Termination	Tin-Bismuth
Material - Resin	Nylon
Number of Rows	1
Orientation	Right Angle
PCB Locator	No
PCB Retention	Yes
Packaging Type	Embossed Tape on Reel
Pitch - Mating Interface (in)	0.039 In
Pitch - Mating Interface (mm)	1.00 mm
Polarized to PCB	Yes
Stackable	No
Temperature Range - Operating	-40°C to +85°C
Termination Interface: Style	Surface Mount
Wire/Cable Type	FFC/FPC

Electrical

Current - Maximum per Contact	0.5A
Voltage - Maximum	50V AC (RMS)/DC

Material Info


Reference - Drawing Numbers

Application Specification	AS-52271-001
Packaging Specification	SPK-52271-001, SPK-52271-002
Product Specification	PS-52271-053, RPS-52271-066, RPS-52271-067, RPS-52271-069, RPS-52271-070, RPS-52271-072, RPS-52271-073, RPS-52271-075, RPS-52271-080, RPS-52271-085, RPS-52271-087, RPS-52271-091
Sales Drawing	SD-52271-036, SD-52271-037

This document was generated on 06/04/2010

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION



ターミナル
TERMINAL

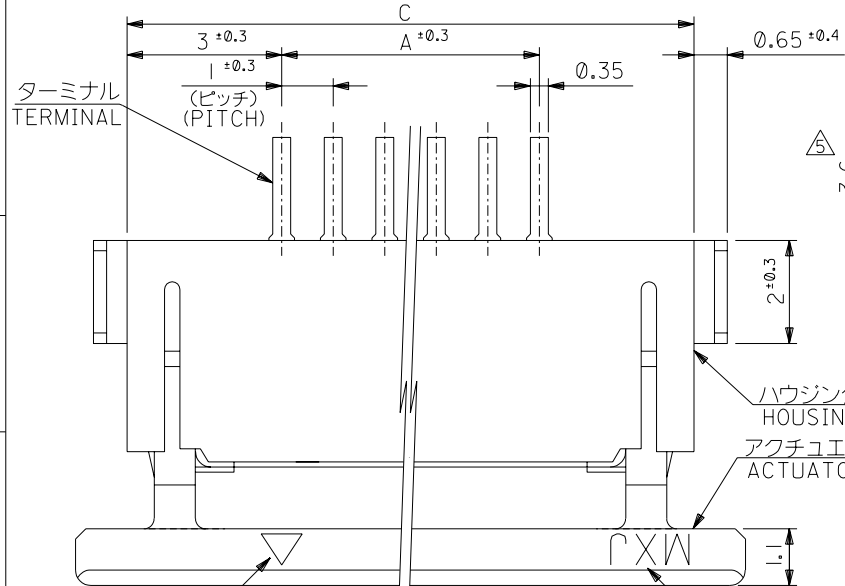


回路番号1用マーク
CKT. NO.1 MARK

トレードマーク
TRADE MARK
接点部 (下面)


CONTACT POINT (BOTTOM SIDE)

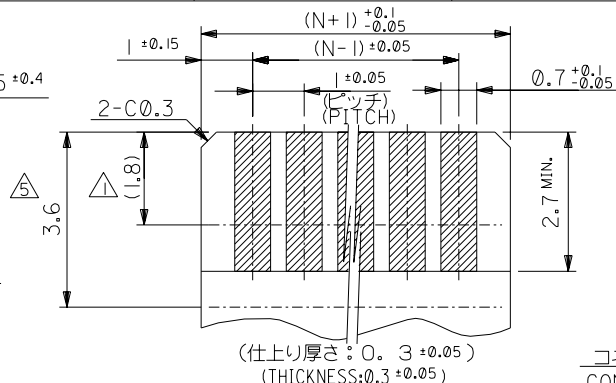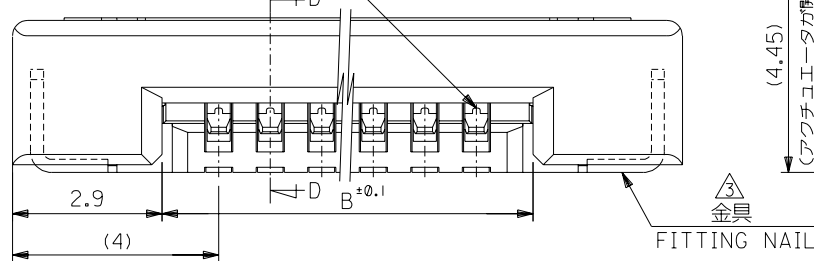

適合FPC推奨寸法
RECOMMENDED APPLICABLE
FPC LAYOUT
(7.15)

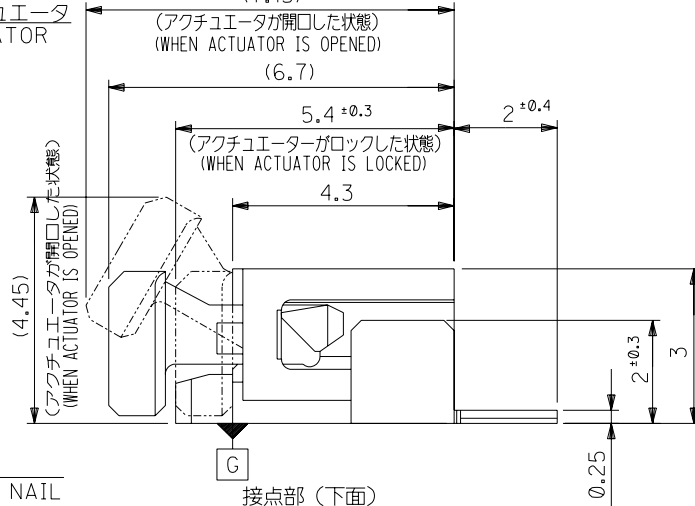


接点部 (下面)
CONTACT POINT (BOTTOM SIDE)



SECT. D-D

コネクタ位置
CONNECTOR
POSITION

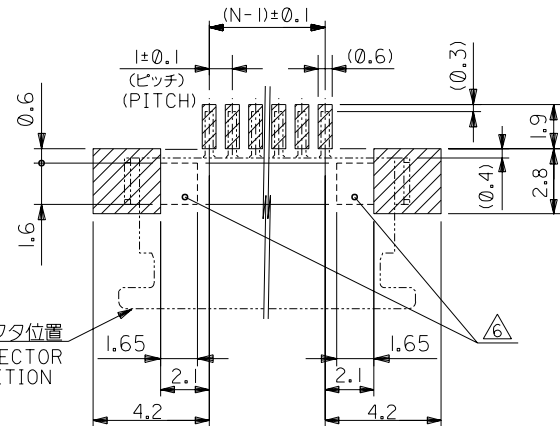

パターン推奨寸法 (参考)
RECOMMENDED PATTERN DIM. (REF.)

35	31.2	29	52271-3019	30
34	30.2	28	-2919	29
33	29.2	27	-2819	28
32	28.2	26	-2719	27
31	27.2	25	-2619	26
30	26.2	24	-2519	25
29	25.2	23	-2419	24
28	24.2	22	-2319	23
27	23.2	21	-2219	22
26	22.2	20	-2119	21
25	21.2	19	-2019	20
24	20.2	18	-1919	19
23	19.2	17	-1819	18
22	18.2	16	-1719	17
21	17.2	15	-1619	16
20	16.2	14	-1519	15
19	15.2	13	-1419	14
18	14.2	12	-1319	13
17	13.2	11	-1219	12
16	12.2	10	-1119	11
15	11.2	9	-1019	10
14	10.2	8	-0919	9
13	9.2	7	-0819	8
12	8.2	6	-0719	7
11	7.2	5	-0619	6
10	6.2	4	-0519	5
9	5.2	3	52271-0419	4

52271-**-19	C	B	A	52271-0419	極数 CKT.
MODEL NO.				MATERIAL NO.	

						材料 MATERIAL			注記参照 SEE NOTES			molex MOLEX-JAPAN CO.,LTD. 日本モレックス株式会社		
						仕上げ FINISH			注記参照 SEE NOTES					
						適用電線範囲 WIRE RANGE			— / —					
						被覆外径 INS. RANGE			— / —					
角度 ANGLE			±3°						適用電線範囲 WIRE RANGE			TITLE 名称 1.0 FPC CONN. Z.I.F. SMT (BOTTOM CONTACT)		
30 以上 OVER			±0.3			B 変更 REVISIED (J2004-3551)			H.K. 04/04/08			-LEAD FREE-		
10 以上 30 未満 UNDER			±0.25			A 変更 REVISIED (J2004-3371)			H.K. K.T 04/03/25					
10 未満 UNDER			±0.2			O 新規作成 RELEASED (J2004-3059)			H.K. 04/03/12					
一般公差 GENERAL TOLERANCES			記号 LTR 変更内容 REVISION RECORD			DR. CHK. 日付 DATE			DRAWN BY 04/03/12 H.KAWABATA			CHK'D BY 04/03/12 K.TOJO		
									APP'D BY 04/03/12 M.SASAO			尺度 SCALE — / —		
												DWG. NO. (SHEET 1 OF 2) REV B		
												SD-52271-036		

角度 ANGLE	±3°				
30 以上 OVER	±0.3	B	変更 REVISD	(2004-3551)	H.K. K.S. 04/04/02
10 以上 30 未満 UNDER	±0.25	A	変更 REVISD	(2004-3371)	H.K. K.S. 04/03/29
10 未満 UNDER	±0.2	0	新規作成 RELEASED	(2004-3059)	H.K. K.S. 04/03/12
一般公差 GENERAL TOLERANCES					

E

D

1:MM DIMENSIONS IN METRIC DO NOT SCALE DRAWING

A

8

7

6


5

4

3

2

1

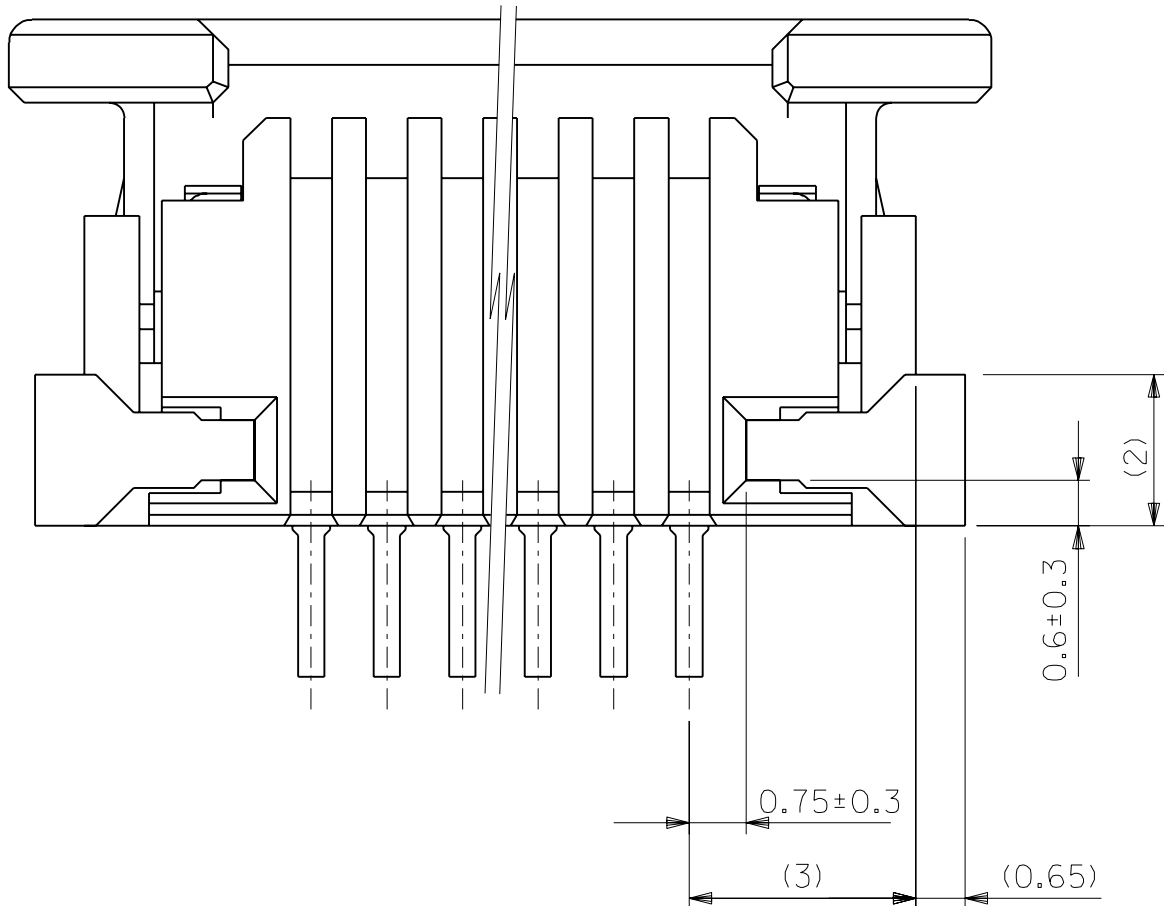

注記 NOTES

- ① 接点部までの嵌合長さ。
LENGTH TO CONTACT POINT.
2. 使用材料 MATERIAL
ハウジング : 46ナイロン, UL94V-0
HOUSING : 46NYLON, UL94V-0
アクチュエータ : PPS, UL94V-0
ACTUATOR : PPS, UL94V-0
ターミナル : リン青銅 (t=0.25)
TERMINAL : PHOS-BRO.(t=0.25)
メッキ : 錫ビスマスメッキ 1.0マイクロメートル以上
PLATING : TIN-BISMUTH 1.0 MICROMETER MINIMUM
: ニッケル下地 1.0マイクロメートル以上
PLATING : NICKEL(UNDER PLATING)1.0 MICROMETER MINIMUM
金具 : 銅合金 (t=0.25)
FITTING NAIL : COPPER ALLOY (t=0.25)
メッキ : 錫メッキ 1.0マイクロメートル以上
PLATING : TIN 1.0 MICROMETER MINIMUM
: ニッケル下地 1.0マイクロメートル以上
PLATING : NICKEL(UNDER PLATING) 1.0 MICROMETER MINIMUM
- ③ パターンはくり止め用金具
FITTING NAIL FOR PREVENTION OF PEELING OF P.C.B.PATTERN.
4. エンボステープ梱包時は、アクチュエータがロックした状態とする。
WHEN CONNECTOR IS SHIPED, ACTUATOR SHOULD BE LOCKED.
- ⑤ FPC挿入深さ。
INSERTION DEPTH OF FPC
- ⑥ パターン書き込み禁止エリア。
NO FOOT PRINT AREA.
7. 本製品は52271-**-17の鉛フリー品である。
THIS PRODUCT IS LEAD FREE OF 52271-**-17.

FPCについて：
打抜き方向は導体側から補強板側を推奨致します。
補強フィルム材質はポリイミドを推奨致します。
接着剤は熱硬化接着剤を推奨致します。

ABOUT FPC:
RECOMMENDED PUNCHER DIRECTION :FROM CONDUCTOR SIDE TO STIFFENER BOARD SIDE.
RECOMMENDED MATERIAL :
STIFFENER FILM :POLYIMIDE
BONDING AGENT :THERMOSETTING BONDING AGENT

				MODEL NO.		52271-**-19	
				材料 MATERIAL	注記参照 SEE NOTES	molex MOLEX-JAPAN CO.,LTD. 日本モレックス株式会社	
				仕上げ FINISH	注記参照 SEE NOTES	REVISE ONLY ON CAD SYSTEM	
				適用電線範囲 WIRE RANGE	—//—	TITLE 名称 1.0 FPC CONN. Z.I.F. SMT (BOTTON CONTACT) -LEAD FREE-	
				被覆外径 INS. RANGE	—//—	DWG. NO. (SHEET 2 OF 2) REV SD-52271-036 B	
				DRAWN BY '04/03/12 H.KAWABATA	CHK'D BY '04/03/12 K.TOJO		
				APP'D BY '04/03/12 M.SASAO	尺度 SCALE —//—		
角度 ANGLE	±3°			記号 LTR	変更内容 REVISION RECORD	DR. CHK.	日付 DATE
30 以上 OVER	±0.3	B	変更 REVISED (J2004-355)	H.K.	K.T.	04/04/02	
10 以上 30 未満 OVER UNDER	±0.25	A	変更 REVISED (J2004-337)	H.K.	K.T.	04/03/29	
10 未満 UNDER	±0.2	O	新規作成 RELEASED (J2004-3059)	H.K.	K.T.	04/03/12	
一般公差 GENERAL TOLERANCES							

8

7

6

5

4

3

2

1

F

E

D

C

B

A

F






E

D

C

B

A

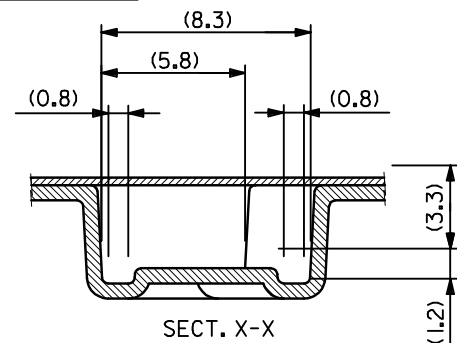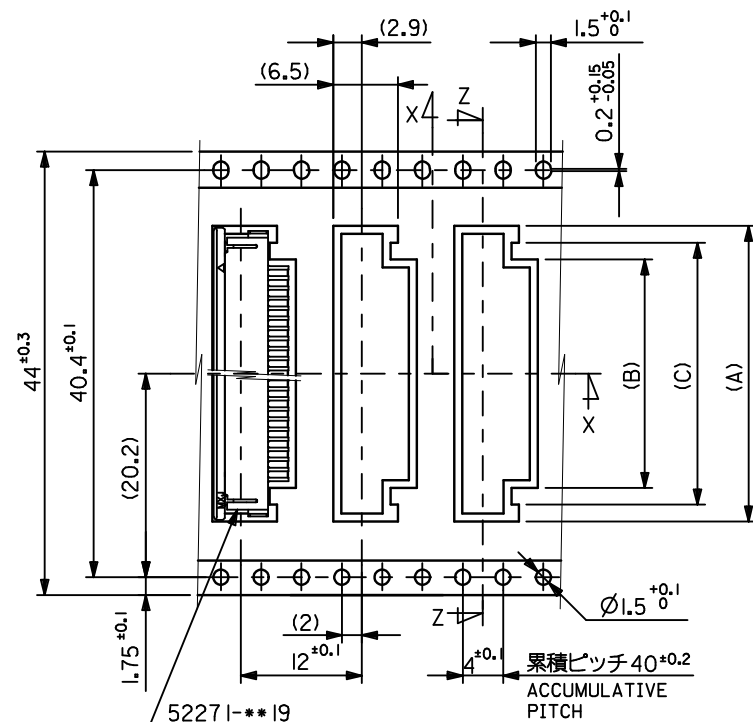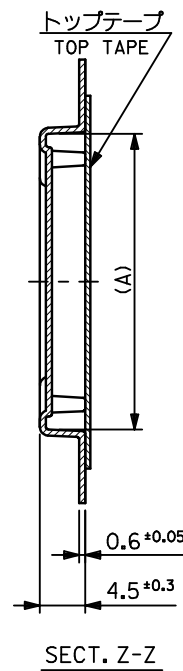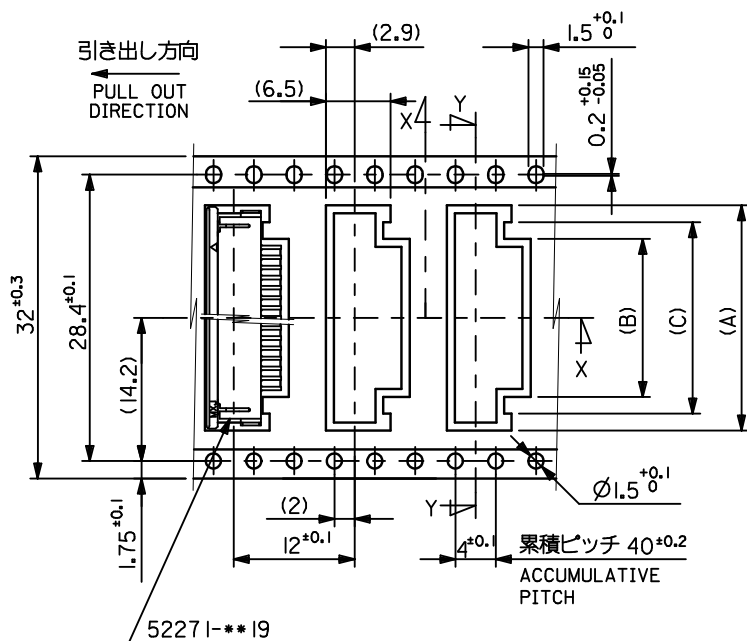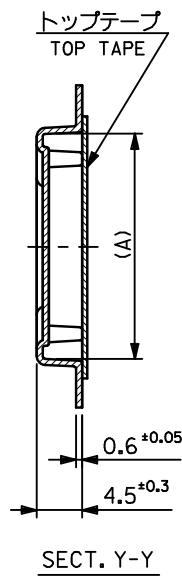

44	49.4	45.4	31	27.4	34.35	52271-2779	27
			30	26.4	33.35	-2679	26
			29	25.4	32.35	-2579	25
			28	24.4	31.35	-2479	24
			27	23.4	30.35	-2379	23
			26	22.4	29.35	-2279	22
			25	21.4	28.35	-2179	21
			24	20.4	27.35	-2079	20
			23	19.4	26.35	-1979	19
			22	18.4	25.35	-1879	18
			21	17.4	24.35	-1779	17
			20	16.4	23.35	-1679	16
			19	15.4	22.35	-1579	15
			18	14.4	21.35	-1479	14

32	37.4	33.4	17	13.4	20.35	-1379	13
16	12.4	19.35	52271-1279	12			
キャリアテープ幅	E	D	(C)	(B)	(A)	MATERIAL NO.	電 装 部 品 記 号
CARRIER TAPE WIDTH							

REVISED EC NO: J2009-2061 2009/05/20 DRWN:TKON CHKD:MATSUMOTO 2009/05/21 APPR:NUKITA 2009/05/21 A	DESCRIPTION	GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE MM ONLY		SCALE ---	DESIGN UNITS METRIC	 THIRD ANGLE PROJECTION
		10 UNDER	±0.2	DRAWN BY	DATE	TITLE EMBOSSD TAPE PACKAGE FOR 52271-**-19 -LEAD FREE-		
		10 OVER 30 UNDER	±0.25	CHECKED BY	DATE			
		30 OVER	±0.3	APPROVED BY	DATE			
		ANGULAR	±3°	MATERIAL NO.				
	REV	DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		SEE TABLE		DOCUMENT NO. SD-52271-037		SHEET NO. 2 OF 3
THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION								

10 9 8 7 6 5 4 3 2 1

F

E

D

C

B

A

F



E

D

C

B

A

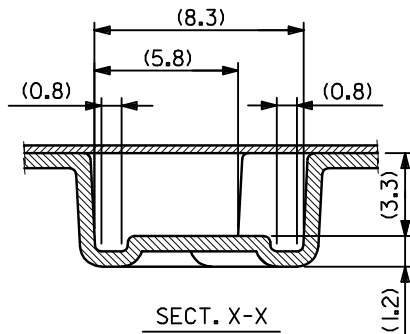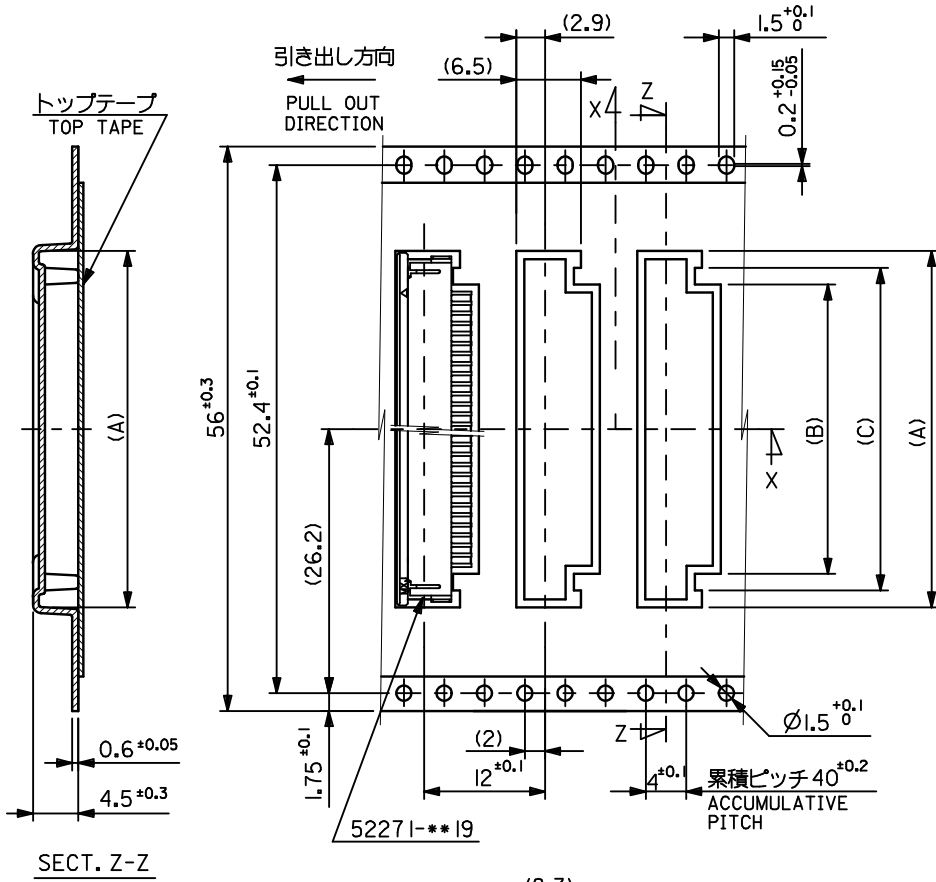

56	61.4	57.4	34	30.4	37.35	5227I-3079	30
			33	29.4	36.35	5227I-2979	29
			32	28.4	35.35	5227I-2879	28
キャリアテープ幅 CARRIER TAPE WIDTH	E	D	(C)	(B)	(A)	MATERIAL NO.	標 数 CKT.

tb_frame_A3_J_ME_S
Rev. E 2006/04/15

9

8

7

6

5

4

3

2

EN-02JA(021)

REVISED
EC NO: J2009-2061
2009/05/20
DRWN:TKN
CH'KD:HMATSUMOTO
2009/05/21
APPR:NUKITA
2009/05/21

DESCRIPTION
REV

GENERAL TOLERANCES
(UNLESS SPECIFIED)

10 UNDER	±0.2
10 OVER 30 UNDER	±0.25
30 OVER	±0.3

ANGULAR ±3°
DRAFT WHERE APPLICABLE
MUST REMAIN
WITHIN DIMENSIONS

DIMENSION STYLE
MM ONLY

DRAWN BY	DATE
H.KAWABATA	2004/03/12
CHECKED BY	DATE
K.TOJO	2004/03/12
APPROVED BY	DATE
M.SASAO	2004/03/12

MATERIAL NO.

SEE TABLE

SIZE
A3

SCALE

DESIGN UNITS
METRIC

THIRD ANGLE
PROJECTION

EMBOSSD TAPE PAKEGE
FOR 5227I-***19
-LEAD FREE-



MOLEX INCORPORATED

DOCUMENT NO.

SD-5227I-037

SHEET NO.

3 OF 3

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX
INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION