


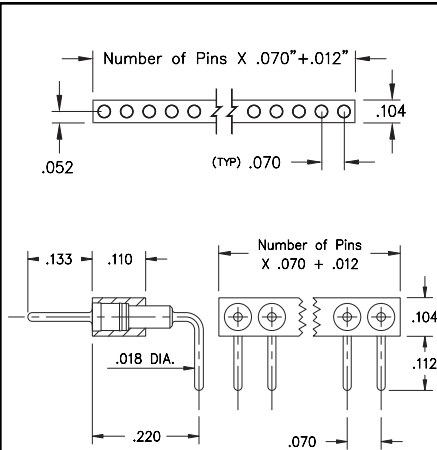


Fig. 1

- Series 870 use MM #3790-0 pins. See page 176 for details.
- Series 871 use MM #1805 receptacles and accept pin diameters from .015" - .025". See page 140 for details.
- Receptacles use Hi-Rel, 6 finger BeCu #43 contact rated at 3 amps. See page 220 for details.
- Insulators are high temp. thermoplastic.

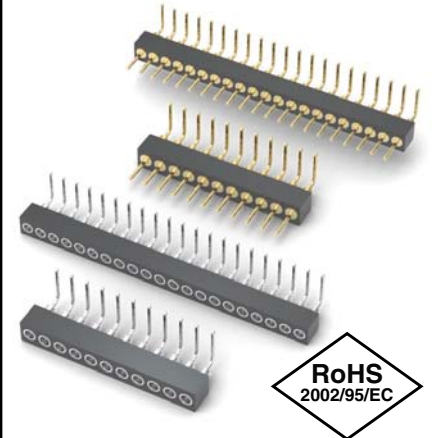

Ordering Information

Fig. 1

Series 870...20-001 Right Angle Pin Header

870-10-0__-20-001000

Specify # of pins → **02-21**

For Electrical, Mechanical & Environmental Data, See pg. 4

XX=Plating Code See Below

For RoHS compliance select ◇ plating code.

SPECIFY PLATING CODE XX=	10 ◇			
Pin Plating	10μ" Au			

Fig. 2

Fig. 2

Series 871...20-001 Right Angle Socket

871-43-0__-20-001000

Specify # of pins → **02-21**

For Electrical, Mechanical & Environmental Data, See pg. 4

XX=Plating Code See Below

For RoHS compliance select ◇ plating code.

PLATING CODE =						43 ◇	
Sleeve (Pin)						200μ" Sn	
Contact (Clip)						30μ" Au	