
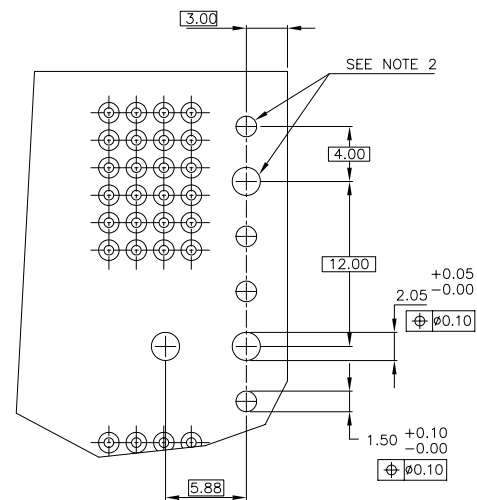
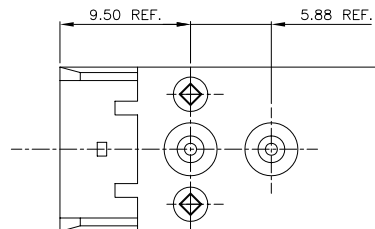

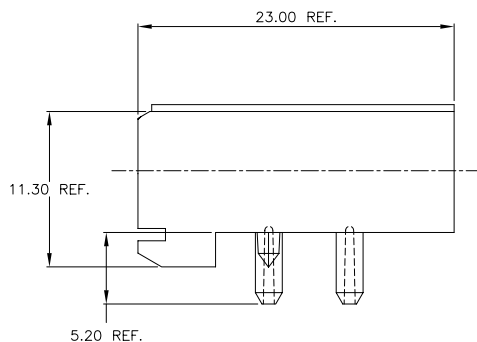


PRODUCT NUMBER	DESCRIPTION
88917-101 & -101LF	HEAT STAKE VERSION

FRONT VIEW



REQUIRED PC BOARD LAYOUT COMPONENT SIDE

NOTE:

- HOUSING MATERIAL: LCP, 30% GLASS FILLED
FLAME RETARDANT PER UL 94V-0.
COLOR: NATURAL
- INDICATED HOLES ARE UNPLATED
- PART NUMBER WITH "LF" SUFFIX AT THE END ARE LEAD FREE OPTION
- THIS PRODUCT MEETS EUROPEAN UNION DIRECTIVES AND OTHER
COUNTRY REGULATION AS DESCRIBED IN GS-22-008.
- THE HOUSING WILL WITHSTAND EXPOSURE TO 260°C PEAK
TEMPERATURE FOR 15 SECONDS IN A WAVE SOLDER APPLICATION
WITH A 1.5mm MINIMUM THICK CIRCUIT BOARD OR FOR 10-20
SECONDS IN A CONVECTION, INFRA-RED OR VAPOR PHASE REFLOW
OVEN. SEE APPLICATION NOTES/PROCEDURES IF THEY ARE AVAILABLE.





mat'l. code SEE NOTES				surface ISO 1302 ✓	tolerance ISO 406 ISO 1101	projection mm	product family METRAL ACC.
ltr	ecn	no	dr	date	tolerances unless otherwise specified		title
F	C80040	MDF		7/23/98	angles	xx ±.01/.3	RECEPTACLE GUIDE MODULE, 4 ROW
G	H80473	MDF		7/23/98	linear	xxx ±.005/.13	
H	V02701	JWS		10/19/00	0°±2'	xxxx ±.0020/.050	scale 1:1
J	V11668	LSS		6/13/01	dr	S. STONER	9/30/93
K	V12868	CGD		1/02/02	enr	R. DOUTRICH	9/30/93
L	M05-0262	MHT		12/20/05	chr	S. STONER	9/30/93
M	M06-0286	MNR		7/27/06	appd	S. STONER	9/30/93
sheet	revision	M	M	M	M		
index	sheet	1	2	3	4		

88917

type Product Customer Drawing

PRODUCT NUMBER	DESCRIPTION
88917-201 & -201LF	PRESS-PEG VERSION

FRONT VIEW

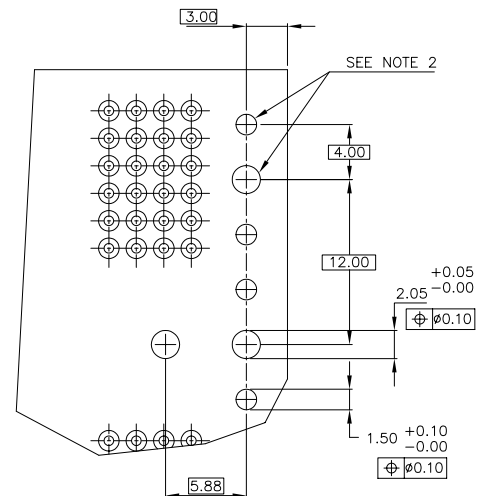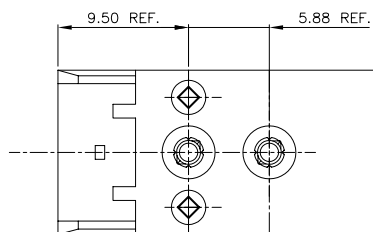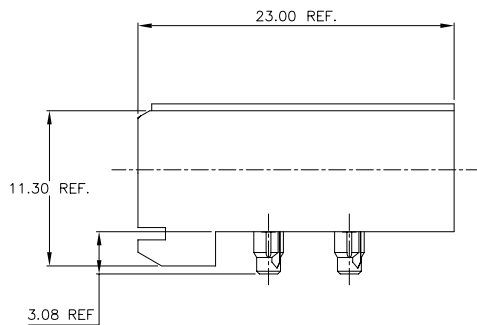


REQUIRED PC BOARD LAYOUT
COMPONENT SIDE

NOTE:




- HOUSING MATERIAL: LCP, 30% GLASS FILLED
FLAME RETARDANT PER UL 94V-0.
COLOR: NATURAL
- INDICATED HOLES ARE UNPLATED
- PART NUMBER WITH "LF" SUFFIX AT THE END ARE LEAD FREE OPTION
- THIS PRODUCT MEETS EUROPEAN UNION DIRECTIVES AND OTHER
COUNTRY REGULATION AS DESCRIBED IN GS-22-008.
- THE HOUSING WILL WITHSTAND EXPOSURE TO 260°C PEAK
TEMPERATURE FOR 15 SECONDS IN A WAVE SOLDER APPLICATION
WITH A 1.5mm MINIMUM THICK CIRCUIT BOARD OR FOR 10-20
SECONDS IN A CONVECTION, INFRA-RED OR VAPOR PHASE REFLOW
OVEN. SEE APPLICATION NOTES/PROCEDURES IF THEY ARE AVAILABLE.

mat'l. code SEE NOTES				surface ISO 1302 ✓	tolerance ISO 406 ISO 1101	projection mm	product family METRAL ACC.
ltr	ecn	no	dr	date	tolerances unless otherwise specified		title
M					angles	linear	RECEPTACLE GUIDE MODULE, 4 ROW
					0°±2'	xxx ±.01/.3 xxx ±.005/.13 xxxx ±.0020/.050	mm
					dr	S. STONER 9/30/93	scale 1:1
					enr	R. DOUTRICH 9/30/93	FCI
					chr	S. STONER 9/30/93	dwg no 88917 sheet 2 of 4 size A3
					appd	S. STONER 9/30/93	type Product Customer Drawing
sheet index	revision sheet						

PRODUCT #	DESCRIPTION
88917-301 & -301LF	SCREW DOWN VERSION




– SCREW DOWN
VERSION

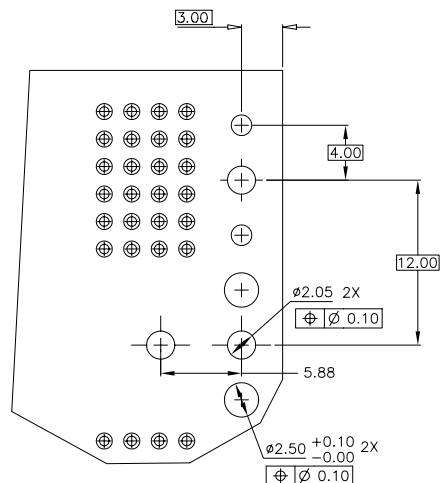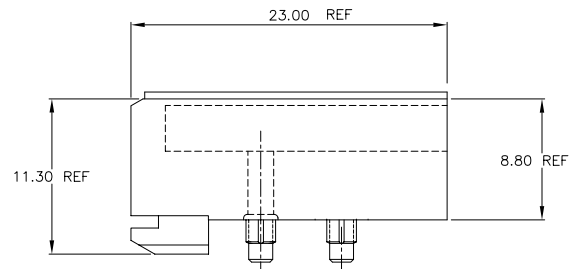

REQUIRED PC BOARD LAYOUT COMPONENT SIDE

4. PART NUMBER WITH "LF" SUFFIX AT THE END ARE LEAD FREE OPTION
5. THIS PRODUCT MEETS EUROPEAN UNION DIRECTIVES AND OTHER COUNTRY REGULATION AS DESCRIBED IN GS-22-008.
6. THE HOUSING WILL WITHSTAND EXPOSURE TO 260°C PEAK TEMPERATURE FOR 15 SECONDS IN A WAVE SOLDER APPLICATION WITH A 1.5mm MINIMUM THICK CIRCUIT BOARD OR FOR 10-20 SECONDS IN A CONVECTION, INFRA-RED OR VAPOR PHASE REFLOW OVEN. SEE APPLICATION NOTES/PROCEDURES IF THEY ARE AVAILABLE.

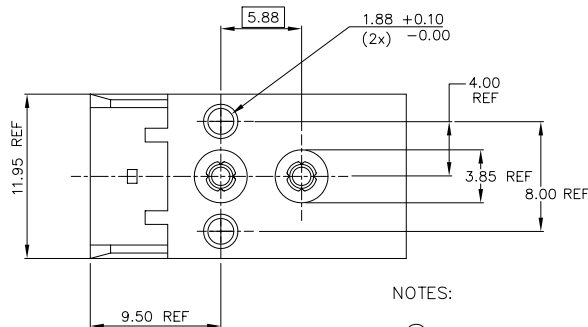





NOTES:

- ① HOUSING MATERIAL: LCP, 30% GLASS FILLED
FLAME RETARDANT PER UL 94V-0.
COLOR: NATURAL
2. TWO MOUNTING SCREWS, P/N 63787-001, FOR MAX
PCB THICKNESS 2.4mm [0.094"].
OR P/N 63787-002 FOR MAX PCB THICKNESS 3.2mm [0.126"].
MUST BE ORDERED SEPARATELY
3. THE MATING CONNECTOR FOR THIS APPLICATION MUST USE A
WALL-LESS HEADER HOUSING, P/N 63735-101, TO AVOID
INTERFERENCE WITH MOUNTING SCREW HEADS.

[illegible]

PRODUCT #	DESCRIPTION
88917-401 & -401LF	CLAW RETENTION VERSION

FRONT VIEW

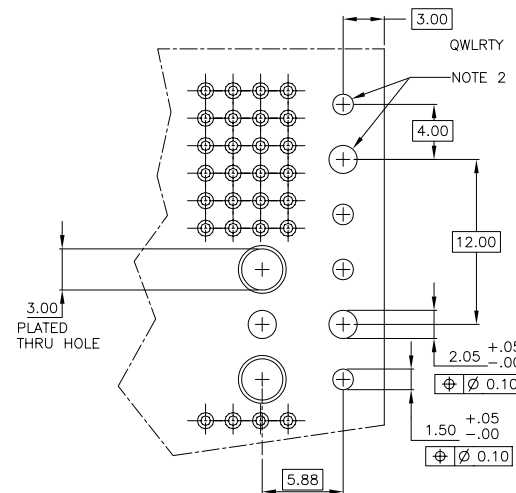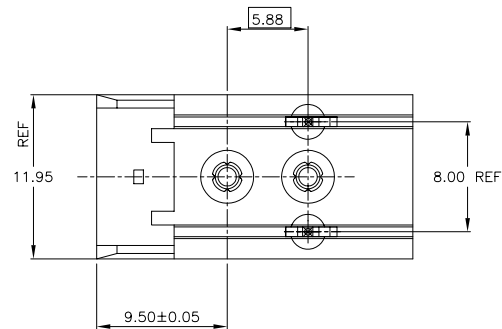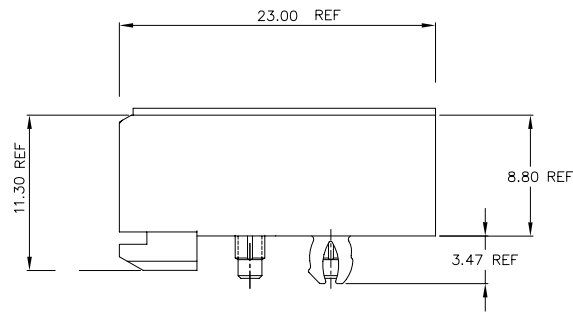

REQUIRED P.C. BOARD LAYOUT
COMPONENT SIDE

NOTES:

- HOUSING MATERIAL: LCP, 30% GLASS FILLED
FLAME RETARDANT PER UL 94V-0.
COLOR: NATURAL
- INDICATED HOLES ARE UNPLATED.

③ PART NUMBER WITH "LF" SUFFIX AT THE END ARE LEAD FREE OPTION

- THIS PRODUCT MEETS EUROPEAN UNION DIRECTIVES AND OTHER COUNTRY REGULATION AS DESCRIBED IN GS-22-008.
- THE HOUSING WILL WITHSTAND EXPOSURE TO 260°C PEAK TEMPERATURE FOR 15 SECONDS IN A WAVE SOLDER APPLICATION WITH A 1.5mm MINIMUM THICK CIRCUIT BOARD OR FOR 10-20 SECONDS IN A CONVECTION, INFRA-RED OR VAPOR PHASE REFLOW OVEN. SEE APPLICATION NOTES/PROCEDURES IF THEY ARE AVAILABLE.

mat'l. code SEE NOTES				surface ISO 1302 ✓	tolerance ISO 406 ISO 1101	projection mm	product family METRAL ACC.
ltr	ec	no	dr	date	tolerances unless otherwise specified		title
M					angles	linear	RECEPTACLE GUIDE MODULE, 4 ROW
					0°±2'	xxx ±.01/.3 xxx ±.005/.13 xxxx ±.0020/.050	mm
					dr	S. STONER 9/30/93	scale 1:1
					enr	R. DOUTRICH 9/30/93	FCI
					chr	S. STONER 9/30/93	dwg no 88917 sheet 4 of 4 size A3
					appd	S. STONER 9/30/93	type Product Customer Drawing
sheet index	revision sheet						