


Feature -

water proof IP67 sealed
medium size,
bi-color LED illuminated available
long electrical life cycles
SMT and vertical PCB terminal

Application -

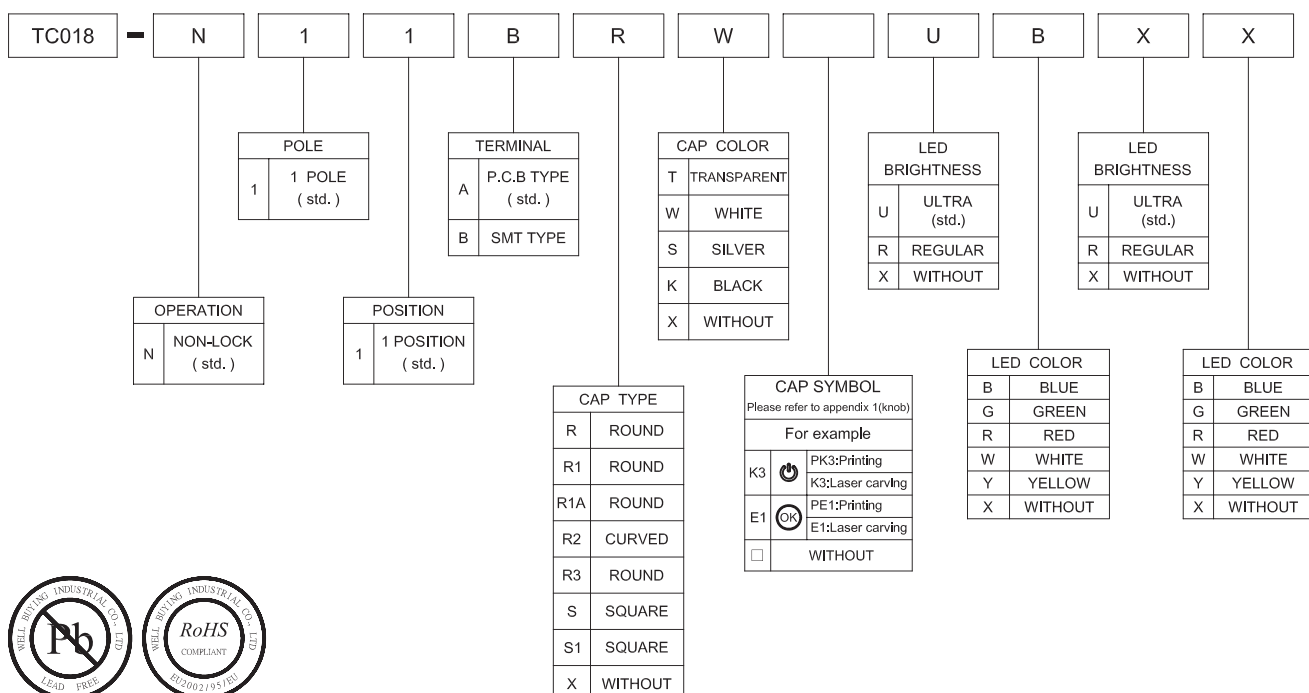
consumer products
computer products
instrumentation
communication equipments

SPECIFICATIONS

SWITCH SPECIFICATIONS	
POLE - POSITION	1P1T , with LED
CONTACT RATING	24 V DC , 50 mA
CONTACT RESISTANCE	50 mΩ MAX. 1.5 V DC ; 100 mA , by Method of Voltage DROP
INSULATION RESISTANCE	100 MΩ MIN. 500 V DC
DIELECTRIC STRENGTH	Breakdown is not Allowable ; 500 V AC for 1 Minute
OPERATING FORCE	300 ± 100 gf
OPERATING LIFE	1,500,000 cycles
OPERATING TEMPERATURE RANGE	-30°C ~ 85°C
TOTAL TRAVEL	1.0 ± 0.3 mm
SEALING	IP67

LED SPECIFICATIONS							
 ATTENTION LEDs are Electrostatic Sensitive devices		Unit	Value / LED Color				
			Blue	Green	Red	White	Yellow
FORWARD CURRENT	If	mA	30	30	15	30	20
REVERSE VOLTAGE	Vr	V	5.0	5.0	5.0	5.0	5.0
REVERSE CURRENT	Ir	μA	10	10	10	10	10
FORWARD VOLTAGE@20mA	Vf	V	3.5-4.0	1.7-2.8	1.7-2.8	3.3-3.8	1.7-2.8
LUMINOUS INTENSITY@10mA	Iv	mcd	@20mA 180-245	24-40	4.0-7.0	@20mA 145	18-30

Physical and electrical information of LED will be provided upon customer's request on switches .

HOW TO ORDER


▶ FRAME TYPE OPTION		▶ CAP TYPE
TC018-N11AXX □ □ □ □	TC018-N11BXX □ □ □ □	TC018-N11ART □ □ □ □
TC018-N11AR1T □ □ □ □	TC018-N11AR1AT □ □ □ □	TC018-N11AST □ □ □ □
TC018-N11AS1T □ □ □ □	TC018-N11AR2T □ □ □ □	TC018-N11AR3T □ □ □ □
▶ CIRCUIT	▶ P.C.B LAYOUT	
SINGLE LED COLOR 1 ○ —○— 4 3 ○ —○— 2 DUAL LED COLOR 1 ○ —○— 4 3 ○ —○— 2	SMT TYPE	P.C.B. TYPE
▶ MATERIAL		
■ ACTUATOR - PA ■ TERMINAL - BRASS SILVER PLATING		■ FRAME - PA ■ SPRING - STAINLESS STEEL

	0	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19
A	0	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19
B	A	B	C	D	E	F	G	H	I	J	CH5	CH6	DSK	PIP	C-KEY	CUT	TAKE	REC	ENG	PROD
C	K	L	M	N	O	P	Q	R	S	T	REPLAY	RET1	RET2	KEY ON	AUTO TAKE					
D	U	V	W	X	Y	Z	POWER	ON OFF	ON	OFF		USER A	USER B	USER C	USER D	USER E	USER F	USER G	USER H	USER I
E	OK		Auto	Enter	Start	STOP	OPEN	CLOSE	Exit	Move	USER J								M-1	
F	SET	Reset	Light	Alarm	Menu	Next	Back	Delete	Motor	Save										
G	Up	Down	Right	Left	Test	End	Insert	Lock	Print	+/-										
H	ESC	BC	HOME	Health	D-LED 2	OC GENIE	VIDEO INPUT	clr CMOS	Green Power	Save OK										
I	B/R	Undo Cancel	T/L	F1	F2	F3	F4	F5	F6	F7										
J	F8	F9	F10	F11	F12	F13	F14	IN 1	IN 2	IN 3										
K	IN 4	IN 5	IN 6																	
L	+	-	x	÷	=	↑	→	▲	▶	⏸										
M						↑	→	↑	⇒											
N	↑	→	▲	◀	▶	◀	▶	◀	▶											
O																				
P							Config	TIME LINE	ME1	ME2										
Q	ME3	ME4	BGND 3D DVE1	BGND 3D DVE2	BUS COLOR	ME BUTTON LINK	*	INSERT	WIPE											
R	⏮	ALL		VP		COPY		RECORD MODE	↑											
S			MUTE																	
T			group																	
U			chair																	
V			OC			CLEAR	CROSS WIND	AMMO TEMP	BARO PRESS	AIR TEMP										
W	BORE-SIGHT	CANT	LEAD	RANGE	MRS	ZERO	TEST	UD	LR											
X	ID	Disp		GALL		BAND	SETUP	MODE	LINK	FUNC										
Y	SHIFT					DEL														
Z				RUN	2D	3D	CH1	CH2	CH3	CH4										