

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

Part Number:

0761657606

Status:

Active

Overview:

Impact™ Backplane Connector and Cable Assembly System

Description:

Impact™ 100 Ohm 3 Pair Vertical Backplane Header, Left Guide, Right Endwall, 16 Columns, 144 Circuits, Pin Length 4.50mm, Plated Through Hole Dimension 0.39mm, Lead-Free

Documents:

3D Model

Drawing (PDF)

Product Specification PS-76060-999 (PDF)

Application Specification AS-76060-990 (PDF)

RoHS Certificate of Compliance (PDF)

Agency Certification

UL

E29179

General

Product Family

Series

Application

Application Tooling Documents

Component Type

Overview

Backplane Connectors

76165

Conventional

TM-622018799

PCB Header

Impact™ Backplane Connector and Cable Assembly System

Product Name

UPC

Impact™

883906401979

Physical

Circuits (Loaded)

Circuits (maximum)

Color - Resin

Durability (mating cycles max)

First Mate / Last Break

Flammability

Guide to Mating Part

Keying to Mating Part

Material - Metal

Material - Plating Mating

Material - Plating Termination

Material - Resin

Net Weight

Number of Columns

Number of Pairs

Number of Rows

Orientation

PC Tail Length

PCB Locator

PCB Retention

PCB Thickness - Recommended

Packaging Type

Pitch - Mating Interface

Pitch - Termination Interface

Plating min - Mating

Polarized to PCB

Temperature Range - Operating

Termination Interface: Style

144

144

Black

200

No

94V-0

Yes

None

High Performance Alloy (HPA)

Gold

Tin

High Temperature Thermoplastic

6.574/g

16

3

9

Vertical

1.40mm

No

None

1.00mm

Tray

1.90mm

1.90mm


0.762µm

Yes

-55°C to +85°C

Through Hole - Compliant Pin

Electrical

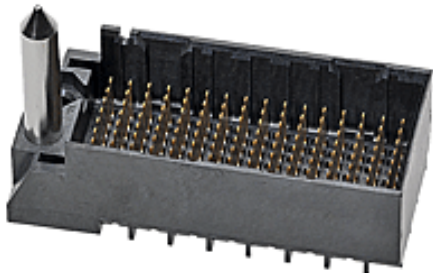

Series image - Reference only

EU ELV

Not Relevant

EU RoHS

China RoHS

Compliant

REACH SVHC

Contains SVHC(2014 December 17): No

Halogen-Free

Status

Low-Halogen

Need more information on product environmental compliance?

Email productcompliance@molex.com
Please visit the [Contact Us](#) section for any non-product compliance questions.

China ROHS

Green Image

ELV

Not Relevant

Current - Maximum per Contact	0.75A	GbX-U™, I-Trac™, Impact™, or TinMan
Data Rate	25.0 Gbps	
Impedance	100#	
Shield Type	N/A	
Shielded	No	
Voltage - Maximum	30V AC (RMS)/DC	
Material Info		
Reference - Drawing Numbers		
Application Specification	AS-76060-990	
Electrical Model Document	EE-76170-0001	
Product Specification	PS-76060-999	
Sales Drawing	SD-76165-002	
Symbol/Footprint Data	SYM-76165-7606	

This document was generated on 07/02/2015

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION