

COIL: @ 25°C	
RESISTANCE	50 OHMS ±10%
NOMINAL VOLTAGE	5.0 VDC
MUST OPERATE	2.7 VDC
MUST RELEASE	1.4 VDC MAX, 0.22 VDC MIN.

ENVIRONMENT:


VIBRATION	10	CPS TO	3000	CPS @	30	g's
SHOCK	75	g's	6	MS. DURATION		
TEMPERATURE	-65	°C TO	+125	°C		

NOTES: OPERATE TIME 2.0 MS MAX
 RELEASE TIME 1.5 MS MAX
 CONTACT TIME 1.5 MS MAX.

CUST. C.I.
 CUST. NO. STANDARD REV.

SMGA RELAY

CUSTOMER DATA SHEET

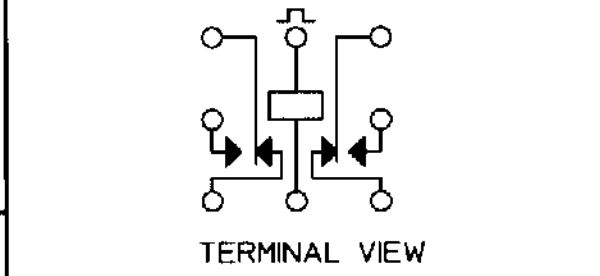

CONTACT RATING: LOW LEVEL TO 1 AMP
 28 VDC RESISTIVE 100,000 OPERATIONS

DR. B.D. 11/17/99 CK: [Signature] 11/17/99

COMMUNICATIONS INSTRUMENTS, INC.

SMGA-5