


REV.	DATE	DESCRIPTION
NC	10/20/05	INITIAL RELEASE

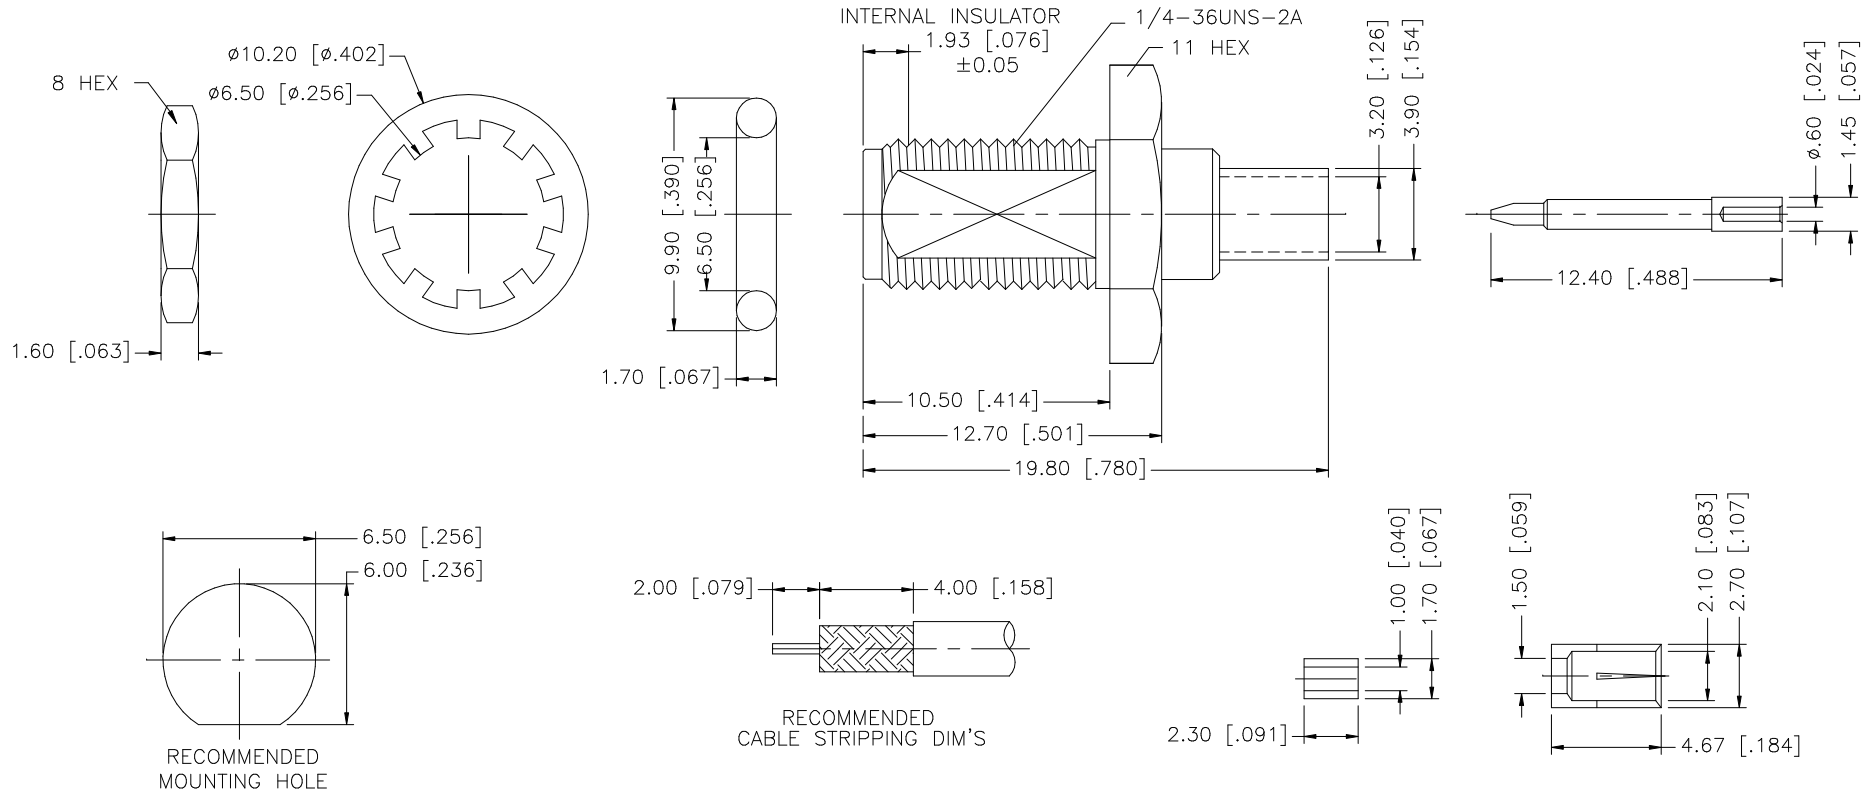

NOTES:

1. CRIMPED FERRULE
HEX CRIMP SIZE .128"
2. CONTACT PIN TO SOLDER.

8					UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS. DIMENSIONS IN [] ARE IN INCHES AND FOR CUSTOMER REFERENCE ONLY. UNLESS OTHERWISE SPECIFIED TOLERANCES FOR MILLIMETERS ARE: 0.5 - 8mm ± 0.20 mm 8 - 30mm ± 0.40 mm 30 - 120mm ± 0.50 mm UNLESS OTHERWISE SPECIFIED TOLERANCES FOR INCHES ARE: .020 - .315 = ± 0.007 " .315 - 1.180 = ± 0.015 " 1.180 - 4.724 = ± 0.020 "	APPROVALS	DATE	<h1 style="text-align: center; color: blue;">Amphenol Connex</h1>				
7	FERRULE	BRASS	GOLD	1		DRAWN	G.R.S.					10/20/05
6	HEX NUT	BRASS	GOLD	1		CHECKED			PART DESCRIPTION <h2 style="text-align: center;">SMA R/P BULKHEAD CRIMP JACK (FOR RG-178B/U, 196A/U CABLE)</h2>			
5	LOCK WASHER	BRASS	GOLD	1		ISSUED						
4	GASKET	SILICONE	RED	1		SHEET	1 OF 1		PART NO. <h2 style="text-align: center;">132286RP</h2>			
3	CONTACT PIN	BRASS	GOLD	1								
2	INSULATOR	TEFLON	NATURAL	1					DWG. NO. 132286RP.DWG			
1	BODY	BRASS	GOLD	1		CAD FILE	C:/132/132286RP.DWG					
	DESCRIPTION	MATERIAL	FINISH	QTY	DO NOT SCALE DRAWING							