



LDP40 SERIES

40 WATT OUTPUT

LED POWER SUPPLY



Features

- * 40W Single outputs
- * Universal AC input range 90-305Vac
- * Constant Current Design
- * Active PFC > 0.9
- * Low inrush current < 5A
- * Low profile with 25.2mm height and narrow 40mm width
- * Low frequency flicker design
- * Continuous short circuit protection
- * Over temperature protection
- * IP 67 Rated
- * Fully isolated plastic case
- * Dimming function: DALI / PWM / 1~10VDC / Potentiometer



| MODEL | Output Rated Voltage | Constant Current Region | Ripple and Noise(V p-p max.) ^{Note1} | Output Rated Current | No Load Output Voltage (max.) | Output Rated Power | %EFF. (typ.) |
|------------------|----------------------|-------------------------|---|----------------------|-------------------------------|--------------------|--------------|
| LDP40S240-C170BR | 24V | 9-24Vdc | 0.24V | 1700mA | 29Vdc | 40.80W | 86% |
| LDP40S240-C170B | 24V | 16-24Vdc | 2.0V | | | | 89% |
| LDP40S240-C140BR | 24V | 9-24Vdc | 0.24V | 1400mA | 29Vdc | 33.60W | 85% |
| LDP40S240-C140B | 24V | 16-24Vdc | 2.0V | | | | 88% |
| LDP40S360-C111BR | 36V | 9-36Vdc | 0.36V | 1110mA | 43Vdc | 40.00W | 86% |
| LDP40S360-C111B | 36V | 24-36Vdc | 2.7V | | | | 89% |
| LDP40S360-C105BR | 36V | 9-36Vdc | 0.36V | 1050mA | 43Vdc | 37.80W | 85% |
| LDP40S360-C105B | 36V | 24-36Vdc | 2.7V | | | | 88% |
| LDP40S480-C084BR | 48V | 9-48Vdc | 0.48V | 840mA | 56Vdc | 40.32W | 88% |
| LDP40S480-C084B | 48V | 32-48Vdc | 4.8V | | | | 90% |
| LDP40S480-C070BR | 48V | 9-48Vdc | 0.48V | 700mA | 56Vdc | 33.60W | 86% |
| LDP40S480-C070B | 48V | 32-48Vdc | 4.8V | | | | 88% |

Note : Ripple and Noise are measured at 20MHz bandwidth with a 0.1uF ceramic capacitor and 10uF aluminum capacitor.

All specifications are Typical at nominal line, full load and 25°C unless otherwise noted

Order Information:

| Series | Output(W) | IP Code | Output Voltage | Dimming Function | Rated Output Current | Input Voltage | Ripple Noise |
|--------|-----------|--------------------------|----------------|--|----------------------|-----------------|--|
| LDP | 40 | X | XXX | X | XXX | B | X |
| | | S : Single O/P with IP64 | 240 : 24V | C : No dimming D : DALI dimming P : PWM 1-10V, Potentiometer | 24V | B : 100-277 Vac | R : 1% output ripple and noise or Blank : 10% output ripple and noise |
| | | | 360 : 36V | | 36V | | |
| | | | 480 : 48V | | 48V | | |
| | | A : Single O/P with IP67 | 240 : 24V | | 24V | | |
| | | | 360 : 36V | | 36V | | |
| | | | 480 : 48V | | 48V | | |

Specifications

INPUT SPECIFICATIONS:

AC Input Voltage 90~305Vac
 Frequency 50/60Hz
 Power Factor.....115Vac/230Vac.....PF≥0.9 at 75%~100%Load
 Inrush Current <5A After 100uS @240Vac, Cold Start @25°C
 Leakage Current0.75mA max
 No load Consumption.....2W typ(Note 1)

OUTPUT SPECIFICATIONS:

Maximum Output Voltage..... See Table
 Constant Current Accuracy...(note 2).....±5%max.
 Current Line Regulation(note 3).....±5%max.
 Current Load Regulation(note 4).....±5%max.
 Start up time.....0.5 second max.
 Over Voltage Protection.....TVS Clamp
 Short Circuit Protection..... Hiccup Mode, Auto Recovery
 Over Temperature Protection.....105°C typ.

GENERAL SPECIFICATIONS:

Efficiency.....See Table
 Temperature Coefficient.....±0.05%/°C (0~50°C)
 Isolation voltage, Input to output.....3.75KVac
 Isolation resistance, Input to output.....10⁸Ω min.
 Operating Ambient Temperature-40 ~ 70°C (see derating curve)
 Cooling.....natural convection
 Storage Temperature..... -40 ~ 85°C
 Operating Humidity.....20%~95%RH non-condensing.
 Operating Altitude.....Sea Level to 3000m
 MTBF,MIL-HDBK-217F(25°C Ta) 200K hrs.
 Dimensions.....6.614x1.575x0.992 inch (168.00x40.00x25.20mm)
 Weight.....350g

LDP40 Series Derating Curve



SAFETY AND EMISSIONS:

SafetyUL8750, IEC/EN61347-1
 IEC/EN61347-2-13,
 EMI.....FCC Part 15/EN55015 Class B
 EMS.....EN61547,EN61000-4-2,3,4,5,
 EN61000-3-2 Harmonic Class C,EN61000-3-3

NOTE:

- 1.No load power consumption 1W will be introduced in Sep. 2014.
2. Current accuracy is set at nominal input voltage and full load.
3. Line regulation is measured from High Line to Low Line with full load.
4. Load regulation is measured minimum to maximum of the constant current region
5. Nominal Input Voltage at 230Vac
6. The input/output wires accessibility shall be evaluated during final system assembly.

All specifications are Typical at nominal line, full load and 25°C unless otherwise noted

Mechanical Specification


Standard Cable for LDP40Sxxx-CxxxBx

All Dimensions are in inches(mm)
 Tolerance: Inches: X.XXX±0.02
 Millimeters: X.XX±0.5



Standard Cable for LDP40Sxxx-DxxxBR, LDP40Sxxx-PxxxBR, LDP40Axxx-xxxxBR

All Dimensions are in inches(mm)
 Tolerance: Inches: X.XXX±0.02
 Millimeters: X.XX±0.5

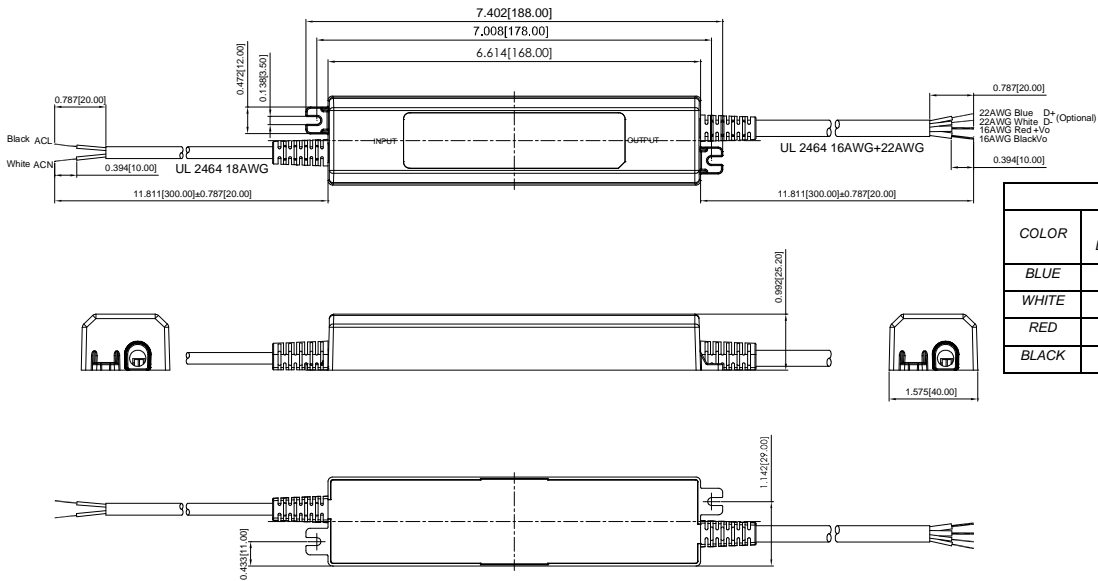

| WIRE CONNECTION | | | |
|-----------------|------------|-------------|--------------|
| COLOR | NO DIMMING | PWM DIMMING | DALI DIMMING |
| BLUE | (N.A.) | D+ | DA |
| WHITE | (N.A.) | D- | DA |
| RED | +VO | +VO | +VO |
| BLACK | -VO | -VO | -VO |

All specifications are Typical at nominal line , full load and 25°C unless otherwise noted