

THIS DRAWING IS UNPUBLISHED.


RELEASED FOR PUBLICATION

REVISIONS

© COPYRIGHT - By -

ALL RIGHTS RESERVED.

P	LTR	DESCRIPTION	DATE	DWN	APVD
	C	REVISE PER ECO-16-001738	23NOV15	LN	RS

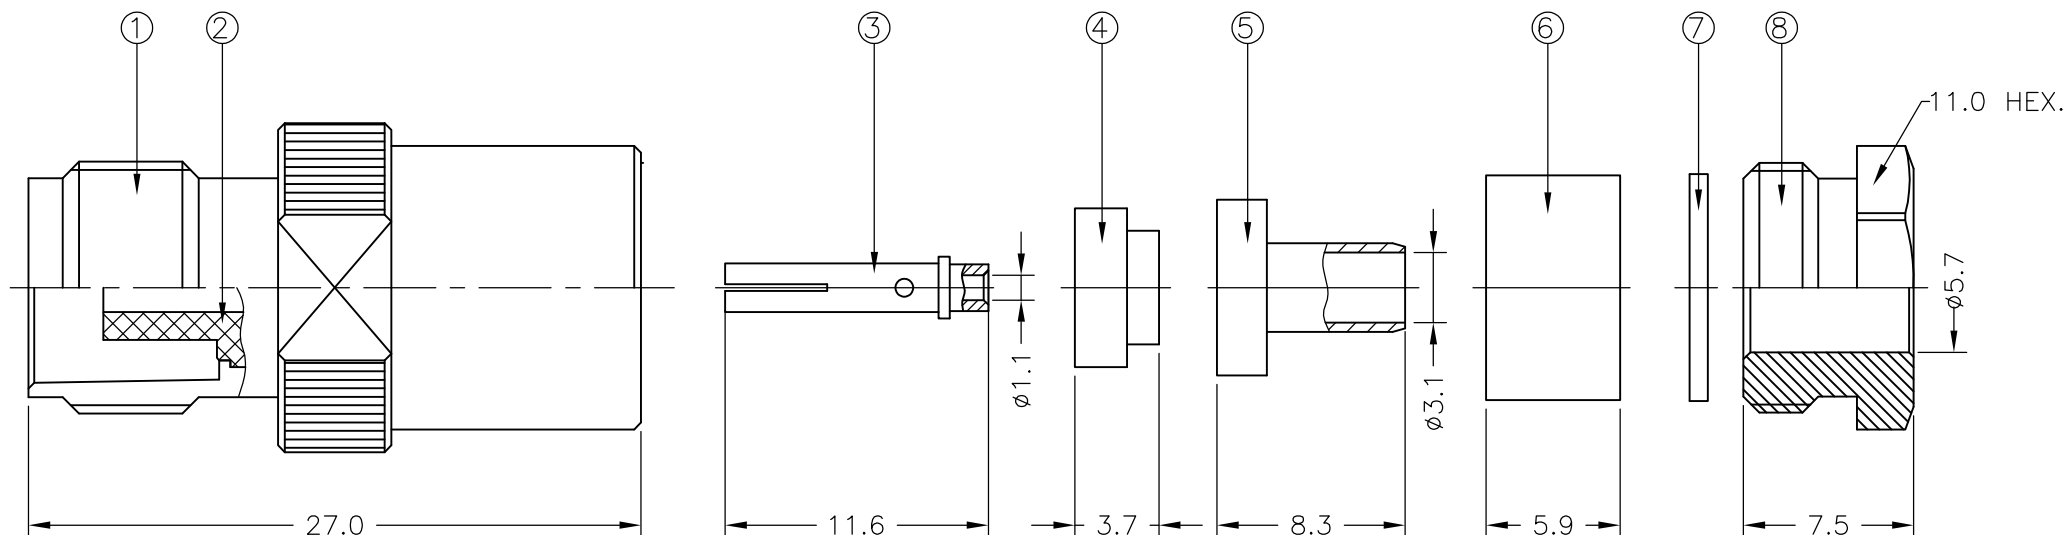

NOTES:

1 SINGLE PACKING: ONE CONNECTOR PER LABELED BAG PACKAGED. LABELED PER TEC-107-115

2 TRAY PACKAGED

3 Ag PLATING

4 WHITE

5 For use on cables: RG58C/U, 141A/U, URM43, 76,

6 ELECTRICAL CHARACTERISTICS

FREQUENCY RANGE:	DC - 4 GHz
NOMINAL IMPEDANCE:	50 Ohm
INSULATION RESISTANCE:	5000 MOhm Min
WORKING VOLTAGE:	500 VRMS at Sea Level
DIELECTRIC WITHSTAND VOLTAGE:	1500 V (AC) Max
CONTACT RESISTANCE:	
CENTER CONTACT:	1.5 mOhm Max
OUTER CONTACT:	1 mOhm Max
VSWR @ 4GHz:	1.3 Max

7 MECHANICAL CHARACTERISTICS

DURABILITY: 500 Cycles Min

8 ENVIRONMENTAL CHARACTERISTICS

OPERATING TEMPERATURE: -65 to +165 °C

QTY	QTY	MATERIAL	DESCRIPTION	ITEM
1	1	BRASS	NUT	8
-	-	BRASS	WASHER	7
1	1	SILICON RUBBER	RUBBER INSERT	6
-	-	BRASS	CLAMP	5
1	1	PTFE	INSULATOR 2	4
1	1	BRONZE	CENTER CONTACT	3
-	-	PTFE	INSULATOR 1	2
1	1	BRASS	SHELL	1
1--1	1--0	MATERIAL	DESCRIPTION	ITEM

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN A.BEKEN 21NOV2001	TE Connectivity TNC STRAIGHT JACK SOLDER (PS) 50 Ohm RG58			
DIMENSIONS: mm		CHK R.G 21NOV2001				
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD F.W-KING 21NOV2001				
0 PLC ± - 1 PLC ± - 2 PLC ± - 3 PLC ± - 4 PLC ± - ANGLES ± -		NAME				
MATERIAL		PRODUCT SPEC	SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO
FINISH		APPLICATION SPEC	411-3274	A300779	C-1478416	-
		WEIGHT	CUSTOMER DRAWING		SCALE	SHEET
					1:1	1 OF 1
						REV C