


- 1 CONTACT: 1 TO 4
SUITABLE SCREW CONTACTS: SERIES HA.3
OUTER DIMENSIONS OF INSULATION: MAX. Ø3,4 MM
- 2 GROUNDING CONTACT:
SUITABLE SCREW CONTACTS: SERIES HA.4
OUTER DIMENSIONS OF INSULATION: MAX. Ø3,4 MM
- 3 SUITABLE HOOD SIZE 1: SERIES HA; HD; EMV AND HIP
- 4 SUITABLE INSERTION AND EXTRACTION TOOL:
SCREWDRIVER 2,0x65
- 5 STANDARDS:
DIN EN 61984; DIN EN 60664-1
- 6 POLARIZATION RIPS
- 7 POS. 8 AND POS.9 PACKED SEPARATE IN POLY BAG
- 8 AUTHORIZATION: UL; CSA; VDE; SEV
- 9 PACKAGING:
10 SETS IN A CARTON, PRE-MOUNTED

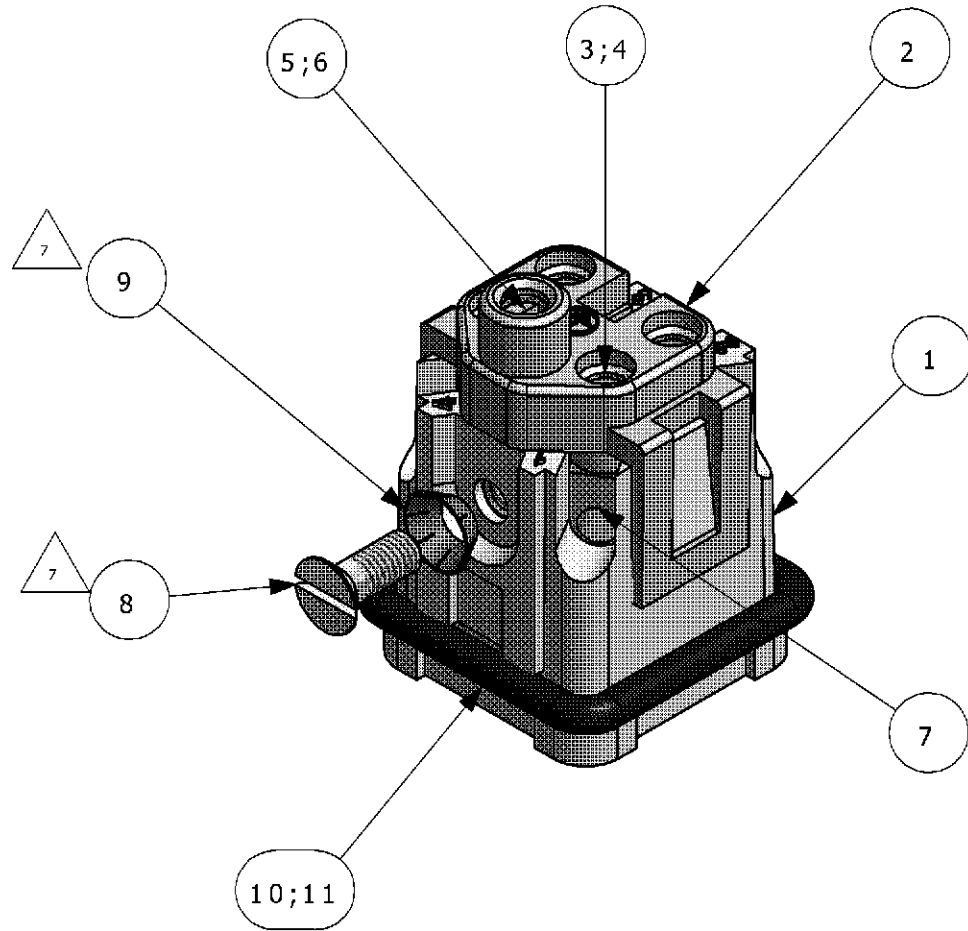

10A 250V
4KV 3
HA.4.Stl.o.DI
0-1103402-3

A diagram of a 4-pin connector. The pins are numbered 1, 2, 3, and 4. Pin 1 is on the left, pin 2 is on the right, pin 3 is on the top right, and pin 4 is on the top left. The connector has a central rectangular slot and a small circular feature in the center.

[illegible]

THIS DRAWING IS A CONTROLLED DOCUMENT FOR AMP INCORPORATED IT IS SUBJECT TO CHANGE AND THE CONTROLLING ENGINEERING ORGANIZATION SHOULD BE CONTACTED FOR THE LATEST REVISION DIESES ZEICHNUNGSDOKUMENT WIRD DURCH AMP INCORPORATED KONTROLLIERT. KÄNDERUNGEN, DIE DEN TECHNISCHEN FORTSCHRITT GEGEN, SIND VORBEHALTEN. DAV NENNEN LETZTGEFALLIGEN KÄNDERUNGEN ERFAHREN DIE AUF ANFRAGE.		DWN H.BRAUN 29.07.1997			
		CHK SCHWEIGER 29.07.1997			
DIMENSIONS: DIMENSIONEN: mm		TOLERANCES UNLESS OTHERWISE SPECIFIED: ALLGEMEINER TOLERANZEN		NAME T.SCHNURPFEL	
m. ISO 1015 m. ISO 2768 - m. DIN 15901 - 140		m-E 140		APVD 27.03.2006	
		Ø PLC 1 PLC 2 PLC 3 PLC ANGLES / WINKEL		MALE INSERT HA.4.ST1.S 108-74008	
				PRODUCT SPEC. PRODUKTSPEZ. 114-74010	
				APPLICATION SPEC. VERARBEITUNGSSPEZ. 114-74010	
MATERIAL		FINISH / OBERFLÄCHE / FARBE		SIZE A2	CAGE CODE 00779
				DRAWING NO ZEICHNUNGS-NR. 1103402	
				RESTRICTED TO NUR FUER	
CUSTOMER DRAWING / KUNDENZEICHNUNG				SCALE MASSSTAB 1:1	SHEET BLATT 1 OF VON 1
				REV. C2	