


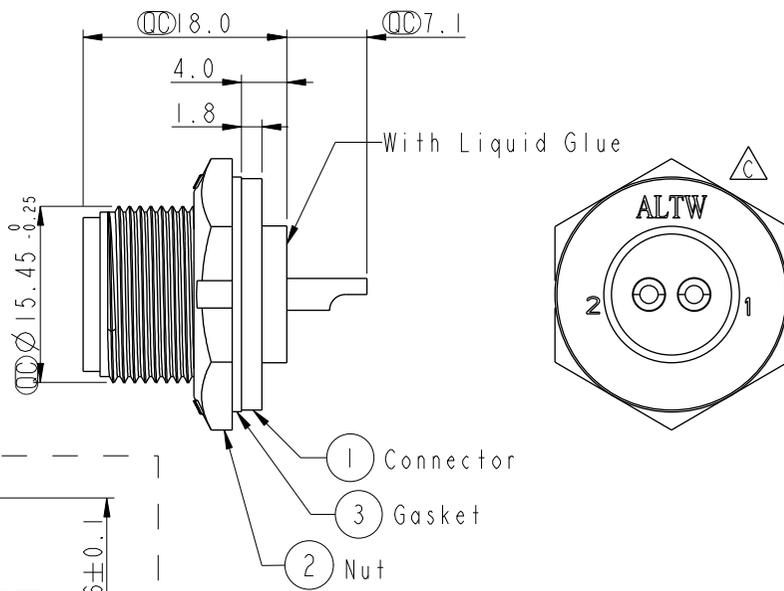




| REV. | ECN NO. | DATE | SIGN | DESCRIPTION |
|------|------------|------------|------|---------------------------|
| B | LEN-8B0422 | 2008/09/10 | Shin | Add Note |
| C | LEN1730268 | 2017/03/14 | Ruru | Change Logo & Modify Note |
| D | CI90274 | 2019/02/19 | Ruru | Modify Note |

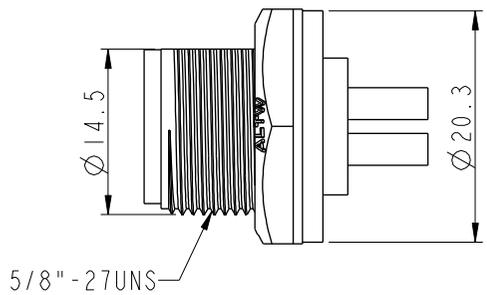

- Note:
- * Important Dimension To Check.
 - * Waterproof Rate: IP67, Unmated
 - * Housing: Thermoplastic, Black
 - * Pin: Copper Alloy, Gold Plated
 - * Nut: Thermoplastic, Black
 - * Gasket: Rubber, Black
 - * Use with waterproof cap or dust cap
Panel Thickness Max: 3.0mm
 - * Use without waterproof cap or dust cap
Panel Thickness Max: 4.0mm
 - * Gasket and Nut are packed separately in PE bags.



Pin Assignments
Front View

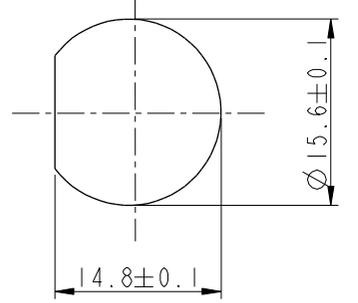

Recommended Panel Cut-Out

| | | | | | | | | | | |
|---------------|------------|----------|-----------|--|-------------------|--------------|------------------|-----------------------------|--------------------|--------------------|
| A | UNIT:mm | | | TITLE Standard, Panel Screw 2Pin M Conn F Pin | | Amphenol LTW | | ITEM NO BB-02PMFS-SC7001 | DRAWN BY Ruru | DATE 2019-02-19 |
| | TOLERANCE | .X ±0.25 | | SCALE 1:1 | SIZE A4 | SHEET 1 | OF 1 | DWG NO BB-02PMFS-SC7001 | CHECKED BY Rita | DATE 2019-02-19 |
| | .XX ±0.1 | | REV. D | WC-REV. A.3 | : Inspection item | | CUSTOMER ALTW | APPROVED BY Max | DATE 2019-02-19 | |
| | .XXX ±0.05 | | | | | | | | | |
| ANGLES ±1° | | | | | | | | | | |

安費諾亮泰企業股份有限公司

THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF Amphenol LTW. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY Amphenol LTW.